
RS PRO Aluminium Flat Head Blind Rivet Nut, M10 x 19mm long

Supplier Part Number: RNAFH1040

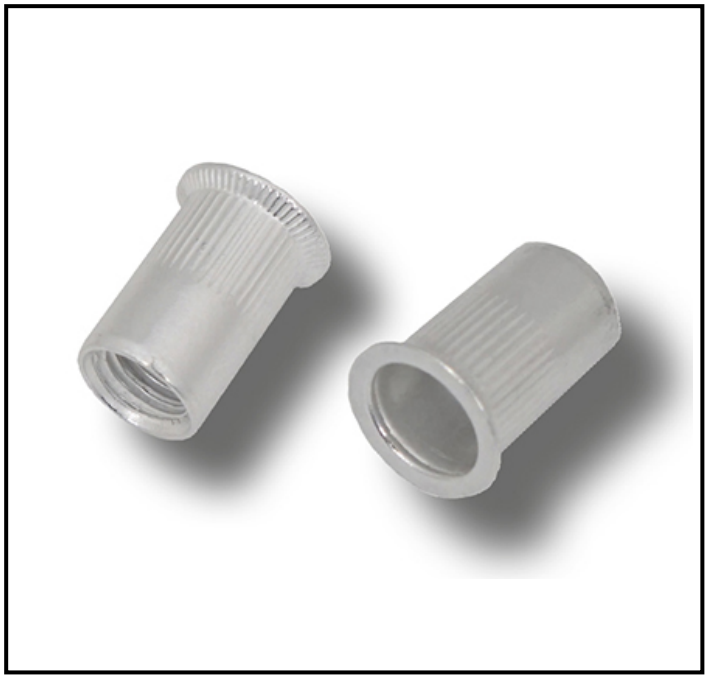

FEATURES

- **Diameter:** 12.9 mm for precise fitting
- **Fixing Hole Diameter:** 13 mm to accommodate secure installation
- **Length:** 19 mm for optimal grip range
- **Material:** Aluminium for lightweight and corrosion-resistant properties
- **Thread Size:** M10 for compatibility with standard fasteners

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

The RS PRO M10 Aluminium Rivet Nut is designed for secure fastening in various industrial applications. This rivet nut provides a reliable and durable solution for joining materials where access is only available from one side. Its aluminium construction ensures lightweight yet strong performance, making it ideal for use in demanding environments.


General Specifications


Material	Aluminium
Product Type	Rivet Nut
Sub Type	Nut
Thread Size	M10
Fixing Hole Diameter	13 mm
Head Type	Flat


Mechanical Specifications

Diameter	12.9 mm
Length	19 mm
Maximum Grip	4 mm
Minimum Grip	0.5 mm
Shear Strength	3800 N
Tensile Strength	20000 N
Maximum Tightening Torque	27 Nm

Technical Diagrams



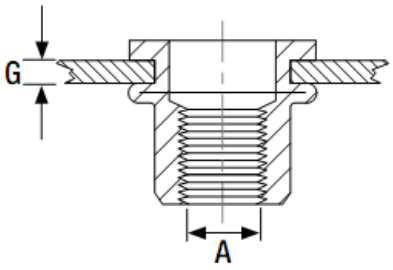



Thread Size mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Body Diameter mm	Flange Diameter mm	Flange Thickness mm	Body Overall Length mm	Max Tightening Torque Nm	Tensile Strength N	Box Quantity
A	G	G		B	H	T	L			
M3	0.5	1.5	5.0	4.9	8.0	1.0	9.0	0.7	2500	2000
M4	0.5	2.0	6.0	5.9	9.0	1.0	10.5	2.0	3600	1500
	0.5	2.5	6.0	5.9	9.0	1.0	13.0	2.0	3600	1000
M5	5.5	8.0	7.0	6.9	10.0	1.0	20.0	4.0	5500	500
M6	0.5	2.5	9.0	8.9	12.3	1.0	15.0	6.0	8300	500
	2.5	4.5	9.0	8.9	12.3	1.0	19.5	6.0	8300	400
	4.5	6.5	9.0	8.9	12.3	1.0	21.0	6.0	8300	300
M8	1.0	3.0	11.0	10.9	14.5	1.0	16.5	15.0	13000	300
	3.0	5.5	11.0	10.9	14.5	1.0	21.0	15.0	13000	250
	5.5	8.0	11.0	10.9	14.5	1.0	23.5	15.0	13000	200
M10	0.5	4.0	13.0	12.9	16.5	1.6	19.0	27.0	20000	150
	4.0	6.5	13.0	12.9	16.5	1.6	24.0	27.0	20000	100
M12	1.0	4.0	16.0	15.9	22.0	2.0	25.0	45.0	28000	100