
RS PRO Aluminium Flat Head Blind Rivet Nut, M10 x 24mm long

Supplier Part Number: RNAFH1065

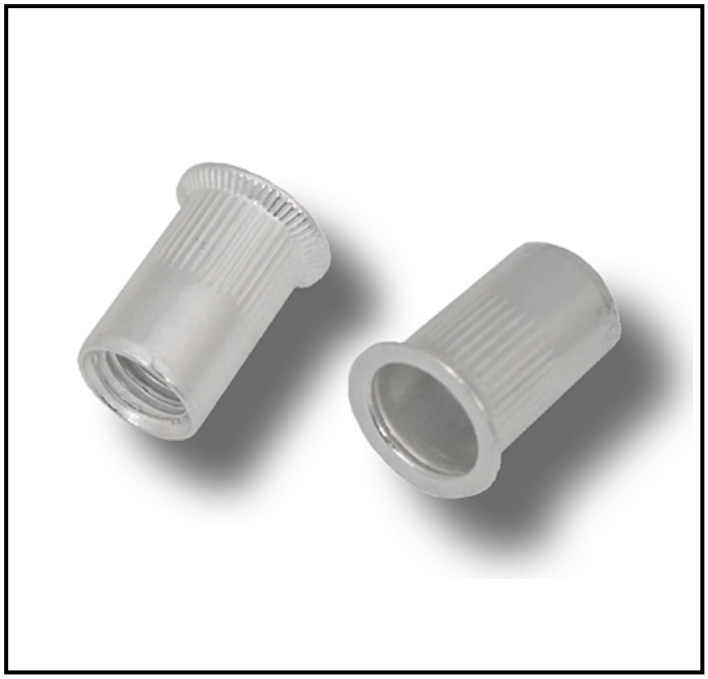

FEATURES

- **Material:** Aluminium construction ensures lightweight and corrosion resistance
- **Thread Size:** M10 thread size for compatibility with standard bolts
- **Diameter:** 12.9 mm diameter for precise fitting
- **Fixing Hole Diameter:** 13 mm fixing hole diameter for easy installation
- **Length:** 24 mm length for secure and stable fastening

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

This RS PRO M10 Aluminium Rivet Nut is designed for secure fastening in various industrial applications. It provides a reliable solution for joining materials where access is only available from one side. The main benefit is its ease of installation and strong hold.


General Specifications


Material	Aluminium
Product Type	Rivet Nut
Sub Type	Nut
Thread Size	M10
Fixing Hole Diameter	13 mm
Head Type	Flat


Mechanical Specifications

Diameter	12.9 mm
Length	24 mm
Maximum Grip	6.5 mm
Minimum Grip	4 mm
Shear Strength	3800 N
Tensile Strength	20000 N
Maximum Tightening Torque	27 Nm

Technical Diagrams



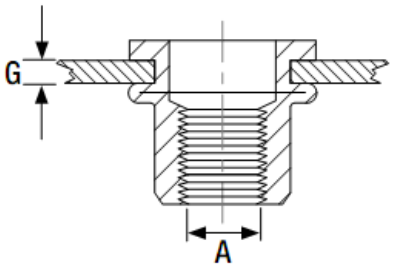



Thread Size mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Body Diameter mm	Flange Diameter mm	Flange Thickness mm	Body Overall Length mm	Max Tightening Torque Nm	Tensile Strength N	Box Quantity
A	G	G		B	H	T	L			
M3	0.5	1.5	5.0	4.9	8.0	1.0	9.0	0.7	2500	2000
M4	0.5	2.0	6.0	5.9	9.0	1.0	10.5	2.0	3600	1500
	0.5	2.5	6.0	5.9	9.0	1.0	13.0	2.0	3600	1000
M5	5.5	8.0	7.0	6.9	10.0	1.0	20.0	4.0	5500	500
M6	0.5	2.5	9.0	8.9	12.3	1.0	15.0	6.0	8300	500
	2.5	4.5	9.0	8.9	12.3	1.0	19.5	6.0	8300	400
	4.5	6.5	9.0	8.9	12.3	1.0	21.0	6.0	8300	300
M8	1.0	3.0	11.0	10.9	14.5	1.0	16.5	15.0	13000	300
	3.0	5.5	11.0	10.9	14.5	1.0	21.0	15.0	13000	250
	5.5	8.0	11.0	10.9	14.5	1.0	23.5	15.0	13000	200
M10	0.5	4.0	13.0	12.9	16.5	1.6	19.0	27.0	20000	150
	4.0	6.5	13.0	12.9	16.5	1.6	24.0	27.0	20000	100
M12	1.0	4.0	16.0	15.9	22.0	2.0	25.0	45.0	28000	100