RS PRO Carbon Steel Countersunk Head Blind Rivet Nut, M6 x 25.5mm long

Supplier Part Number: RNSCHC0660



FEATURES

- **Material:** Carbon Steel: Offers strength and durability for long-lasting performance.
- **Finish:** Trivalent Chromate and Zinc: Provides excellent corrosion resistance.
- **Thread Size:** M6: Compatible with a wide range of applications.
- **Diameter:** 8.9 mm: Ensures a snug fit in pre-drilled holes.
- **Fixing Hole Diameter:** 9 mm: Facilitates easy installation.
- **Length:** 25.5 mm: Suitable for various material thicknesses.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

The RS PRO M6 Rivet Nut is designed for secure fastening in a variety of industrial applications. Made from durable carbon steel, this rivet nut provides reliable performance in demanding environments. Its trivalent chromate finish ensures corrosion resistance, making it suitable for both indoor and outdoor use.


General Specifications


Finish	Clear, Trivalent Chromate, Zinc
Material	Carbon Steel
Product Type	Rivet Nut
Sub Type	Nut
Thread Size	M6
Fixing Hole Diameter	9 mm
Head Type	Countersunk


Mechanical Specifications

Diameter	8.9 mm
Length	25.5 mm
Maximum Grip	6 mm
Minimum Grip	4 mm
Shear Strength	3000 N
Tensile Strength	15000 N
Maximum Tightening Torque	10 Nm

Technical Diagrams



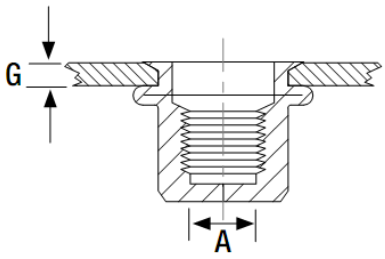



Thread Size mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Body Diameter mm	Flange Diameter mm	Flange Thickness mm	Body Overall Length mm	Max Tightening Torque Nm	Tensile Strength N	Box Quantity
A	G	G		B	H	T	L			
M3	1.5	2.5	5.0	4.9	7.5	1.5	15.5	1.0	3900	1000
	2.5	4.0	5.0	4.9	7.5	1.5	17.5	1.0	3900	1000
M4	1.5	3.0	6.0	5.9	9.0	1.5	17.5	3.0	6800	1000
	3.0	5.0	6.0	5.9	9.0	1.5	19.5	3.0	6800	500
M5	1.5	3.5	7.0	6.9	10.0	1.5	19.5	6.0	10000	500
	3.5	5.0	7.0	6.9	10.0	1.5	23.5	6.0	10000	300
M6	1.5	4.0	9.0	8.9	12.0	1.5	23.5	10.0	15000	300
	4.0	6.0	9.0	8.9	12.0	1.5	25.5	10.0	15000	200
M8	1.5	4.5	11.0	10.9	14.0	1.5	26.5	24.0	27000	250
	4.5	6.0	11.0	10.9	14.0	1.5	29.5	24.0	27000	250
M10	1.5	5.0	13.0	12.9	16.0	1.5	30.0	32.0	28500	200
	4.5	6.5	13.0	12.9	16.0	1.5	32.5	32.0	28500	100