RS PRO Carbon Steel Countersunk Head Blind Rivet Nut, M8 x 26.5mm long

Supplier Part Number: RNSCHC0845



FEATURES

- **Material:** Carbon Steel: Provides strength and durability for long-lasting use.
- **Finish:** Clear Trivalent Chromate Zinc: Offers corrosion resistance for extended lifespan.
- **Thread Size:** M8: Ensures compatibility with standard M8 fasteners.
- **Diameter:** 10.9 mm: Suitable for precise fitting in designated holes.
- **Fixing Hole Diameter:** 11 mm: Allows for easy installation and secure attachment.
- **Length:** 26.5 mm: Provides adequate grip length for various material thicknesses.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

This RS PRO M8 Rivet Nut is designed for secure fastening in various industrial applications. Made from durable carbon steel, it offers reliable performance in demanding environments. The rivet nut is ideal for applications requiring a strong, permanent thread in thin materials.


General Specifications


Finish	Clear, Trivalent Chromate, Zinc
Material	Carbon Steel
Product Type	Rivet Nut
Sub Type	Nut
Thread Size	M8
Fixing Hole Diameter	11 mm
Head Type	Countersunk


Mechanical Specifications

Diameter	10.9 mm
Length	26.5 mm
Maximum Grip	4.5 mm
Minimum Grip	1.5 mm
Shear Strength	4400 N
Tensile Strength	27000 N
Maximum Tightening Torque	24 Nm

Technical Diagrams



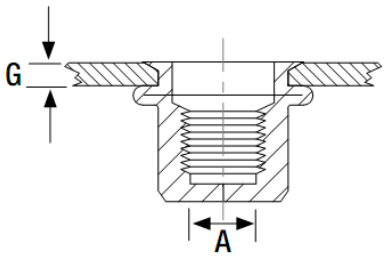



Thread Size mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Body Diameter mm	Flange Diameter mm	Flange Thickness mm	Body Overall Length mm	Max Tightening Torque Nm	Tensile Strength N	Box Quantity
A	G	G		B	H	T	L			
M3	1.5	2.5	5.0	4.9	7.5	1.5	15.5	1.0	3900	1000
	2.5	4.0	5.0	4.9	7.5	1.5	17.5	1.0	3900	1000
M4	1.5	3.0	6.0	5.9	9.0	1.5	17.5	3.0	6800	1000
	3.0	5.0	6.0	5.9	9.0	1.5	19.5	3.0	6800	500
M5	1.5	3.5	7.0	6.9	10.0	1.5	19.5	6.0	10000	500
	3.5	5.0	7.0	6.9	10.0	1.5	23.5	6.0	10000	300
M6	1.5	4.0	9.0	8.9	12.0	1.5	23.5	10.0	15000	300
	4.0	6.0	9.0	8.9	12.0	1.5	25.5	10.0	15000	200
M8	1.5	4.5	11.0	10.9	14.0	1.5	26.5	24.0	27000	250
	4.5	6.0	11.0	10.9	14.0	1.5	29.5	24.0	27000	250
M10	1.5	5.0	13.0	12.9	16.0	1.5	30.0	32.0	28500	200
	4.5	6.5	13.0	12.9	16.0	1.5	32.5	32.0	28500	100