RS PRO Carbon Steel Countersunk Head Blind Rivet Nut, M8 x 29.5mm long

Supplier Part Number: RNSCHC0860



FEATURES

- **Material:** Carbon Steel: Ensures durability and strength for long-lasting use.
- **Finish:** Clear Trivalent Chromate Zinc: Provides excellent corrosion resistance.
- **Thread Size:** M8: Compatible with a wide range of applications.
- **Diameter:** 10.9 mm: Suitable for precise fitting requirements.
- **Fixing Hole Diameter:** 11 mm: Allows for easy installation.
- **Length:** 29.5 mm: Offers flexibility in various assembly scenarios.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

The RS PRO M8 Rivet Nut is designed for secure fastening in various industrial applications. Made from durable carbon steel, this rivet nut provides reliable performance and is ideal for use in environments where strength and corrosion resistance are essential.


General Specifications


Finish	Clear, Trivalent Chromate, Zinc
Material	Carbon Steel
Product Type	Rivet Nut
Sub Type	Nut
Thread Size	M8
Fixing Hole Diameter	11 mm
Head Type	Countersunk


Mechanical Specifications

Diameter	10.9 mm
Length	29.5 mm
Maximum Grip	6 mm
Minimum Grip	4.5 mm
Shear Strength	4400 N
Tensile Strength	27000 N
Maximum Tightening Torque	24 Nm

Technical Diagrams



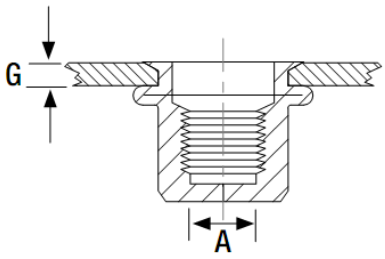



Thread Size mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Body Diameter mm	Flange Diameter mm	Flange Thickness mm	Body Overall Length mm	Max Tightening Torque Nm	Tensile Strength N	Box Quantity
A	G	G		B	H	T	L			
M3	1.5	2.5	5.0	4.9	7.5	1.5	15.5	1.0	3900	1000
	2.5	4.0	5.0	4.9	7.5	1.5	17.5	1.0	3900	1000
M4	1.5	3.0	6.0	5.9	9.0	1.5	17.5	3.0	6800	1000
	3.0	5.0	6.0	5.9	9.0	1.5	19.5	3.0	6800	500
M5	1.5	3.5	7.0	6.9	10.0	1.5	19.5	6.0	10000	500
	3.5	5.0	7.0	6.9	10.0	1.5	23.5	6.0	10000	300
M6	1.5	4.0	9.0	8.9	12.0	1.5	23.5	10.0	15000	300
	4.0	6.0	9.0	8.9	12.0	1.5	25.5	10.0	15000	200
M8	1.5	4.5	11.0	10.9	14.0	1.5	26.5	24.0	27000	250
	4.5	6.0	11.0	10.9	14.0	1.5	29.5	24.0	27000	250
M10	1.5	5.0	13.0	12.9	16.0	1.5	30.0	32.0	28500	200
	4.5	6.5	13.0	12.9	16.0	1.5	32.5	32.0	28500	100