RS PRO Carbon Steel Flat Head Blind Rivet Nut, M10 x 27mm long

Supplier Part Number: RNSFH1090



FEATURES

- **Material:** Carbon steel construction ensures durability and strength.
- **Finish:** Clear trivalent chromate zinc finish offers excellent corrosion resistance.
- **Thread Size:** M10 thread size for compatibility with standard fasteners.
- **Diameter:** 12.9 mm diameter for secure fitting.
- **Fixing Hole Diameter:** 13 mm for easy installation.
- **Length:** 27 mm length suitable for various applications.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

The RS PRO M10 Rivet Nut is designed for secure fastening in a variety of industrial applications. Made from durable carbon steel, this rivet nut provides reliable performance and is ideal for use in environments where strength and corrosion resistance are essential.


General Specifications


Finish	Clear, Trivalent Chromate, Zinc
Material	Carbon Steel
Product Type	Rivet Nut
Sub Type	Nut
Thread Size	M10
Fixing Hole Diameter	13 mm
Head Type	Flat


Mechanical Specifications

Diameter	12.9 mm
Length	27 mm
Maximum Grip	9 mm
Minimum Grip	6.5 mm
Shear Strength	5000 N
Tensile Strength	28500 N
Maximum Tightening Torque	32 Nm

Technical Diagrams



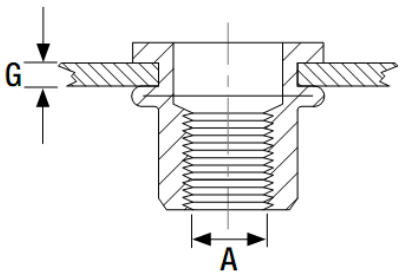



Thread Size mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Body Diameter mm	Flange Diameter mm	Flange Thickness mm	Body Overall Length mm	Max Tightening Torque Nm	Tensile Strength N	Box Quantity
A	G	G		B	H	T	L			
M3	0.5	1.5	5.0	4.9	8.0	0.8	10.0	1.0	3900	2000
	2.0	3.5	5.0	4.9	8.0	0.8	11.5	1.0	3900	2000
M4	0.5	2.0	6.0	5.9	9.0	0.9	10.5	3.0	6800	1500
	2.0	3.5	6.0	5.9	9.0	0.9	12.0	3.0	6800	1500
M5	0.5	2.5	7.0	6.9	10.0	1.0	13.0	6.0	10000	1000
	2.5	5.0	7.0	6.9	10.0	1.0	16.5	6.0	10000	500
	5.0	8.0	7.0	6.9	10.0	1.0	19.0	6.0	10000	350
M6	0.5	3.0	9.0	8.9	12.3	1.3	15.5	10.0	15000	500
	3.0	5.5	9.0	8.9	12.3	1.3	19.5	10.0	15000	400
	5.5	8.0	9.0	8.9	12.3	1.3	21.0	10.0	15000	300
M8	1.0	3.5	11.0	10.9	14.5	1.5	18.5	24.0	27000	250
	3.5	6.0	11.0	10.9	14.5	1.5	21.0	24.0	27000	250
	5.0	8.0	11.0	10.9	14.5	1.5	23.0	24.0	27000	200
M10	1.0	4.0	13.0	12.9	17.0	1.7	21.5	32.0	28500	250
	4.0	6.5	13.0	12.9	17.0	1.7	24.0	32.0	28500	200
	6.5	9.0	13.0	12.9	17.0	1.7	27.0	32.0	28500	100
M12	1.0	4.0	16.0	15.9	22.0	2.0	25.0	44.0	48000	100
	3.5	6.0	16.0	15.9	22.0	2.0	28.0	44.0	48000	80