RS PRO Carbon Steel Flat Head Blind Rivet Nut, M4 x 11mm long

Supplier Part Number: RNSFHH0420



FEATURES

- **Material:** Carbon steel provides high strength and durability.
- **Finish:** Clear trivalent chromate zinc finish offers excellent corrosion resistance.
- **Thread Size:** M4 thread size for compatibility with standard fasteners.
- **Fixing Hole Diameter:** 6 mm fixing hole diameter for easy installation.
- **Length:** 11 mm length suitable for a range of applications.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

The RS PRO M4 Carbon Steel Rivet Nut is designed for secure fastening in a variety of materials. Ideal for applications where a strong, reliable thread is required, this rivet nut is perfect for use in sheet metal and other thin materials. Its carbon steel construction ensures durability and strength.


General Specifications


Finish	Clear, Trivalent Chromate, Zinc
Material	Carbon Steel
Product Type	Rivet Nut
Sub Type	Nut
Thread Size	M4
Fixing Hole Diameter	6 mm
Head Type	Flat


Mechanical Specifications

Diameter	5.9 mm
Length	11 mm
Maximum Grip	2 mm
Minimum Grip	0.5 mm
Shear Strength	1500 N
Tensile Strength	6800 N
Maximum Tightening Torque	4 Nm

Technical Diagrams



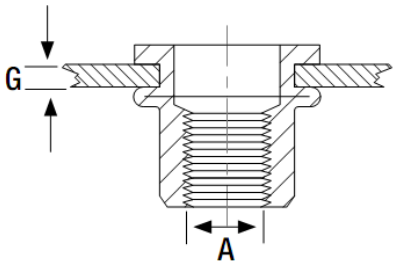



Thread Size mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Body Diameter mm	Flange Diameter mm	Flange Thickness mm	Body Overall Length mm	Max Tightening Torque Nm	Tensile Strength N	Box Quantity
A	G	G		B	H	T	L			
M4	0.5	2.0	6.0	5.9	9.0	0.8	11.0	4.0	6800	1500
	0.5	2.5	6.0	5.9	9.0	0.8	14.0	4.0	10000	1000
M5	2.5	5.0	7.0	6.9	10.0	1.0	16.5	6.5	10000	500
M6	0.5	3.0	9.0	8.9	12.7	1.3	15.0	12.0	15000	500
	3.0	5.5	9.0	8.9	12.7	1.3	19.5	12.0	15000	500
	1.0	3.5	9.0	8.9	12.7	1.3	18.0	12.0	27000	250
	3.5	5.5	9.0	8.9	12.7	1.3	21.0	12.0	27000	250
M10	1.0	3.5	13.0	12.9	18.0	1.7	21.0	42.0	28500	250
	3.5	6.0	13.0	12.9	18.0	1.7	24.0	42.0	28500	200
M12	2.0	5.0	16.0	15.9	23.0	2.0	27.0	58.0	48000	50