RS PRO Carbon Steel Flat Head Blind Rivet Nut, M5 x 16.5mm long

Supplier Part Number: RNSFHH0550



FEATURES

- **Material:** Carbon Steel ensures durability and strength.
- **Finish:** Clear Trivalent Chromate Zinc finish provides excellent corrosion resistance.
- **Thread Size:** M5 thread size for compatibility with standard fasteners.
- **Diameter:** 6.9 mm diameter for precise fitting.
- **Fixing Hole Diameter:** 7 mm for easy installation.
- **Length:** 16.5 mm length for versatile application.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

RS PRO offers a high-quality M5 Carbon Steel Rivet Nut designed for secure fastening in various industrial applications. This rivet nut provides a reliable solution for creating strong threads in thin materials, making it ideal for use in sheet metal and other lightweight assemblies.


General Specifications


Finish	Clear, Trivalent Chromate, Zinc
Material	Carbon Steel
Product Type	Rivet Nut
Sub Type	Nut
Thread Size	M5
Fixing Hole Diameter	7 mm
Head Type	Flat


Mechanical Specifications

Diameter	6.9 mm
Length	16.5 mm
Maximum Grip	5 mm
Minimum Grip	2.5 mm
Shear Strength	2000 N
Tensile Strength	10000 N
Maximum Tightening Torque	6.5 Nm

Technical Diagrams



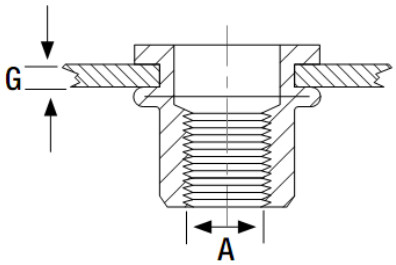



Thread Size mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Body Diameter mm	Flange Diameter mm	Flange Thickness mm	Body Overall Length mm	Max Tightening Torque Nm	Tensile Strength N	Box Quantity
A	G	G		B	H	T	L			
M4	0.5	2.0	6.0	5.9	9.0	0.8	11.0	4.0	6800	1500
	0.5	2.5	6.0	5.9	9.0	0.8	14.0	4.0	10000	1000
M5	2.5	5.0	7.0	6.9	10.0	1.0	16.5	6.5	10000	500
M6	0.5	3.0	9.0	8.9	12.7	1.3	15.0	12.0	15000	500
	3.0	5.5	9.0	8.9	12.7	1.3	19.5	12.0	15000	500
	1.0	3.5	9.0	8.9	12.7	1.3	18.0	12.0	27000	250
	3.5	5.5	9.0	8.9	12.7	1.3	21.0	12.0	27000	250
M10	1.0	3.5	13.0	12.9	18.0	1.7	21.0	42.0	28500	250
	3.5	6.0	13.0	12.9	18.0	1.7	24.0	42.0	28500	200
M12	2.0	5.0	16.0	15.9	23.0	2.0	27.0	58.0	48000	50