RS PRO Carbon Steel Flat Head Blind Rivet Nut, M6 x 15mm long

Supplier Part Number: RNSFHH0630



FEATURES

- **Material:** Carbon Steel: Provides strength and durability for long-lasting use.
- **Finish:** Clear Trivalent Chromate Zinc: Offers corrosion resistance for enhanced longevity.
- **Thread Size:** M6: Ensures compatibility with standard M6 bolts and screws.
- **Diameter:** 8.9 mm: Suitable for a range of applications requiring precise fitting.
- **Fixing Hole Diameter:** 9 mm: Allows for easy installation and secure fastening.
- **Length:** 15 mm: Provides adequate grip length for secure attachment.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

The RS PRO M6 Rivet Nut is designed for secure fastening in various industrial applications. Made from durable carbon steel, it offers reliable performance and longevity. Ideal for use in environments where strong and permanent threads are required.


General Specifications


Finish	Clear, Trivalent Chromate, Zinc
Material	Carbon Steel
Product Type	Rivet Nut
Sub Type	Nut
Thread Size	M6
Fixing Hole Diameter	9 mm
Head Type	Flat


Mechanical Specifications

Diameter	8.9 mm
Length	15 mm
Maximum Grip	3 mm
Minimum Grip	0.5 mm
Shear Strength	3000 N
Tensile Strength	15000 N
Maximum Tightening Torque	12 Nm

Technical Diagrams



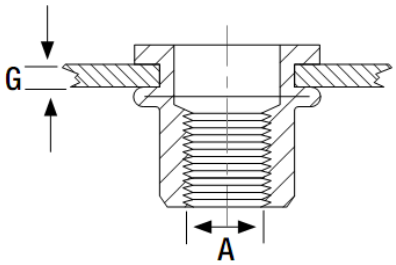



Thread Size mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Body Diameter mm	Flange Diameter mm	Flange Thickness mm	Body Overall Length mm	Max Tightening Torque Nm	Tensile Strength N	Box Quantity
A	G	G		B	H	T	L			
M4	0.5	2.0	6.0	5.9	9.0	0.8	11.0	4.0	6800	1500
	0.5	2.5	6.0	5.9	9.0	0.8	14.0	4.0	10000	1000
M5	2.5	5.0	7.0	6.9	10.0	1.0	16.5	6.5	10000	500
M6	0.5	3.0	9.0	8.9	12.7	1.3	15.0	12.0	15000	500
	3.0	5.5	9.0	8.9	12.7	1.3	19.5	12.0	15000	500
	1.0	3.5	9.0	8.9	12.7	1.3	18.0	12.0	27000	250
	3.5	5.5	9.0	8.9	12.7	1.3	21.0	12.0	27000	250
M10	1.0	3.5	13.0	12.9	18.0	1.7	21.0	42.0	28500	250
	3.5	6.0	13.0	12.9	18.0	1.7	24.0	42.0	28500	200
M12	2.0	5.0	16.0	15.9	23.0	2.0	27.0	58.0	48000	50