RS PRO Carbon Steel Flat Head Blind Rivet Nut, M6 x 19.5mm long

Supplier Part Number: RNSFHH0655



FEATURES

- **Material:** Carbon steel construction ensures strength and durability.
- **Finish:** Clear trivalent chromate and zinc finish offers excellent corrosion resistance.
- **Thread Size:** M6 thread size for compatibility with standard fasteners.
- **Fixing Hole Diameter:** 9 mm fixing hole diameter allows for easy installation.
- **Length:** 19.5 mm length provides a secure grip in materials.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

The RS PRO M6 Rivet Nut is designed for secure fastening in various industrial applications. Made from durable carbon steel, it provides reliable performance and corrosion resistance, making it ideal for use in demanding environments.


General Specifications


Finish	Clear, Trivalent Chromate, Zinc
Material	Carbon Steel
Product Type	Rivet Nut
Sub Type	Nut
Thread Size	M6
Fixing Hole Diameter	9 mm
Head Type	Flat


Mechanical Specifications

Diameter	8.9 mm
Length	19.5 mm
Maximum Grip	5.5 mm
Minimum Grip	3 mm
Shear Strength	3000 N
Tensile Strength	15000 N
Maximum Tightening Torque	12 Nm

Technical Diagrams



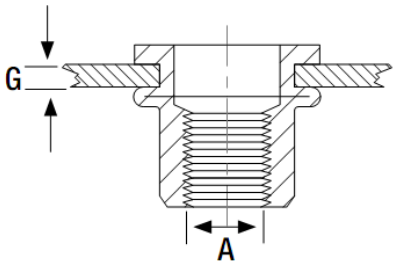



Thread Size mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Body Diameter mm	Flange Diameter mm	Flange Thickness mm	Body Overall Length mm	Max Tightening Torque Nm	Tensile Strength N	Box Quantity
A	G	G		B	H	T	L			
M4	0.5	2.0	6.0	5.9	9.0	0.8	11.0	4.0	6800	1500
	0.5	2.5	6.0	5.9	9.0	0.8	14.0	4.0	10000	1000
M5	2.5	5.0	7.0	6.9	10.0	1.0	16.5	6.5	10000	500
M6	0.5	3.0	9.0	8.9	12.7	1.3	15.0	12.0	15000	500
	3.0	5.5	9.0	8.9	12.7	1.3	19.5	12.0	15000	500
	1.0	3.5	9.0	8.9	12.7	1.3	18.0	12.0	27000	250
	3.5	5.5	9.0	8.9	12.7	1.3	21.0	12.0	27000	250
M10	1.0	3.5	13.0	12.9	18.0	1.7	21.0	42.0	28500	250
	3.5	6.0	13.0	12.9	18.0	1.7	24.0	42.0	28500	200
M12	2.0	5.0	16.0	15.9	23.0	2.0	27.0	58.0	48000	50