RS PRO Carbon Steel Flat Head Blind Rivet Nut, M8 x 21mm long

Supplier Part Number: RNSFHH0855



FEATURES

- **Material:** Carbon Steel: Offers high strength and durability for demanding applications.
- **Finish:** Clear Trivalent Chromate Zinc: Provides excellent corrosion resistance.
- **Thread Size:** M8: Compatible with standard M8 bolts and screws.
- **Diameter:** 10.9 mm: Suitable for a wide range of applications.
- **Fixing Hole Diameter:** 11 mm: Ensures a secure fit in pre-drilled holes.
- **Length:** 21 mm: Allows for versatile use in various thicknesses of materials.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

The RS PRO M8 Carbon Steel Rivet Nut is designed for secure fastening in various industrial applications. Made from durable carbon steel, it provides reliable performance in environments requiring strong and stable connections. The rivet nut is ideal for use where a threaded insert is needed in thin materials.


General Specifications


Finish	Clear, Trivalent Chromate, Zinc
Material	Carbon Steel
Product Type	Rivet Nut
Sub Type	Nut
Thread Size	M8
Fixing Hole Diameter	11 mm
Head Type	Flat


Mechanical Specifications

Diameter	10.9 mm
Length	21 mm
Maximum Grip	5.5 mm
Minimum Grip	3.5 mm
Shear Strength	4400 N
Tensile Strength	27000 N
Maximum Tightening Torque	31 Nm

Technical Diagrams



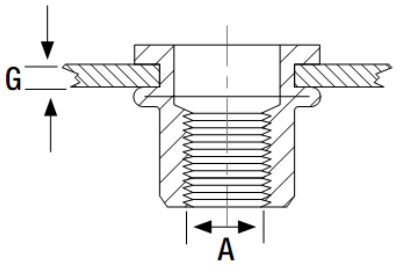



Thread Size mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Body Diameter mm	Flange Diameter mm	Flange Thickness mm	Body Overall Length mm	Max Tightening Torque Nm	Tensile Strength N	Box Quantity
A	G	G		B	H	T	L			
M4	0.5	2.0	6.0	5.9	9.0	0.8	11.0	4.0	6800	1500
	0.5	2.5	6.0	5.9	9.0	0.8	14.0	4.0	10000	1000
M5	2.5	5.0	7.0	6.9	10.0	1.0	16.5	6.5	10000	500
M6	0.5	3.0	9.0	8.9	12.7	1.3	15.0	12.0	15000	500
	3.0	5.5	9.0	8.9	12.7	1.3	19.5	12.0	15000	500
	1.0	3.5	9.0	8.9	12.7	1.3	18.0	12.0	27000	250
	3.5	5.5	9.0	8.9	12.7	1.3	21.0	12.0	27000	250
M10	1.0	3.5	13.0	12.9	18.0	1.7	21.0	42.0	28500	250
	3.5	6.0	13.0	12.9	18.0	1.7	24.0	42.0	28500	200
M12	2.0	5.0	16.0	15.9	23.0	2.0	27.0	58.0	48000	50