RS PRO Carbon Steel Flat Head Blind Rivet Nut, M10 x 21mm long

Supplier Part Number: RNSFHH1035



FEATURES

- **Material:** Carbon steel construction ensures durability and strength.
- **Finish:** Clear trivalent chromate zinc finish provides corrosion resistance.
- **Thread Size:** M10 thread size for compatibility with standard fasteners.
- **Diameter:** 12.9 mm diameter for a secure fit.
- **Fixing Hole Diameter:** 13 mm fixing hole diameter for easy installation.
- **Length:** 21 mm length suitable for various applications.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

The RS PRO M10 Rivet Nut is designed for secure fastening in various industrial applications. Made from durable carbon steel, it offers reliable performance in demanding environments. The rivet nut is ideal for applications requiring a strong, permanent thread in thin materials.


General Specifications


Finish	Clear, Trivalent Chromate, Zinc
Material	Carbon Steel
Product Type	Rivet Nut
Sub Type	Nut
Thread Size	M10
Fixing Hole Diameter	13 mm
Head Type	Flat


Mechanical Specifications

Diameter	12.9 mm
Length	21 mm
Maximum Grip	3.5 mm
Minimum Grip	1 mm
Shear Strength	5000 N
Tensile Strength	28500 N
Maximum Tightening Torque	42 Nm

Technical Diagrams



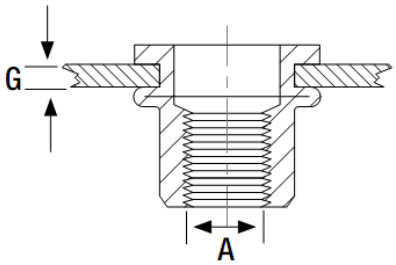



Thread Size mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Body Diameter mm	Flange Diameter mm	Flange Thickness mm	Body Overall Length mm	Max Tightening Torque Nm	Tensile Strength N	Box Quantity
A	G	G		B	H	T	L			
M4	0.5	2.0	6.0	5.9	9.0	0.8	11.0	4.0	6800	1500
	0.5	2.5	6.0	5.9	9.0	0.8	14.0	4.0	10000	1000
M5	2.5	5.0	7.0	6.9	10.0	1.0	16.5	6.5	10000	500
M6	0.5	3.0	9.0	8.9	12.7	1.3	15.0	12.0	15000	500
	3.0	5.5	9.0	8.9	12.7	1.3	19.5	12.0	15000	500
	1.0	3.5	9.0	8.9	12.7	1.3	18.0	12.0	27000	250
	3.5	5.5	9.0	8.9	12.7	1.3	21.0	12.0	27000	250
M10	1.0	3.5	13.0	12.9	18.0	1.7	21.0	42.0	28500	250
	3.5	6.0	13.0	12.9	18.0	1.7	24.0	42.0	28500	200
M12	2.0	5.0	16.0	15.9	23.0	2.0	27.0	58.0	48000	50