RS PRO Carbon Steel Flat Head Blind Rivet Nut, M10 x 24mm long

Supplier Part Number: RNSFHH1060



FEATURES

- **Material:** Carbon steel construction ensures strength and durability.
- **Finish:** Clear trivalent chromate zinc finish provides excellent corrosion resistance.
- **Thread Size:** M10 thread size for compatibility with a wide range of applications.
- **Diameter:** 12.9 mm diameter for secure fitting.
- **Fixing Hole Diameter:** 13 mm fixing hole diameter for easy installation.
- **Length:** 24 mm length for versatile use in different settings.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

RS PRO offers a high-quality M10 rivet nut designed for secure fastening in various industrial applications. Made from durable carbon steel, this rivet nut provides reliable performance and corrosion resistance, making it ideal for use in demanding environments.


General Specifications


Finish	Clear, Trivalent Chromate, Zinc
Material	Carbon Steel
Product Type	Rivet Nut
Sub Type	Nut
Thread Size	M10
Fixing Hole Diameter	13 mm
Head Type	Flat


Mechanical Specifications

Diameter	12.9 mm
Length	24 mm
Maximum Grip	6 mm
Minimum Grip	3.5 mm
Shear Strength	5000 N
Tensile Strength	28500 N
Maximum Tightening Torque	42 Nm

Technical Diagrams



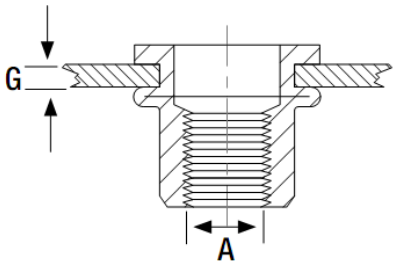



Thread Size mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Body Diameter mm	Flange Diameter mm	Flange Thickness mm	Body Overall Length mm	Max Tightening Torque Nm	Tensile Strength N	Box Quantity
A	G	G		B	H	T	L			
M4	0.5	2.0	6.0	5.9	9.0	0.8	11.0	4.0	6800	1500
	0.5	2.5	6.0	5.9	9.0	0.8	14.0	4.0	10000	1000
M5	2.5	5.0	7.0	6.9	10.0	1.0	16.5	6.5	10000	500
M6	0.5	3.0	9.0	8.9	12.7	1.3	15.0	12.0	15000	500
	3.0	5.5	9.0	8.9	12.7	1.3	19.5	12.0	15000	500
	1.0	3.5	9.0	8.9	12.7	1.3	18.0	12.0	27000	250
	3.5	5.5	9.0	8.9	12.7	1.3	21.0	12.0	27000	250
M10	1.0	3.5	13.0	12.9	18.0	1.7	21.0	42.0	28500	250
	3.5	6.0	13.0	12.9	18.0	1.7	24.0	42.0	28500	200
M12	2.0	5.0	16.0	15.9	23.0	2.0	27.0	58.0	48000	50