RS PRO Carbon Steel Flat Head Blind Rivet Nut, M12 x 27mm long

Supplier Part Number: RNSFHH1250



FEATURES

- **Material:** Carbon steel construction ensures durability and strength.
- **Finish:** Clear trivalent chromate and zinc finish offers corrosion resistance.
- **Diameter:** 15.9 mm diameter for compatibility with a range of applications.
- **Fixing Hole Diameter:** 16 mm fixing hole diameter for easy installation.
- **Thread Size:** M12 thread size for secure fastening.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

The RS PRO M12 Rivet Nut is designed for secure fastening in various industrial applications. Made from durable carbon steel, this rivet nut provides reliable performance and is ideal for use in environments requiring strong and stable connections.


General Specifications


Finish	Clear, Trivalent Chromate, Zinc
Material	Carbon Steel
Product Type	Rivet Nut
Sub Type	Nut
Thread Size	M12
Fixing Hole Diameter	16 mm
Head Type	Flat


Mechanical Specifications

Diameter	15.9 mm
Length	27 mm
Maximum Grip	5 mm
Minimum Grip	2 mm
Shear Strength	6500 N
Tensile Strength	48000 N
Maximum Tightening Torque	58 Nm

Technical Diagrams



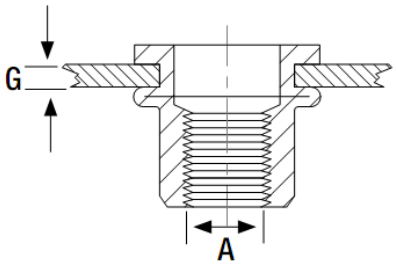



Thread Size mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Body Diameter mm	Flange Diameter mm	Flange Thickness mm	Body Overall Length mm	Max Tightening Torque Nm	Tensile Strength N	Box Quantity
A	G	G		B	H	T	L			
M4	0.5	2.0	6.0	5.9	9.0	0.8	11.0	4.0	6800	1500
	0.5	2.5	6.0	5.9	9.0	0.8	14.0	4.0	10000	1000
M5	2.5	5.0	7.0	6.9	10.0	1.0	16.5	6.5	10000	500
M6	0.5	3.0	9.0	8.9	12.7	1.3	15.0	12.0	15000	500
	3.0	5.5	9.0	8.9	12.7	1.3	19.5	12.0	15000	500
	1.0	3.5	9.0	8.9	12.7	1.3	18.0	12.0	27000	250
	3.5	5.5	9.0	8.9	12.7	1.3	21.0	12.0	27000	250
M10	1.0	3.5	13.0	12.9	18.0	1.7	21.0	42.0	28500	250
	3.5	6.0	13.0	12.9	18.0	1.7	24.0	42.0	28500	200
M12	2.0	5.0	16.0	15.9	23.0	2.0	27.0	58.0	48000	50