RS PRO Carbon Steel Flat Head Blind Rivet Nut, M5 x 18.4mm long

Supplier Part Number: RNSFHJK0550



FEATURES

- **Material:** Carbon Steel: Provides excellent strength and durability.
- **Finish:** Clear Trivalent Chromate Zinc: Offers enhanced corrosion resistance.
- **Thread Size:** M5: Ensures compatibility with standard M5 fasteners.
- **Diameter:** 9.9 mm: Suitable for a variety of applications requiring precise fitting.
- **Fixing Hole Diameter:** 10 mm: Allows for easy installation in pre-drilled holes.
- **Length:** 18.4 mm: Provides sufficient grip length for secure fastening.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

The RS PRO M5 Rivet Nut is designed for secure fastening in applications where a strong, reliable connection is required. Made from durable carbon steel, this rivet nut is ideal for use in environments where corrosion resistance and strength are paramount.


General Specifications


Finish	Clear, Trivalent Chromate, Zinc
Material	Carbon Steel
Product Type	Rivet Nut
Sub Type	Nut
Thread Size	M5
Fixing Hole Diameter	10 mm
Head Type	Flat


Mechanical Specifications

Diameter	9.9 mm
Length	18.4 mm
Maximum Grip	5 mm
Minimum Grip	0.1 mm
Shear Strength	2000 N
Tensile Strength	295 N
Maximum Tightening Torque	3 Nm

Technical Diagrams



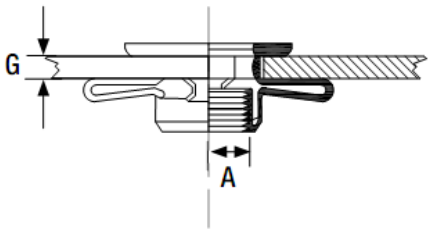



Thread Size mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Body Diameter mm	Flange Diameter mm	Flange Thickness mm	Body Overall Length mm	Max Tightening Torque Nm	Tensile Strength N	Box Quantity
A	G	G		B	H	T	L			
M4	0.1	5.0	8.0	7.9	12.2	1.6	16.8	2.0	245	500
	5.0	10.0	8.0	7.9	12.2	1.6	22.0	2.0	245	500
M5	0.1	5.0	10.0	9.9	14.0	1.6	18.4	2.0	295	250
	5.0	10.0	10.0	9.9	14.0	1.6	23.2	2.0	295	250
M6	0.1	5.0	12.0	11.9	16.0	1.6	18.6	4.2	390	250
	5.0	10.0	12.0	11.9	16.0	2.0	22.9	4.2	390	200
M8	0.1	5.0	15.0	14.9	18.2	2.0	21.0	4.2	490	100
	5.0	10.0	15.0	14.9	18.2	2.0	25.5	4.2	490	100