RS PRO Carbon Steel Flat Head Blind Rivet Nut, M6 x 18.6mm long

Supplier Part Number: RNSFHJK0650



FEATURES

- **Material:** Carbon steel construction ensures high strength and durability.
- **Finish:** Clear trivalent chromate and zinc finish offers excellent corrosion resistance.
- **Thread Size:** M6 thread size for compatibility with a wide range of applications.
- **Diameter:** 11.9 mm diameter for precise fitting.
- **Fixing Hole Diameter:** 12 mm fixing hole diameter for easy installation.
- **Length:** 18.6 mm length for versatile use in different settings.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

The RS PRO M6 Rivet Nut is designed for secure fastening in various industrial applications. Made from durable carbon steel, this rivet nut provides reliable performance and is suitable for use in environments requiring robust and long-lasting connections.


General Specifications


Finish	Clear, Trivalent Chromate, Zinc
Material	Carbon Steel
Product Type	Rivet Nut
Sub Type	Nut
Thread Size	M6
Fixing Hole Diameter	12 mm
Head Type	Flat


Mechanical Specifications

Diameter	11.9 mm
Length	18.6 mm
Maximum Grip	5 mm
Minimum Grip	0.1 mm
Shear Strength	3000 N
Tensile Strength	390 N
Maximum Tightening Torque	3 Nm

Technical Diagrams



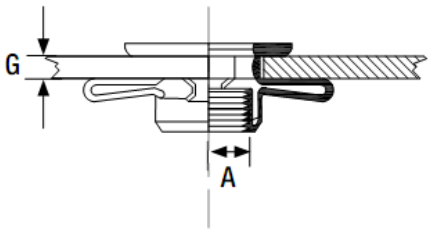



Thread Size mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Body Diameter mm	Flange Diameter mm	Flange Thickness mm	Body Overall Length mm	Max Tightening Torque Nm	Tensile Strength N	Box Quantity
A	G	G		B	H	T	L			
M4	0.1	5.0	8.0	7.9	12.2	1.6	16.8	2.0	245	500
	5.0	10.0	8.0	7.9	12.2	1.6	22.0	2.0	245	500
M5	0.1	5.0	10.0	9.9	14.0	1.6	18.4	2.0	295	250
	5.0	10.0	10.0	9.9	14.0	1.6	23.2	2.0	295	250
M6	0.1	5.0	12.0	11.9	16.0	1.6	18.6	4.2	390	250
	5.0	10.0	12.0	11.9	16.0	2.0	22.9	4.2	390	200
M8	0.1	5.0	15.0	14.9	18.2	2.0	21.0	4.2	490	100
	5.0	10.0	15.0	14.9	18.2	2.0	25.5	4.2	490	100