RS PRO Carbon Steel Flat Head Blind Rivet Nut, M8 x 25.5mm long

Supplier Part Number: RNSFHJK08100



FEATURES

- **Material:** Carbon Steel: Offers high strength and durability for demanding applications.
- **Finish:** Clear Trivalent Chromate Zinc: Provides excellent corrosion resistance for longevity.
- **Thread Size:** M8: Ensures compatibility with standard M8 threaded components.
- **Diameter:** 14.9 mm: Suitable for precise fitting in designated holes.
- **Fixing Hole Diameter:** 15 mm: Allows for easy installation and secure fastening.
- **Length:** 25.5 mm: Provides adequate grip length for various material thicknesses.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

The RS PRO M8 Rivet Nut is designed for secure fastening in various industrial applications. Made from durable carbon steel, this rivet nut provides reliable performance and strength, making it ideal for use in environments where robust fastening is required.


General Specifications


Finish	Clear, Trivalent Chromate, Zinc
Material	Carbon Steel
Product Type	Rivet Nut
Sub Type	Nut
Thread Size	M8
Fixing Hole Diameter	15 mm
Head Type	Flat


Mechanical Specifications

Diameter	14.9 mm
Length	25.5 mm
Maximum Grip	10 mm
Minimum Grip	5 mm
Shear Strength	4400 N
Tensile Strength	490 N
Maximum Tightening Torque	4.2 Nm

Technical Diagrams



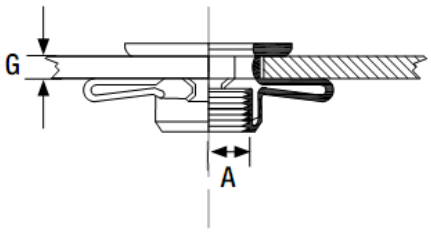



Thread Size mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Body Diameter mm	Flange Diameter mm	Flange Thickness mm	Body Overall Length mm	Max Tightening Torque Nm	Tensile Strength N	Box Quantity
A	G	G		B	H	T	L			
M4	0.1	5.0	8.0	7.9	12.2	1.6	16.8	2.0	245	500
	5.0	10.0	8.0	7.9	12.2	1.6	22.0	2.0	245	500
M5	0.1	5.0	10.0	9.9	14.0	1.6	18.4	2.0	295	250
	5.0	10.0	10.0	9.9	14.0	1.6	23.2	2.0	295	250
M6	0.1	5.0	12.0	11.9	16.0	1.6	18.6	4.2	390	250
	5.0	10.0	12.0	11.9	16.0	2.0	22.9	4.2	390	200
M8	0.1	5.0	15.0	14.9	18.2	2.0	21.0	4.2	490	100
	5.0	10.0	15.0	14.9	18.2	2.0	25.5	4.2	490	100