
RS PRO Carbon Steel Reduced Head Blind Rivet Nut, M5 x 14.5mm long

Supplier Part Number: RNSRHH0530

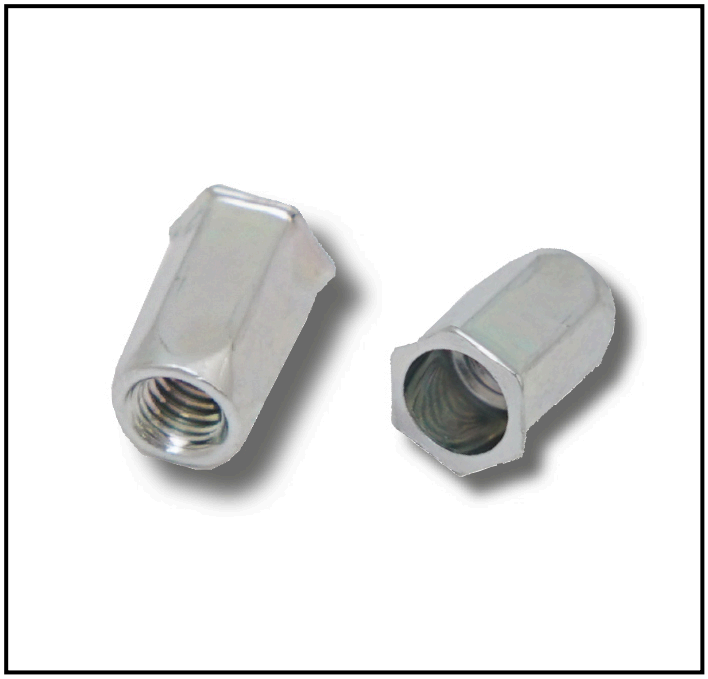

FEATURES

- **Material:** Carbon steel construction ensures strength and durability.
- **Finish:** Clear trivalent chromate and zinc finish offers excellent corrosion resistance.
- **Thread Size:** M5 thread size for compatibility with a wide range of applications.
- **Diameter:** 6.9 mm diameter for precise fitting.
- **Fixing Hole Diameter:** 7 mm fixing hole diameter for easy installation.
- **Length:** 14.5 mm length for optimal grip and stability.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

The RS PRO M5 Rivet Nut is designed for secure fastening in various industrial applications. Made from durable carbon steel, it provides reliable performance and corrosion resistance, making it ideal for use in demanding environments.


General Specifications

Finish	Clear, Trivalent Chromate, Zinc
Material	Carbon Steel
Product Type	Rivet Nut
Sub Type	Nut
Thread Size	M5
Fixing Hole Diameter	7 mm
Head Type	Reduced

Mechanical Specifications

Diameter	6.9 mm
Length	14.5 mm
Maximum Grip	3 mm
Minimum Grip	0.5 mm
Shear Strength	2000 N
Tensile Strength	10000 N
Maximum Tightening Torque	6.5 Nm

Technical Diagrams

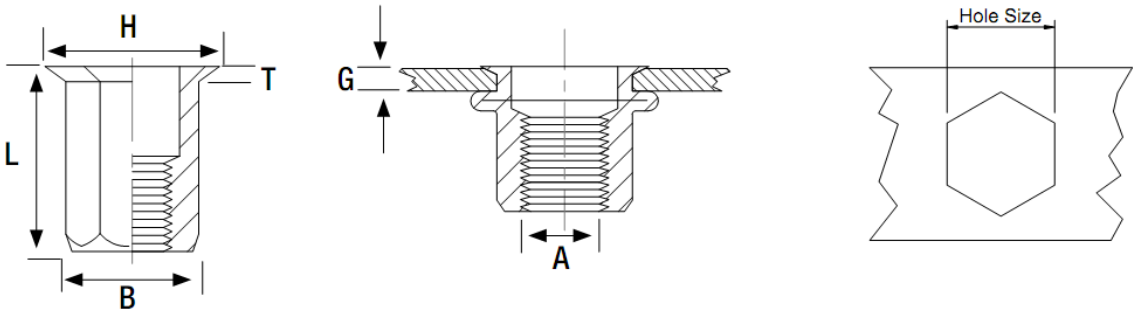

Thread Size mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Body Diameter mm	Flange Diameter mm	Flange Thickness mm	Body Overall Length mm	Max Tightening Torque Nm	Tensile Strength N	Box Quantity
A	G	G		B	H	T	L			
M4	0.5	2.5	6.0	5.9	7.0	0.5	11.0	4.0	6800	1500
	0.5	3.0	6.0	5.9	7.0	0.5	14.5	4.0	6800	1000
M5	3.0	5.0	7.0	6.9	8.0	0.5	16.0	6.5	10000	500
M6	1.0	3.5	9.0	8.9	10.0	0.6	16.0	12.0	15000	500
	3.0	6.0	9.0	8.9	10.0	0.6	18.0	12.0	15000	500
	1.0	4.0	9.0	8.9	10.0	0.6	18.0	12.0	15000	250
	4.0	6.0	9.0	8.9	10.0	0.6	20.0	12.0	15000	250
M10	1.0	3.5	13.0	12.9	14.5	0.8	19.0	42.0	28500	250
	3.5	6.0	13.0	12.9	14.5	0.8	23.5	42.0	28500	250
M12	1.0	4.0	16.0	15.9	17.5	1.0	25.0	58.0	48000	100