
# RS PRO Carbon Steel Reduced Head Blind Rivet Nut, M6 x 16mm long

Supplier Part Number: RNSRHH0635

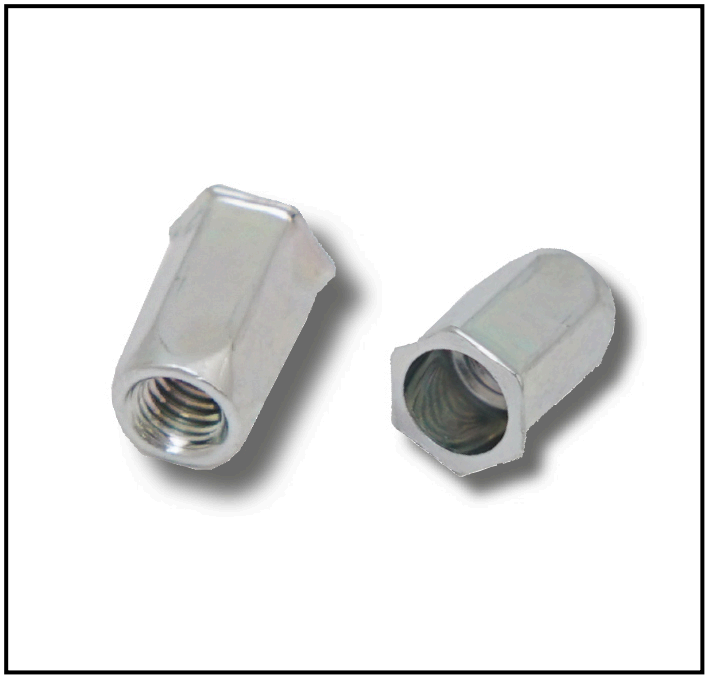

## FEATURES

- **Material:** Carbon steel ensures high strength and durability.
- **Finish:** Clear trivalent chromate zinc finish provides excellent corrosion resistance.
- **Diameter:** 8.9 mm diameter for precise fitting.
- **Fixing Hole Diameter:** 9 mm fixing hole diameter for easy installation.
- **Length:** 16 mm length suitable for a range of applications.
- **Thread Size:** M6 thread size for compatibility with standard fasteners.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

## Product Description

RS PRO offers a reliable M6 rivet nut made from durable carbon steel, designed for secure fastening in various industrial applications. This rivet nut is ideal for creating strong threads in thin materials, providing a robust solution for assembly tasks.


## General Specifications

| | |
|---|---|
| Finish | Clear, Trivalent Chromate, Zinc |
| Material | Carbon Steel |
| Product Type | Rivet Nut |
| Sub Type | Nut |
| Thread Size | M6 |
| Fixing Hole Diameter | 9 mm |
| Head Type | Reduced |

## Mechanical Specifications

| | |
|---|---|
| Diameter | 8.9 mm |
| Length | 16 mm |
| Maximum Grip | 3.5 mm |
| Minimum Grip | 1 mm |
| Shear Strength | 3000 N |
| Tensile Strength | 15000 N |
| Maximum Tightening Torque | 12 Nm |

## Technical Diagrams

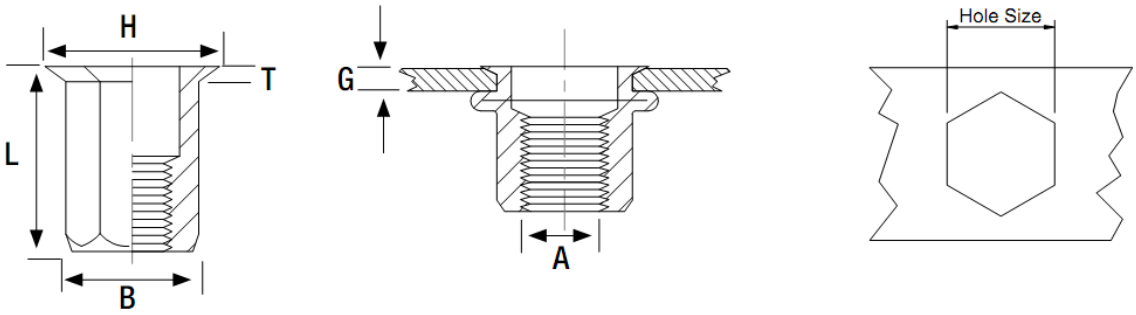


| Thread Size mm | Grip Range Min mm | Grip Range Max mm | Hole Size mm | Body Diameter mm | Flange Diameter mm | Flange Thickness mm | Body Overall Length mm | Max Tightening Torque Nm | Tensile Strength N | Box Quantity |
|---|---|---|---|---|---|---|---|---|---|---|
| A | G | G | | B | H | T | L | | | |
| **M4** | 0.5 | 2.5 | 6.0 | 5.9 | 7.0 | 0.5 | 11.0 | 4.0 | 6800 | 1500 |
| | 0.5 | 3.0 | 6.0 | 5.9 | 7.0 | 0.5 | 14.5 | 4.0 | 6800 | 1000 |
| M5 | 3.0 | 5.0 | 7.0 | 6.9 | 8.0 | 0.5 | 16.0 | 6.5 | 10000 | 500 |
| **M6** | 1.0 | 3.5 | 9.0 | 8.9 | 10.0 | 0.6 | 16.0 | 12.0 | 15000 | 500 |
| | 3.0 | 6.0 | 9.0 | 8.9 | 10.0 | 0.6 | 18.0 | 12.0 | 15000 | 500 |
| | 1.0 | 4.0 | 9.0 | 8.9 | 10.0 | 0.6 | 18.0 | 12.0 | 15000 | 250 |
| | 4.0 | 6.0 | 9.0 | 8.9 | 10.0 | 0.6 | 20.0 | 12.0 | 15000 | 250 |
| **M10** | 1.0 | 3.5 | 13.0 | 12.9 | 14.5 | 0.8 | 19.0 | 42.0 | 28500 | 250 |
| | 3.5 | 6.0 | 13.0 | 12.9 | 14.5 | 0.8 | 23.5 | 42.0 | 28500 | 250 |
| M12 | 1.0 | 4.0 | 16.0 | 15.9 | 17.5 | 1.0 | 25.0 | 58.0 | 48000 | 100 |