
RS PRO Carbon Steel Reduced Head Blind Rivet Nut, M8 x 18mm long

Supplier Part Number: RNSRHH0840

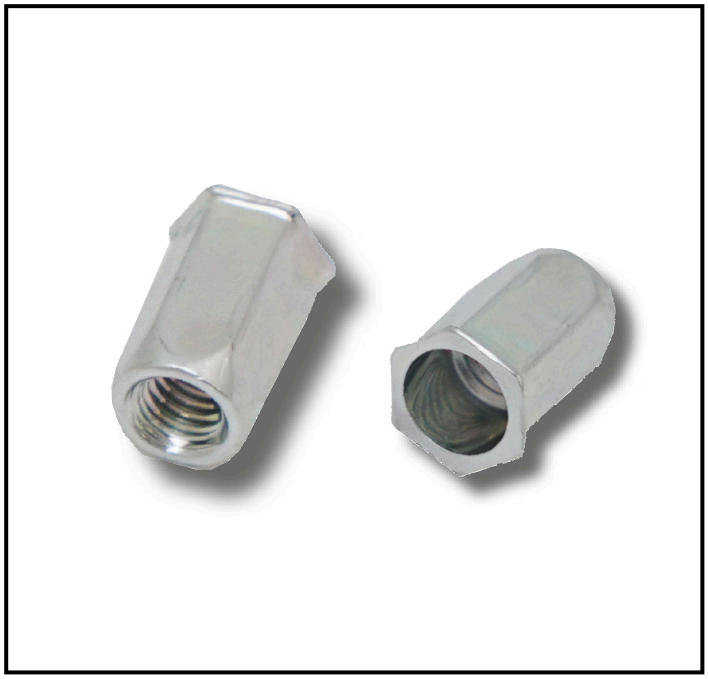

FEATURES

- **Material:** Carbon steel construction ensures high strength and durability.
- **Finish:** Zinc with trivalent chromate provides excellent corrosion resistance.
- **Thread Size:** M8 thread size for compatibility with standard fasteners.
- **Diameter:** 10.9 mm diameter for a secure fit.
- **Fixing Hole Diameter:** 11 mm for easy installation.
- **Length:** 18 mm length for versatile use in various applications.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

The RS PRO M8 Rivet Nut is designed for secure fastening in a variety of applications. Made from durable carbon steel, this rivet nut provides a reliable solution for creating strong threads in thin materials. Its zinc finish with trivalent chromate offers enhanced corrosion resistance, making it suitable for demanding environments.


General Specifications

Finish	Clear, Trivalent Chromate, Zinc
Material	Carbon Steel
Product Type	Rivet Nut
Sub Type	Nut
Thread Size	M8
Fixing Hole Diameter	11 mm
Head Type	Reduced

Mechanical Specifications

Diameter	10.9 mm
Length	18 mm
Maximum Grip	4 mm
Minimum Grip	1 mm
Shear Strength	4400 N
Tensile Strength	27000 N
Maximum Tightening Torque	31 Nm

Technical Diagrams

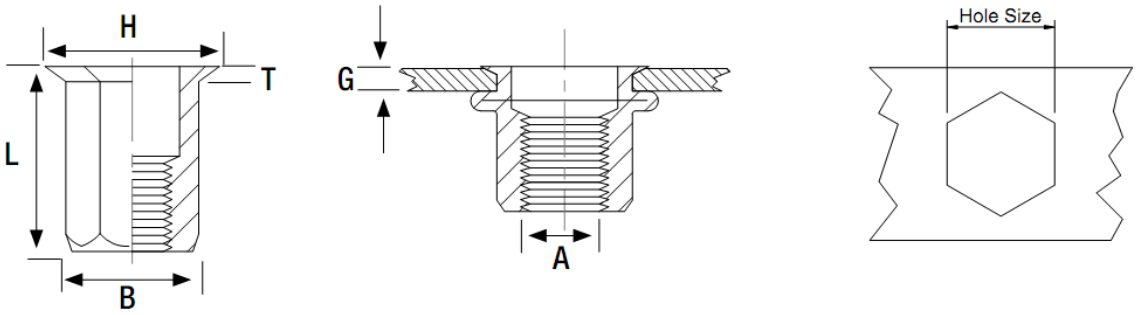

Thread Size mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Body Diameter mm	Flange Diameter mm	Flange Thickness mm	Body Overall Length mm	Max Tightening Torque Nm	Tensile Strength N	Box Quantity
A	G	G		B	H	T	L			
M4	0.5	2.5	6.0	5.9	7.0	0.5	11.0	4.0	6800	1500
	0.5	3.0	6.0	5.9	7.0	0.5	14.5	4.0	6800	1000
M5	3.0	5.0	7.0	6.9	8.0	0.5	16.0	6.5	10000	500
M6	1.0	3.5	9.0	8.9	10.0	0.6	16.0	12.0	15000	500
	3.0	6.0	9.0	8.9	10.0	0.6	18.0	12.0	15000	500
	1.0	4.0	9.0	8.9	10.0	0.6	18.0	12.0	15000	250
	4.0	6.0	9.0	8.9	10.0	0.6	20.0	12.0	15000	250
M10	1.0	3.5	13.0	12.9	14.5	0.8	19.0	42.0	28500	250
	3.5	6.0	13.0	12.9	14.5	0.8	23.5	42.0	28500	250
M12	1.0	4.0	16.0	15.9	17.5	1.0	25.0	58.0	48000	100