
RS PRO Carbon Steel Reduced Head Blind Rivet Nut, M8 x 20mm long

Supplier Part Number: RNSRHH0860

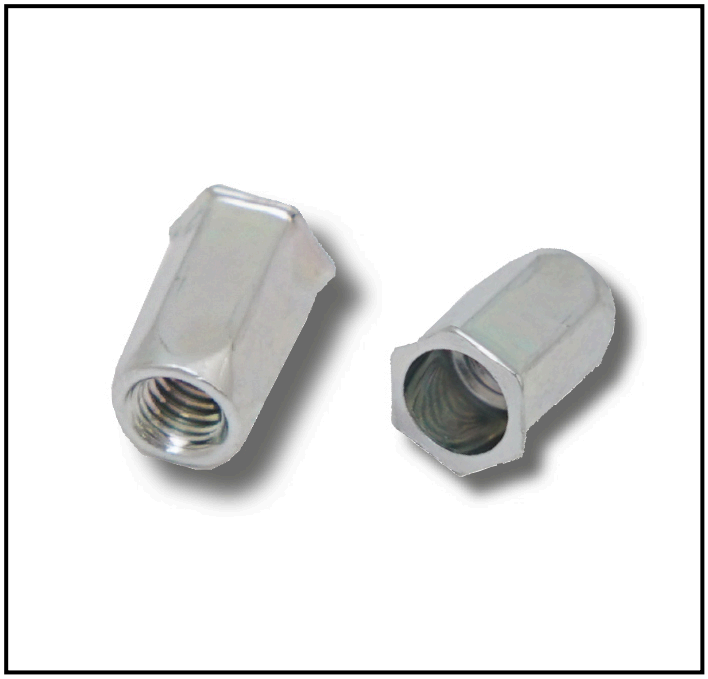

FEATURES

- **Material:** Carbon Steel: Ensures durability and strength for long-lasting use.
- **Finish:** Clear Trivalent Chromate Zinc: Provides excellent corrosion resistance.
- **Thread Size:** M8: Compatible with standard M8 bolts and screws.
- **Diameter:** 10.9 mm: Suitable for precise fitting in pre-drilled holes.
- **Fixing Hole Diameter:** 11 mm: Allows for easy installation and secure fastening.
- **Length:** 20 mm: Offers sufficient grip length for various applications.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

RS PRO offers a high-quality M8 rivet nut designed for secure fastening in various industrial applications. Made from durable carbon steel, this rivet nut provides reliable performance and is ideal for use in environments where strength and corrosion resistance are essential.


General Specifications

Finish	Clear, Trivalent Chromate, Zinc
Material	Carbon Steel
Product Type	Rivet Nut
Sub Type	Nut
Thread Size	M8
Fixing Hole Diameter	11 mm
Head Type	Reduced

Mechanical Specifications

Diameter	10.9 mm
Length	20 mm
Maximum Grip	6 mm
Minimum Grip	4 mm
Shear Strength	4400 N
Tensile Strength	27000 N
Maximum Tightening Torque	31 Nm

Technical Diagrams

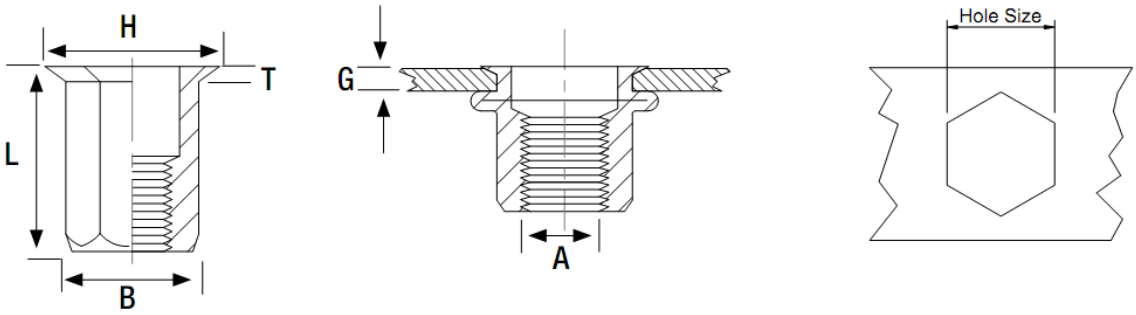

Thread Size mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Body Diameter mm	Flange Diameter mm	Flange Thickness mm	Body Overall Length mm	Max Tightening Torque Nm	Tensile Strength N	Box Quantity
A	G	G		B	H	T	L			
M4	0.5	2.5	6.0	5.9	7.0	0.5	11.0	4.0	6800	1500
	0.5	3.0	6.0	5.9	7.0	0.5	14.5	4.0	6800	1000
M5	3.0	5.0	7.0	6.9	8.0	0.5	16.0	6.5	10000	500
M6	1.0	3.5	9.0	8.9	10.0	0.6	16.0	12.0	15000	500
	3.0	6.0	9.0	8.9	10.0	0.6	18.0	12.0	15000	500
	1.0	4.0	9.0	8.9	10.0	0.6	18.0	12.0	15000	250
	4.0	6.0	9.0	8.9	10.0	0.6	20.0	12.0	15000	250
M10	1.0	3.5	13.0	12.9	14.5	0.8	19.0	42.0	28500	250
	3.5	6.0	13.0	12.9	14.5	0.8	23.5	42.0	28500	250
M12	1.0	4.0	16.0	15.9	17.5	1.0	25.0	58.0	48000	100