
RS PRO Carbon Steel Reduced Head Blind Rivet Nut, M10 x 19mm long

Supplier Part Number: RNSRHH1035

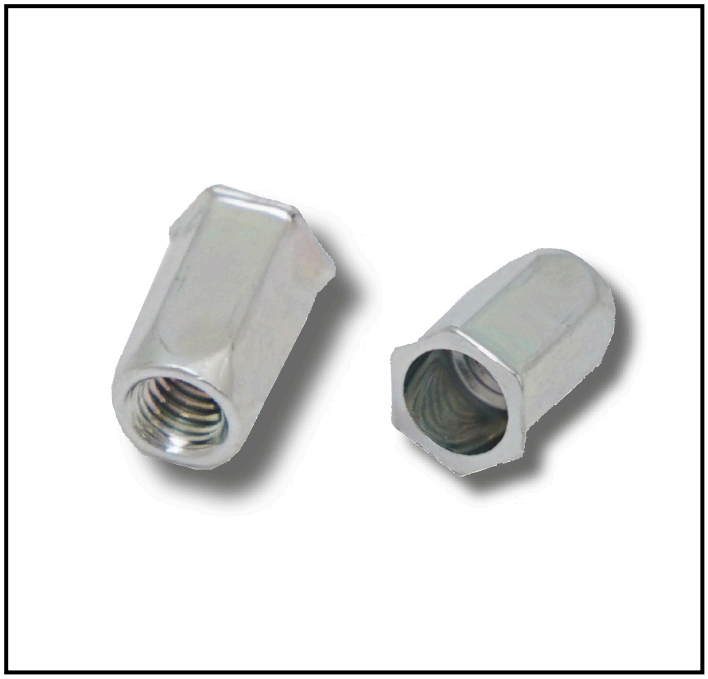

FEATURES

- **Material:** Carbon Steel provides high strength and durability.
- **Finish:** Clear Trivalent Chromate Zinc finish offers excellent corrosion resistance.
- **Diameter:** 12.9 mm diameter ensures compatibility with standard applications.
- **Fixing Hole Diameter:** 13 mm for easy installation.
- **Thread Size:** M10 thread size for versatile use in various assemblies.
- **Length:** 19 mm length for optimal grip range.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

RS PRO offers a robust M10 Carbon Steel Rivet Nut designed for secure fastening in various industrial applications. This rivet nut is ideal for providing a strong threaded connection in thin materials, ensuring reliability and durability in demanding environments.


General Specifications

Finish	Clear, Trivalent Chromate, Zinc
Material	Carbon Steel
Product Type	Rivet Nut
Sub Type	Nut
Thread Size	M10
Fixing Hole Diameter	13 mm
Head Type	Reduced

Mechanical Specifications

Diameter	12.9 mm
Length	19 mm
Maximum Grip	3.5 mm
Minimum Grip	1 mm
Shear Strength	5000 N
Tensile Strength	28500 N
Maximum Tightening Torque	42 Nm

Technical Diagrams

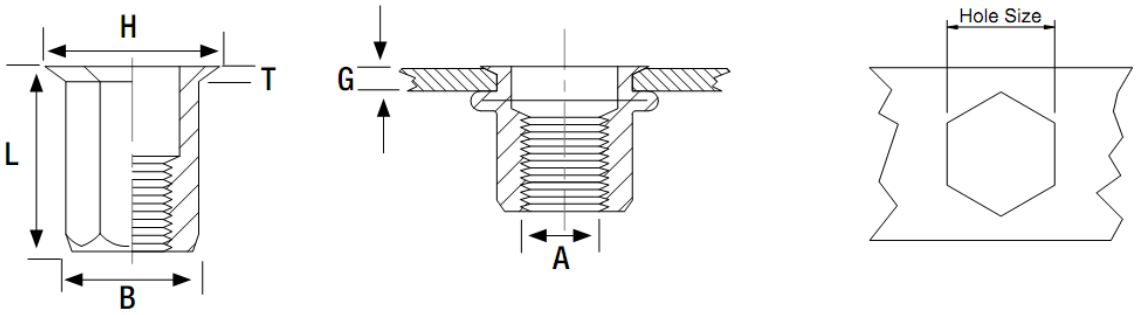

Thread Size mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Body Diameter mm	Flange Diameter mm	Flange Thickness mm	Body Overall Length mm	Max Tightening Torque Nm	Tensile Strength N	Box Quantity
A	G	G		B	H	T	L			
M4	0.5	2.5	6.0	5.9	7.0	0.5	11.0	4.0	6800	1500
	0.5	3.0	6.0	5.9	7.0	0.5	14.5	4.0	6800	1000
M5	3.0	5.0	7.0	6.9	8.0	0.5	16.0	6.5	10000	500
M6	1.0	3.5	9.0	8.9	10.0	0.6	16.0	12.0	15000	500
	3.0	6.0	9.0	8.9	10.0	0.6	18.0	12.0	15000	500
	1.0	4.0	9.0	8.9	10.0	0.6	18.0	12.0	15000	250
	4.0	6.0	9.0	8.9	10.0	0.6	20.0	12.0	15000	250
M10	1.0	3.5	13.0	12.9	14.5	0.8	19.0	42.0	28500	250
	3.5	6.0	13.0	12.9	14.5	0.8	23.5	42.0	28500	250
M12	1.0	4.0	16.0	15.9	17.5	1.0	25.0	58.0	48000	100