
RS PRO Carbon Steel Reduced Head Blind Rivet Nut, M10 x 23.5mm long

Supplier Part Number: RNSRHH1060

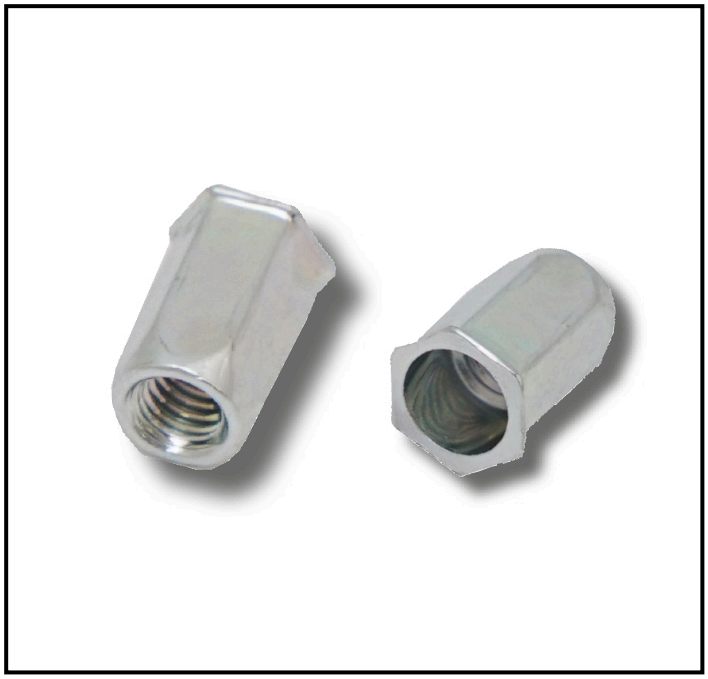

FEATURES

- **Material:** Carbon Steel for enhanced strength and durability
- **Finish:** Clear Trivalent Chromate Zinc for corrosion resistance
- **Diameter:** 12.9 mm for precise fitting
- **Fixing Hole Diameter:** 13 mm for easy installation
- **Length:** 23.5 mm for optimal grip range
- **Thread Size:** M10 for compatibility with standard fasteners

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

RS PRO M10 Rivet Nut is designed for secure fastening in various industrial applications. Made from durable carbon steel, it offers reliable performance and is ideal for use in environments requiring robust and long-lasting connections.


General Specifications

Finish	Clear, Trivalent Chromate, Zinc
Material	Carbon Steel
Product Type	Rivet Nut
Sub Type	Nut
Thread Size	M10
Fixing Hole Diameter	13 mm
Head Type	Reduced

Mechanical Specifications

Diameter	12.9 mm
Length	23.5 mm
Maximum Grip	6 mm
Minimum Grip	3.5 mm
Shear Strength	5000 N
Tensile Strength	28500 N
Maximum Tightening Torque	42 Nm

Technical Diagrams

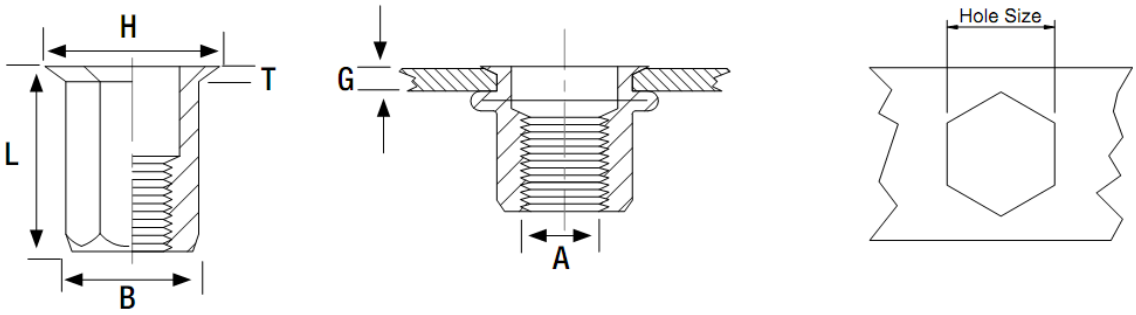

Thread Size mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Body Diameter mm	Flange Diameter mm	Flange Thickness mm	Body Overall Length mm	Max Tightening Torque Nm	Tensile Strength N	Box Quantity
A	G	G		B	H	T	L			
M4	0.5	2.5	6.0	5.9	7.0	0.5	11.0	4.0	6800	1500
	0.5	3.0	6.0	5.9	7.0	0.5	14.5	4.0	6800	1000
M5	3.0	5.0	7.0	6.9	8.0	0.5	16.0	6.5	10000	500
M6	1.0	3.5	9.0	8.9	10.0	0.6	16.0	12.0	15000	500
	3.0	6.0	9.0	8.9	10.0	0.6	18.0	12.0	15000	500
	1.0	4.0	9.0	8.9	10.0	0.6	18.0	12.0	15000	250
	4.0	6.0	9.0	8.9	10.0	0.6	20.0	12.0	15000	250
M10	1.0	3.5	13.0	12.9	14.5	0.8	19.0	42.0	28500	250
	3.5	6.0	13.0	12.9	14.5	0.8	23.5	42.0	28500	250
M12	1.0	4.0	16.0	15.9	17.5	1.0	25.0	58.0	48000	100