
RS PRO Carbon Steel Reduced Head Blind Rivet Nut, M12 x 25mm long

Supplier Part Number: RNSRHH1240

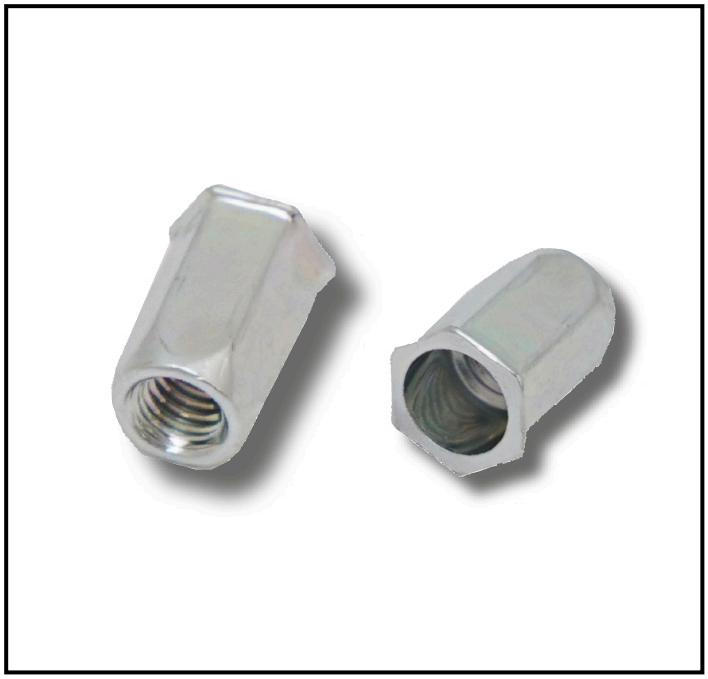

FEATURES

- **Material:** Carbon steel offers high strength and durability.
- **Finish:** Clear trivalent chromate zinc finish provides excellent corrosion resistance.
- **Thread Size:** M12 thread size ensures compatibility with a wide range of bolts and screws.
- **Fixing Hole Diameter:** 16 mm fixing hole diameter allows for easy installation.
- **Length:** 25 mm length accommodates various material thicknesses.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

The RS PRO M12 Carbon Steel Rivet Nut is designed for secure fastening in various industrial applications. Made from durable carbon steel, this rivet nut provides a reliable solution for creating strong threads in thin materials. Its clear trivalent chromate zinc finish enhances corrosion resistance, making it suitable for demanding environments.


General Specifications

Finish	Clear, Trivalent Chromate, Zinc
Material	Carbon Steel
Product Type	Rivet Nut
Sub Type	Nut
Thread Size	M12
Fixing Hole Diameter	16 mm
Head Type	Reduced

Mechanical Specifications

Diameter	15.9 mm
Length	25 mm
Maximum Grip	4 mm
Minimum Grip	1 mm
Shear Strength	6500 N
Tensile Strength	48000 N
Maximum Tightening Torque	58 Nm

Technical Diagrams

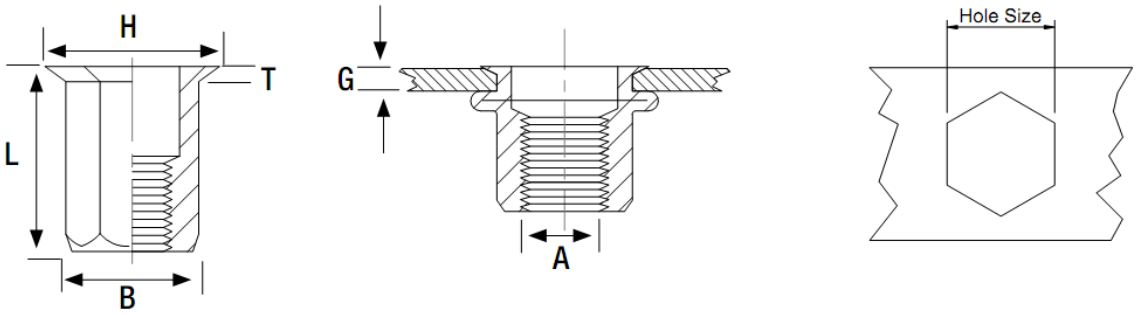

Thread Size mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Body Diameter mm	Flange Diameter mm	Flange Thickness mm	Body Overall Length mm	Max Tightening Torque Nm	Tensile Strength N	Box Quantity
A	G	G		B	H	T	L			
M4	0.5	2.5	6.0	5.9	7.0	0.5	11.0	4.0	6800	1500
	0.5	3.0	6.0	5.9	7.0	0.5	14.5	4.0	6800	1000
M5	3.0	5.0	7.0	6.9	8.0	0.5	16.0	6.5	10000	500
M6	1.0	3.5	9.0	8.9	10.0	0.6	16.0	12.0	15000	500
	3.0	6.0	9.0	8.9	10.0	0.6	18.0	12.0	15000	500
	1.0	4.0	9.0	8.9	10.0	0.6	18.0	12.0	15000	250
	4.0	6.0	9.0	8.9	10.0	0.6	20.0	12.0	15000	250
M10	1.0	3.5	13.0	12.9	14.5	0.8	19.0	42.0	28500	250
	3.5	6.0	13.0	12.9	14.5	0.8	23.5	42.0	28500	250
M12	1.0	4.0	16.0	15.9	17.5	1.0	25.0	58.0	48000	100