RS PRO Carbon Steel Reduced Head Blind Rivet Nut, M5 x 12mm long

Supplier Part Number: RNSRHUS0533



FEATURES

- **Material:** Carbon steel construction ensures strength and durability.
- **Finish:** Clear trivalent chromate zinc finish provides corrosion resistance.
- **Thread Size:** M5 thread size for compatibility with standard fasteners.
- **Diameter:** 7.5 mm diameter for precise fitting.
- **Fixing Hole Diameter:** 7.6 mm fixing hole diameter for easy installation.
- **Length:** 12 mm length suitable for a range of applications.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

RS PRO offers a high-quality M5 rivet nut designed for secure fastening in various industrial applications. Made from durable carbon steel, this rivet nut provides reliable performance and longevity. Ideal for use where a strong, permanent thread is required in thin materials.


General Specifications


Finish	Clear, Trivalent Chromate, Zinc
Material	Carbon Steel
Product Type	Rivet Nut
Sub Type	Nut
Thread Size	M5
Fixing Hole Diameter	7.6 mm
Head Type	Reduced


Mechanical Specifications

Diameter	7.5 mm
Length	12 mm
Maximum Grip	3.3 mm
Minimum Grip	0.5 mm
Shear Strength	2000 N
Tensile Strength	10000 N
Maximum Tightening Torque	6 Nm

Technical Diagrams



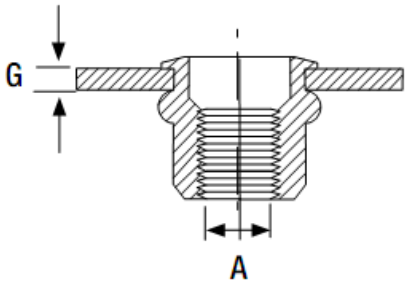



Thread Size mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Body Diameter mm	Flange Diameter mm	Flange Thickness mm	Body Overall Length mm	Max Tightening Torque Nm	Tensile Strength N	Box Quantity
A	G	G		B	H	T	L			
M4	0.5	2.0	6.75	6.7	7.9	0.6	10.7	3.0	6000	1000
	2.0	3.3	6.75	6.7	7.9	0.6	11.9	3.0	6000	1000
M5	0.5	3.3	7.6	7.5	8.7	0.6	12.0	6.0	10000	1000
	3.3	5.7	7.6	7.5	8.7	0.6	14.9	6.0	10000	500
M6	0.7	4.2	10.0	9.9	11.6	0.6	14.7	10.0	15000	500
	4.2	6.6	10.0	9.9	11.6	0.6	17.3	10.0	15000	500
M8	0.7	3.8	10.0	9.9	11.6	0.6	17.5	24.0	27000	250
	3.8	7.9	13.5	13.4	15.1	0.6	20.5	24.0	27000	250
M10	0.7	3.8	13.5	13.4	15.1	0.6	17.5	32.0	28500	200
	3.8	7.9	13.5	13.4	15.1	0.6	20.5	32.0	28500	200