RS PRO A4/316 Stainless Steel Countersunk Head Blind Rivet Nut, M6 x 15.5mm long

Supplier Part Number: RNSS4CH0640



FEATURES

- **Material:** A4/316 stainless steel provides superior corrosion resistance.
- **Thread Size:** M6 thread size ensures compatibility with standard fasteners.
- **Diameter:** 8.9 mm diameter allows for easy installation in pre-drilled holes.
- **Fixing Hole Diameter:** 9 mm fixing hole diameter for secure fitting.
- **Length:** 15.5 mm length provides a stable and robust connection.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

The RS PRO M6 Rivet Nut is designed for secure fastening in various industrial applications. Made from A4/316 stainless steel, it offers excellent corrosion resistance, making it ideal for harsh environments. This rivet nut is suitable for use in applications where a strong, reliable thread is needed in thin materials.


General Specifications


Material	A4/316 Stainless Steel
Product Type	Rivet Nut
Sub Type	Nut
Thread Size	M6
Fixing Hole Diameter	9 mm
Head Type	Countersunk


Mechanical Specifications

Diameter	8.9 mm
Length	15.5 mm
Maximum Grip	2.5 mm
Minimum Grip	0.5 mm
Shear Strength	3000 N
Tensile Strength	15000 N
Maximum Tightening Torque	10 Nm

Technical Diagrams

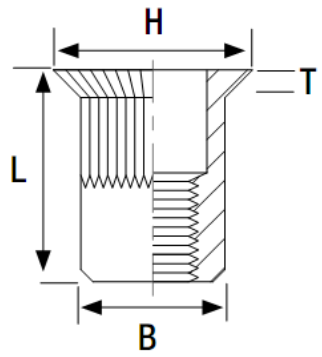

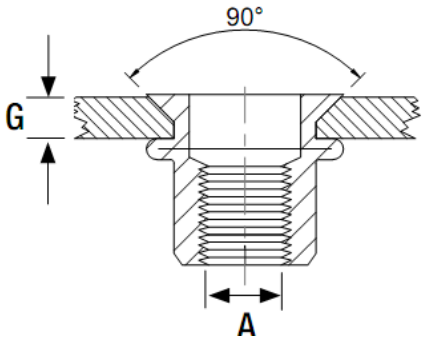



Thread Size mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Body Diameter mm	Flange Diameter mm	Flange Thickness mm	Body Overall Length mm	Max Tightening Torque Nm	Tensile Strength N	Box Quantity
A	G	G		B	H	T	L			
M3	0.5	1.5	5.0	4.9	7.5	1.5	8.5	1.0	3900	2000
M4	0.5	2.0	6.0	5.9	9.0	1.5	12.0	3.0	6800	1500
M5	0.5	2.0	7.0	6.9	10.0	1.5	13.0	6.0	10000	1000
M6	0.5	2.5	9.0	8.9	12.0	1.5	15.5	10.0	15000	500
M8	0.5	3.0	11.0	10.9	14.0	1.5	18.5	24.0	27000	300
M10	1.0	3.5	13.0	12.9	16.0	1.7	21.0	32.0	28500	150