RS PRO A2/304 Stainless Steel Countersunk Head Blind Rivet Nut, M5 x 13mm long

Supplier Part Number: RNSSCH0535



FEATURES

- **Material:** A2/304 stainless steel provides high corrosion resistance and durability.
- **Diameter:** 6.9 mm diameter ensures compatibility with a range of applications.
- **Thread Size:** M5 thread size for standardised fastening solutions.
- **Fixing Hole Diameter:** 7 mm fixing hole diameter for easy installation.
- **Length:** 13 mm length suitable for various material thicknesses.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

The RS PRO M5 Rivet Nut is designed for secure fastening in various industrial applications. Made from A2/304 stainless steel, it offers excellent corrosion resistance and durability, making it ideal for use in harsh environments. The rivet nut provides a reliable threaded solution for materials where only one side is accessible.


General Specifications


Material	A2/304 Stainless Steel
Product Type	Rivet Nut
Sub Type	Nut
Thread Size	M5
Fixing Hole Diameter	7 mm
Head Type	Countersunk


Mechanical Specifications

Diameter	6.9 mm
Length	13 mm
Maximum Grip	3.5 mm
Minimum Grip	1.5 mm
Shear Strength	2000 N
Tensile Strength	10000 N
Maximum Tightening Torque	6 Nm

Technical Diagrams



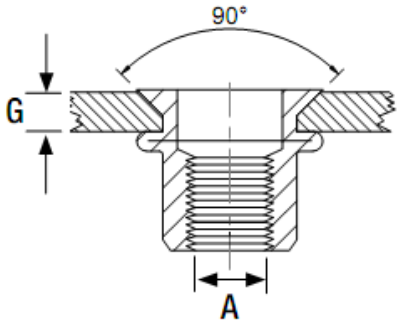



Thread Size mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Body Diameter mm	Flange Diameter mm	Flange Thickness mm	Body Overall Length mm	Max Tightening Torque Nm	Tensile Strength N	Box Quantity
A	G	G		B	H	T	L			
M3	1.6	3.0	5.0	4.9	7.5	1.5	8.5	1.0	3900	2000
	1.5	3.0	5.0	4.9	7.5	1.5	12.0	1.0	3900	1000
M4	3.0	4.5	6.0	5.9	9.0	1.5	13.0	3.0	6800	1500
M5	1.5	3.5	7.0	6.9	10.0	1.5	13.0	6.0	10000	500
	3.5	5.0	7.0	6.9	10.0	1.5	15.0	6.0	10000	500
M6	1.5	4.0	9.0	8.9	12.0	1.5	15.5	10.0	15000	500
	4.0	6.0	9.0	8.9	12.0	1.5	17.0	10.0	15000	400
M8	2.0	4.5	11.0	10.9	14.0	1.7	18.5	24.0	27000	250
	4.5	6.0	11.0	10.9	14.0	1.7	19.0	24.0	27000	250
M10	2.0	5.0	13.0	12.9	16.0	1.7	21.0	32.0	28500	250
	5.0	6.5	13.0	12.9	16.0	1.7	24.0	32.0	28500	100
M12	1.7	5.0	16.0	15.9	18.0	1.8	24.0	44.0	48000	100
	4.5	7.5	16.0	15.9	18.0	1.8	27.5	44.0	48000	100