RS PRO A2/304 Stainless Steel Countersunk Head Blind Rivet Nut, M6 x 15.5mm long

Supplier Part Number: RNSSCH0640



FEATURES

- **Material:** A2/304 stainless steel provides superior corrosion resistance.
- **Diameter:** 8.9 mm size ensures compatibility with a range of applications.
- **Fixing Hole Diameter:** 9 mm for easy installation and secure fit.
- **Length:** 15.5 mm length suitable for various thicknesses.
- **Thread Size:** M6 thread size for standardised fastening.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

The RS PRO M6 Rivet Nut is designed for secure fastening in a variety of materials, providing a reliable and durable solution for industrial applications. Made from A2/304 stainless steel, it offers excellent corrosion resistance, making it ideal for use in harsh environments.


General Specifications


Material	A2/304 Stainless Steel
Product Type	Rivet Nut
Sub Type	Nut
Thread Size	M6
Fixing Hole Diameter	9 mm
Head Type	Countersunk


Mechanical Specifications

Diameter	8.9 mm
Length	15.5 mm
Maximum Grip	4 mm
Minimum Grip	1.5 mm
Shear Strength	3000 N
Tensile Strength	15000 N
Maximum Tightening Torque	10 Nm

Technical Diagrams



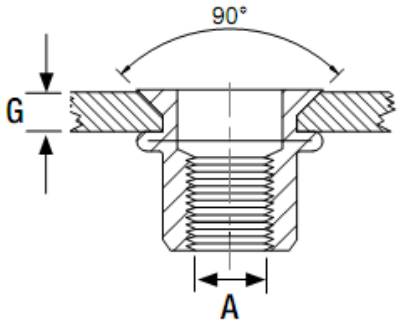



Thread Size mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Body Diameter mm	Flange Diameter mm	Flange Thickness mm	Body Overall Length mm	Max Tightening Torque Nm	Tensile Strength N	Box Quantity
A	G	G		B	H	T	L			
M3	1.6	3.0	5.0	4.9	7.5	1.5	8.5	1.0	3900	2000
	1.5	3.0	5.0	4.9	7.5	1.5	12.0	1.0	3900	1000
M4	3.0	4.5	6.0	5.9	9.0	1.5	13.0	3.0	6800	1500
M5	1.5	3.5	7.0	6.9	10.0	1.5	13.0	6.0	10000	500
	3.5	5.0	7.0	6.9	10.0	1.5	15.0	6.0	10000	500
M6	1.5	4.0	9.0	8.9	12.0	1.5	15.5	10.0	15000	500
	4.0	6.0	9.0	8.9	12.0	1.5	17.0	10.0	15000	400
M8	2.0	4.5	11.0	10.9	14.0	1.7	18.5	24.0	27000	250
	4.5	6.0	11.0	10.9	14.0	1.7	19.0	24.0	27000	250
M10	2.0	5.0	13.0	12.9	16.0	1.7	21.0	32.0	28500	250
	5.0	6.5	13.0	12.9	16.0	1.7	24.0	32.0	28500	100
M12	1.7	5.0	16.0	15.9	18.0	1.8	24.0	44.0	48000	100
	4.5	7.5	16.0	15.9	18.0	1.8	27.5	44.0	48000	100