RS PRO A2/304 Stainless Steel Countersunk Head Blind Rivet Nut, M8 x 19mm long

Supplier Part Number: RNSSCH0860



FEATURES

- **Material:** A2/304 stainless steel ensures high corrosion resistance and durability.
- **Diameter:** 10.9 mm diameter for a precise fit in compatible applications.
- **Thread Size:** M8 thread size for compatibility with standard fasteners.
- **Fixing Hole Diameter:** 11 mm fixing hole diameter for easy installation.
- **Length:** 19 mm length provides a secure hold in various materials.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

RS PRO offers a high-quality M8 rivet nut designed for secure fastening in a variety of applications. Made from A2/304 stainless steel, this rivet nut provides excellent corrosion resistance and durability, making it ideal for use in demanding environments.


General Specifications


Material	A2/304 Stainless Steel
Product Type	Rivet Nut
Sub Type	Nut
Thread Size	M8
Fixing Hole Diameter	11 mm
Head Type	Countersunk


Mechanical Specifications

Diameter	10.9 mm
Length	19 mm
Maximum Grip	6 mm
Minimum Grip	4.5 mm
Shear Strength	4400 N
Tensile Strength	27000 N
Maximum Tightening Torque	24 Nm

Technical Diagrams



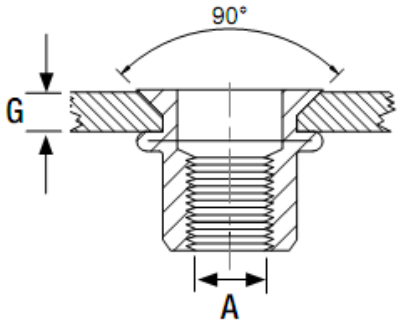



Thread Size mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Body Diameter mm	Flange Diameter mm	Flange Thickness mm	Body Overall Length mm	Max Tightening Torque Nm	Tensile Strength N	Box Quantity
A	G	G		B	H	T	L			
M3	1.6	3.0	5.0	4.9	7.5	1.5	8.5	1.0	3900	2000
	1.5	3.0	5.0	4.9	7.5	1.5	12.0	1.0	3900	1000
M4	3.0	4.5	6.0	5.9	9.0	1.5	13.0	3.0	6800	1500
M5	1.5	3.5	7.0	6.9	10.0	1.5	13.0	6.0	10000	500
	3.5	5.0	7.0	6.9	10.0	1.5	15.0	6.0	10000	500
M6	1.5	4.0	9.0	8.9	12.0	1.5	15.5	10.0	15000	500
	4.0	6.0	9.0	8.9	12.0	1.5	17.0	10.0	15000	400
M8	2.0	4.5	11.0	10.9	14.0	1.7	18.5	24.0	27000	250
	4.5	6.0	11.0	10.9	14.0	1.7	19.0	24.0	27000	250
M10	2.0	5.0	13.0	12.9	16.0	1.7	21.0	32.0	28500	250
	5.0	6.5	13.0	12.9	16.0	1.7	24.0	32.0	28500	100
M12	1.7	5.0	16.0	15.9	18.0	1.8	24.0	44.0	48000	100
	4.5	7.5	16.0	15.9	18.0	1.8	27.5	44.0	48000	100