RS PRO A2/304 Stainless Steel Countersunk Head Blind Rivet Nut, M10 x 24mm long

Supplier Part Number: RNSSCH1060



FEATURES

- **Material:** A2/304 stainless steel provides superior corrosion resistance.
- **Thread Size:** M10 thread size for compatibility with a wide range of bolts.
- **Length:** 24 mm length for enhanced grip and stability.
- **Diameter:** 12.9 mm diameter for a secure fit.
- **Fixing Hole Diameter:** 13 mm for easy installation.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

RS PRO offers a high-quality M10 rivet nut designed for secure fastening in various industrial applications. Made from A2/304 stainless steel, this rivet nut provides excellent corrosion resistance and durability, making it ideal for use in harsh environments. Its 24 mm length and 12.9 mm diameter ensure a robust and reliable connection.


General Specifications


Material	A2/304 Stainless Steel
Product Type	Rivet Nut
Sub Type	Nut
Thread Size	M10
Fixing Hole Diameter	13 mm
Head Type	Countersunk


Mechanical Specifications

Diameter	12.9 mm
Length	24 mm
Maximum Grip	6.5 mm
Minimum Grip	5 mm
Shear Strength	5000 N
Tensile Strength	28500 N
Maximum Tightening Torque	32 Nm

Technical Diagrams



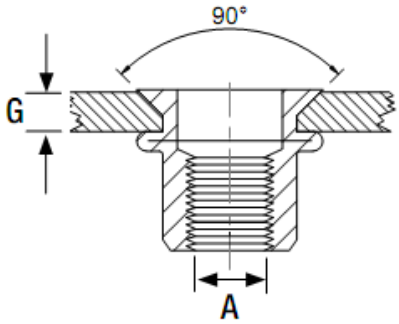



Thread Size mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Body Diameter mm	Flange Diameter mm	Flange Thickness mm	Body Overall Length mm	Max Tightening Torque Nm	Tensile Strength N	Box Quantity
A	G	G		B	H	T	L			
M3	1.6	3.0	5.0	4.9	7.5	1.5	8.5	1.0	3900	2000
	1.5	3.0	5.0	4.9	7.5	1.5	12.0	1.0	3900	1000
M4	3.0	4.5	6.0	5.9	9.0	1.5	13.0	3.0	6800	1500
M5	1.5	3.5	7.0	6.9	10.0	1.5	13.0	6.0	10000	500
	3.5	5.0	7.0	6.9	10.0	1.5	15.0	6.0	10000	500
M6	1.5	4.0	9.0	8.9	12.0	1.5	15.5	10.0	15000	500
	4.0	6.0	9.0	8.9	12.0	1.5	17.0	10.0	15000	400
M8	2.0	4.5	11.0	10.9	14.0	1.7	18.5	24.0	27000	250
	4.5	6.0	11.0	10.9	14.0	1.7	19.0	24.0	27000	250
M10	2.0	5.0	13.0	12.9	16.0	1.7	21.0	32.0	28500	250
	5.0	6.5	13.0	12.9	16.0	1.7	24.0	32.0	28500	100
M12	1.7	5.0	16.0	15.9	18.0	1.8	24.0	44.0	48000	100
	4.5	7.5	16.0	15.9	18.0	1.8	27.5	44.0	48000	100