# RS PRO A2/304 Stainless Steel Countersunk Head Blind Rivet Nut, M12 x 24mm long

Supplier Part Number: RNSSCH1250



## FEATURES

- **Material:** A2/304 stainless steel ensures durability and corrosion resistance.
- **Diameter:** 15.9 mm diameter for precise fitting and secure fastening.
- **Thread Size:** M12 thread size for compatibility with a wide range of applications.
- **Fixing Hole Diameter:** 16 mm fixing hole diameter for easy installation.
- **Length:** 24 mm length provides optimal grip and stability.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

## Product Description

RS PRO offers a high-quality M12 rivet nut designed for secure fastening in various industrial applications. Made from durable A2/304 stainless steel, this rivet nut provides excellent corrosion resistance and reliability, making it ideal for use in demanding environments.


## General Specifications

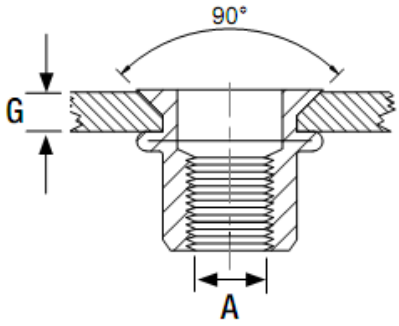
| | |
|---|---|
| Material | A2/304 Stainless Steel |
| Product Type | Rivet Nut |
| Sub Type | Nut |
| Thread Size | M12 |
| Fixing Hole Diameter | 16 mm |
| Head Type | Countersunk |


## Mechanical Specifications

| | |
|---|---|
| Diameter | 15.9 mm |
| Length | 24 mm |
| Maximum Grip | 5 mm |
| Minimum Grip | 1.7 mm |
| Shear Strength | 6500 N |
| Tensile Strength | 48000 N |
| Maximum Tightening Torque | 44 Nm |

## Technical Diagrams




| Thread Size mm | Grip Range Min mm | Grip Range Max mm | Hole Size mm | Body Diameter mm | Flange Diameter mm | Flange Thickness mm | Body Overall Length mm | Max Tightening Torque Nm | Tensile Strength N | Box Quantity |
|---|---|---|---|---|---|---|---|---|---|---|
| A | G | G | | B | H | T | L | | | |
| **M3** | 1.6 | 3.0 | 5.0 | 4.9 | 7.5 | 1.5 | 8.5 | 1.0 | 3900 | 2000 |
| | 1.5 | 3.0 | 5.0 | 4.9 | 7.5 | 1.5 | 12.0 | 1.0 | 3900 | 1000 |
| M4 | 3.0 | 4.5 | 6.0 | 5.9 | 9.0 | 1.5 | 13.0 | 3.0 | 6800 | 1500 |
| **M5** | 1.5 | 3.5 | 7.0 | 6.9 | 10.0 | 1.5 | 13.0 | 6.0 | 10000 | 500 |
| | 3.5 | 5.0 | 7.0 | 6.9 | 10.0 | 1.5 | 15.0 | 6.0 | 10000 | 500 |
| **M6** | 1.5 | 4.0 | 9.0 | 8.9 | 12.0 | 1.5 | 15.5 | 10.0 | 15000 | 500 |
| | 4.0 | 6.0 | 9.0 | 8.9 | 12.0 | 1.5 | 17.0 | 10.0 | 15000 | 400 |
| **M8** | 2.0 | 4.5 | 11.0 | 10.9 | 14.0 | 1.7 | 18.5 | 24.0 | 27000 | 250 |
| | 4.5 | 6.0 | 11.0 | 10.9 | 14.0 | 1.7 | 19.0 | 24.0 | 27000 | 250 |
| **M10** | 2.0 | 5.0 | 13.0 | 12.9 | 16.0 | 1.7 | 21.0 | 32.0 | 28500 | 250 |
| | 5.0 | 6.5 | 13.0 | 12.9 | 16.0 | 1.7 | 24.0 | 32.0 | 28500 | 100 |
| **M12** | 1.7 | 5.0 | 16.0 | 15.9 | 18.0 | 1.8 | 24.0 | 44.0 | 48000 | 100 |
| | 4.5 | 7.5 | 16.0 | 15.9 | 18.0 | 1.8 | 27.5 | 44.0 | 48000 | 100 |