RS PRO A2/304 Stainless Steel Countersunk Head Blind Rivet Nut, M4 x 17.5mm long

Supplier Part Number: RNSSCHC0435



FEATURES

- **Material:** A2/304 stainless steel provides excellent corrosion resistance and durability.
- **Thread Size:** M4 thread size ensures compatibility with a wide range of fasteners.
- **Fixing Hole Diameter:** 6 mm fixing hole diameter for easy installation.
- **Length:** 17.5 mm length for versatile application use.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

This RS PRO M4 Rivet Nut is designed for secure fastening in various applications. Made from A2/304 stainless steel, it offers excellent corrosion resistance and durability, making it ideal for use in harsh environments. The rivet nut is suitable for applications requiring a strong and reliable threaded insert.


General Specifications


Material	A2/304 Stainless Steel
Product Type	Rivet Nut
Sub Type	Nut
Thread Size	M4
Fixing Hole Diameter	6 mm
Head Type	Countersunk


Mechanical Specifications

Diameter	5.9 mm
Length	17.5 mm
Maximum Grip	3.5 mm
Minimum Grip	1.5 mm
Shear Strength	1500 N
Tensile Strength	6800 N
Maximum Tightening Torque	3 Nm

Technical Diagrams



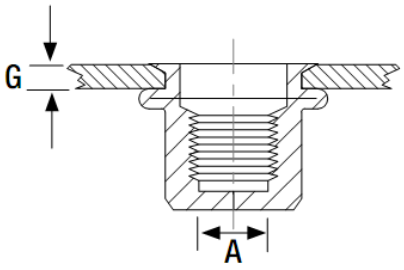



Thread Size mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Body Diameter mm	Flange Diameter mm	Flange Body Overall Thickness mm Length mm (T) (L)	Max Tightening Torque Nm	Tensile Strength N	Box Quantity
A	G	G		B	H				
M4	1.5	3.5	6.0	5.9	9.0	17.5	3.0	6800	1000
M5	1.5	3.5	7.0	6.9	10.0	20.0	6.0	10000	500
M6	1.5	4.0	9.0	8.9	12.0	23.0	10.0	15000	500
M8	1.5	4.5	11.0	10.9	14.0	26.5	24.0	27000	250
M10	1.5	5.0	13.0	12.9	16.0	1.7 30.0	32.0	28500	100