RS PRO A2/304 Stainless Steel Countersunk Head Blind Rivet Nut, M6 x 23mm long

Supplier Part Number: RNSSCHC0640



FEATURES

- **Material:** A2/304 stainless steel provides high corrosion resistance and durability.
- **Thread Size:** M6 thread size allows for compatibility with a wide range of fasteners.
- **Length:** 23 mm length ensures a secure fit in various applications.
- **Fixing Hole Diameter:** 9 mm fixing hole diameter for easy installation.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

The RS PRO M6 Rivet Nut is designed for secure fastening in various industrial applications. Made from A2/304 stainless steel, it offers excellent corrosion resistance and durability. Ideal for use in environments where strength and reliability are critical, this rivet nut ensures a robust and lasting connection.


General Specifications


Material	A2/304 Stainless Steel
Product Type	Rivet Nut
Sub Type	Nut
Thread Size	M6
Fixing Hole Diameter	9 mm
Head Type	Countersunk


Mechanical Specifications

Diameter	8.9 mm
Length	23 mm
Maximum Grip	4 mm
Minimum Grip	1.5 mm
Shear Strength	3000 N
Tensile Strength	15000 N
Maximum Tightening Torque	10 Nm

Technical Diagrams



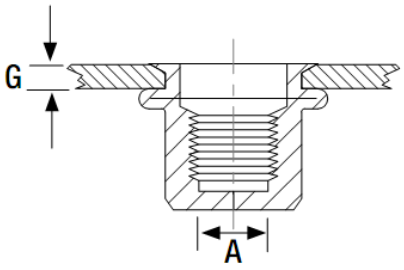



Thread Size mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Body Diameter mm	Flange Diameter mm	Flange Body Overall Thickness mm Length mm (T) (L)	Max Tightening Torque Nm	Tensile Strength N	Box Quantity
A	G	G		B	H				
M4	1.5	3.5	6.0	5.9	9.0	17.5	3.0	6800	1000
M5	1.5	3.5	7.0	6.9	10.0	20.0	6.0	10000	500
M6	1.5	4.0	9.0	8.9	12.0	23.0	10.0	15000	500
M8	1.5	4.5	11.0	10.9	14.0	26.5	24.0	27000	250
M10	1.5	5.0	13.0	12.9	16.0	1.7 30.0	32.0	28500	100