RS PRO A2/304 Stainless Steel Reduced Head Blind Rivet Nut, M4 x 15mm long

Supplier Part Number: RNSSRHC0420



FEATURES

- **Material:** A2/304 stainless steel provides high corrosion resistance and durability.
- **Thread Size:** M4 thread size ensures compatibility with a wide range of fasteners.
- **Length:** 15 mm length offers versatility for various applications.
- **Fixing Hole Diameter:** 6 mm fixing hole diameter allows for easy installation.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

This RS PRO M4 Rivet Nut is designed for secure fastening in a variety of applications. Made from A2/304 stainless steel, it offers excellent corrosion resistance and durability, making it ideal for use in demanding environments. The rivet nut's 15 mm length and 5.9 mm diameter provide a reliable solution for joining materials where access is only available from one side.


General Specifications


Material	A2/304 Stainless Steel
Product Type	Rivet Nut
Sub Type	Nut
Thread Size	M4
Fixing Hole Diameter	6 mm
Head Type	Reduced


Mechanical Specifications

Diameter	5.9 mm
Length	15 mm
Maximum Grip	2 mm
Minimum Grip	0.5 mm
Shear Strength	1500 N
Tensile Strength	6800 N
Maximum Tightening Torque	3 Nm

Technical Diagrams



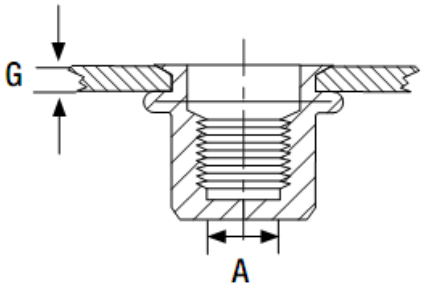



Thread Size mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Body Diameter mm	Flange Diameter mm	Flange Thickness mm	Body Overall Length mm	Max Tightening Torque Nm	Tensile Strength N	Box Quantity
A	G	G		B	H	T	L			
M3	1.5	2.5	5.0	4.9	6.0	0.4	13.0	1.0	3900	2000
	0.5	2.0	5.0	4.9	6.0	0.4	15.0	1.0	3900	1000
M4	2.0	4.0	6.0	5.9	7.0	0.5	16.5	3.0	6800	1000
M5	0.5	2.0	7.0	6.9	8.0	0.5	16.5	6.0	10000	1000
	2.0	4.0	7.0	6.9	8.0	0.6	18.0	6.0	10000	1000
M6	0.5	2.5	9.0	8.9	10.0	0.6	20.5	10.0	15000	500
	2.5	4.5	9.0	8.9	10.0	0.6	22.0	10.0	15000	500
M8	0.5	3.0	11.0	10.9	12.3	0.6	23.0	24.0	27000	250
	3.0	5.0	11.0	10.9	12.3	0.9	24.5	24.0	27000	250
M10	1.0	3.5	13.0	12.9	14.5	0.9	24.5	32.0	28500	200
	3.5	5.5	13.0	12.9	14.5	0.9	26.0	32.0	28500	200