RS PRO A2/304 Stainless Steel Reduced Head Blind Rivet Nut, M6 x 20.5mm long

Supplier Part Number: RNSSRHC0625



FEATURES

- **Material:** A2/304 stainless steel for enhanced corrosion resistance and durability
- **Diameter:** 8.9 mm diameter ensures a secure fit in pre-drilled holes
- **Fixing Hole Diameter:** 9 mm fixing hole diameter for easy installation
- **Length:** 20.5 mm length provides a strong and stable connection
- **Thread Size:** M6 thread size for compatibility with standard M6 bolts and screws

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

RS PRO offers a high-quality M6 rivet nut designed for secure fastening in various industrial applications. Made from A2/304 stainless steel, this rivet nut provides excellent corrosion resistance and durability, making it ideal for use in harsh environments.


General Specifications


Material	A2/304 Stainless Steel
Product Type	Rivet Nut
Sub Type	Nut
Thread Size	M6
Fixing Hole Diameter	9 mm
Head Type	Reduced


Mechanical Specifications

Diameter	8.9 mm
Length	20.5 mm
Maximum Grip	2.5 mm
Minimum Grip	0.5 mm
Shear Strength	3000 N
Tensile Strength	15000 N
Maximum Tightening Torque	10 Nm

Technical Diagrams



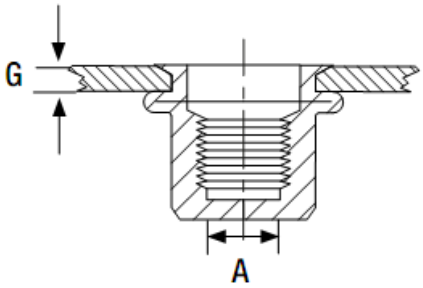



Thread Size mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Body Diameter mm	Flange Diameter mm	Flange Thickness mm	Body Overall Length mm	Max Tightening Torque Nm	Tensile Strength N	Box Quantity
A	G	G		B	H	T	L			
M3	1.5	2.5	5.0	4.9	6.0	0.4	13.0	1.0	3900	2000
	0.5	2.0	5.0	4.9	6.0	0.4	15.0	1.0	3900	1000
M4	2.0	4.0	6.0	5.9	7.0	0.5	16.5	3.0	6800	1000
M5	0.5	2.0	7.0	6.9	8.0	0.5	16.5	6.0	10000	1000
	2.0	4.0	7.0	6.9	8.0	0.6	18.0	6.0	10000	1000
M6	0.5	2.5	9.0	8.9	10.0	0.6	20.5	10.0	15000	500
	2.5	4.5	9.0	8.9	10.0	0.6	22.0	10.0	15000	500
M8	0.5	3.0	11.0	10.9	12.3	0.6	23.0	24.0	27000	250
	3.0	5.0	11.0	10.9	12.3	0.9	24.5	24.0	27000	250
M10	1.0	3.5	13.0	12.9	14.5	0.9	24.5	32.0	28500	200
	3.5	5.5	13.0	12.9	14.5	0.9	26.0	32.0	28500	200