RS PRO A2/304 Stainless Steel Reduced Head Blind Rivet Nut, M8 x 23mm long

Supplier Part Number: RNSSRHC0830

FEATURES

- **Material:** A2/304 stainless steel provides high corrosion resistance and durability.
- **Thread Size:** M8 thread size ensures compatibility with a wide range of applications.
- **Length:** 23 mm length allows for secure fastening in thicker materials.
- **Fixing Hole Diameter:** 11 mm fixing hole diameter for easy installation.



RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

The RS PRO M8 Rivet Nut is designed for secure fastening in various industrial applications. Made from A2/304 stainless steel, it offers excellent corrosion resistance and durability. This rivet nut is ideal for use in environments where strength and reliability are crucial.


General Specifications


Material	A2/304 Stainless Steel
Product Type	Rivet Nut
Sub Type	Nut
Thread Size	M8
Fixing Hole Diameter	11 mm
Head Type	Reduced


Mechanical Specifications

Diameter	10.9 mm
Length	23 mm
Maximum Grip	3 mm
Minimum Grip	0.5 mm
Shear Strength	4400 N
Tensile Strength	27000 N
Maximum Tightening Torque	24 Nm

Technical Diagrams



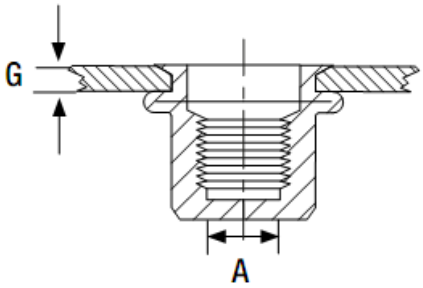



Thread Size mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Body Diameter mm	Flange Diameter mm	Flange Thickness mm	Body Overall Length mm	Max Tightening Torque Nm	Tensile Strength N	Box Quantity
A	G	G		B	H	T	L			
M3	1.5	2.5	5.0	4.9	6.0	0.4	13.0	1.0	3900	2000
	0.5	2.0	5.0	4.9	6.0	0.4	15.0	1.0	3900	1000
M4	2.0	4.0	6.0	5.9	7.0	0.5	16.5	3.0	6800	1000
M5	0.5	2.0	7.0	6.9	8.0	0.5	16.5	6.0	10000	1000
	2.0	4.0	7.0	6.9	8.0	0.6	18.0	6.0	10000	1000
M6	0.5	2.5	9.0	8.9	10.0	0.6	20.5	10.0	15000	500
	2.5	4.5	9.0	8.9	10.0	0.6	22.0	10.0	15000	500
M8	0.5	3.0	11.0	10.9	12.3	0.6	23.0	24.0	27000	250
	3.0	5.0	11.0	10.9	12.3	0.9	24.5	24.0	27000	250
M10	1.0	3.5	13.0	12.9	14.5	0.9	24.5	32.0	28500	200
	3.5	5.5	13.0	12.9	14.5	0.9	26.0	32.0	28500	200