RS PRO A2/304 Stainless Steel Reduced Head Blind Rivet Nut, M8 x 24.5mm long

Supplier Part Number: RNSSRHC0850



FEATURES

- **Material:** A2/304 stainless steel provides superior corrosion resistance.
- **Thread Size:** M8 thread size for compatibility with standard fasteners.
- **Length:** 24.5 mm length for versatile application use.
- **Fixing Hole Diameter:** 11 mm for easy installation.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

RS PRO offers a high-quality M8 rivet nut designed for secure and reliable fastening in various industrial applications. Made from A2/304 stainless steel, this rivet nut provides excellent corrosion resistance, making it ideal for use in harsh environments. Its robust construction ensures long-lasting performance and durability.


General Specifications


Material	A2/304 Stainless Steel
Product Type	Rivet Nut
Sub Type	Nut
Thread Size	M8
Fixing Hole Diameter	11 mm
Head Type	Reduced


Mechanical Specifications

Diameter	10.9 mm
Length	24.5 mm
Maximum Grip	5 mm
Minimum Grip	3 mm
Shear Strength	4400 N
Tensile Strength	27000 N
Maximum Tightening Torque	24 Nm

Technical Diagrams



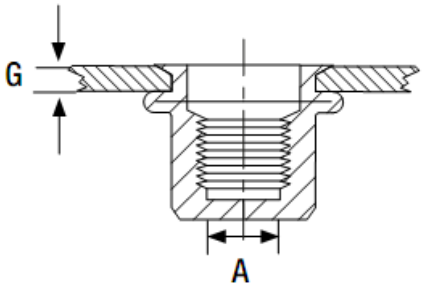



Thread Size mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Body Diameter mm	Flange Diameter mm	Flange Thickness mm	Body Overall Length mm	Max Tightening Torque Nm	Tensile Strength N	Box Quantity
A	G	G		B	H	T	L			
M3	1.5	2.5	5.0	4.9	6.0	0.4	13.0	1.0	3900	2000
	0.5	2.0	5.0	4.9	6.0	0.4	15.0	1.0	3900	1000
M4	2.0	4.0	6.0	5.9	7.0	0.5	16.5	3.0	6800	1000
M5	0.5	2.0	7.0	6.9	8.0	0.5	16.5	6.0	10000	1000
	2.0	4.0	7.0	6.9	8.0	0.6	18.0	6.0	10000	1000
M6	0.5	2.5	9.0	8.9	10.0	0.6	20.5	10.0	15000	500
	2.5	4.5	9.0	8.9	10.0	0.6	22.0	10.0	15000	500
M8	0.5	3.0	11.0	10.9	12.3	0.6	23.0	24.0	27000	250
	3.0	5.0	11.0	10.9	12.3	0.9	24.5	24.0	27000	250
M10	1.0	3.5	13.0	12.9	14.5	0.9	24.5	32.0	28500	200
	3.5	5.5	13.0	12.9	14.5	0.9	26.0	32.0	28500	200