RS PRO A2/304 Stainless Steel Reduced Head Blind Rivet Nut, M10 x 26mm long

Supplier Part Number: RNSSRHC1055



FEATURES

- **Material:** A2/304 stainless steel provides excellent corrosion resistance and durability.
- **Thread Size:** M10 thread size ensures compatibility with a wide range of bolts and screws.
- **Diameter:** 12.9 mm diameter allows for secure fitting in pre-drilled holes.
- **Fixing Hole Diameter:** 13 mm fixing hole diameter ensures easy installation.
- **Length:** 26 mm length offers versatility in various applications.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

The RS PRO M10 Rivet Nut is designed for secure fastening in various industrial applications. Made from durable A2/304 stainless steel, it offers excellent corrosion resistance and reliability. Ideal for use where a strong, permanent thread is required in thin materials.


General Specifications


Material	A2/304 Stainless Steel
Product Type	Rivet Nut
Sub Type	Nut
Thread Size	M10
Fixing Hole Diameter	13 mm
Head Type	Reduced


Mechanical Specifications

Diameter	12.9 mm
Length	26 mm
Maximum Grip	5.5 mm
Minimum Grip	3.5 mm
Shear Strength	5000 N
Tensile Strength	28500 N
Maximum Tightening Torque	32 Nm

Technical Diagrams



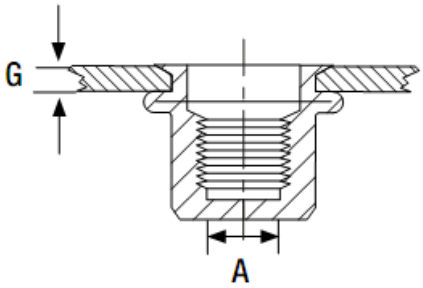



Thread Size mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Body Diameter mm	Flange Diameter mm	Flange Thickness mm	Body Overall Length mm	Max Tightening Torque Nm	Tensile Strength N	Box Quantity
A	G	G		B	H	T	L			
M3	1.5	2.5	5.0	4.9	6.0	0.4	13.0	1.0	3900	2000
	0.5	2.0	5.0	4.9	6.0	0.4	15.0	1.0	3900	1000
M4	2.0	4.0	6.0	5.9	7.0	0.5	16.5	3.0	6800	1000
M5	0.5	2.0	7.0	6.9	8.0	0.5	16.5	6.0	10000	1000
	2.0	4.0	7.0	6.9	8.0	0.6	18.0	6.0	10000	1000
M6	0.5	2.5	9.0	8.9	10.0	0.6	20.5	10.0	15000	500
	2.5	4.5	9.0	8.9	10.0	0.6	22.0	10.0	15000	500
M8	0.5	3.0	11.0	10.9	12.3	0.6	23.0	24.0	27000	250
	3.0	5.0	11.0	10.9	12.3	0.9	24.5	24.0	27000	250
M10	1.0	3.5	13.0	12.9	14.5	0.9	24.5	32.0	28500	200
	3.5	5.5	13.0	12.9	14.5	0.9	26.0	32.0	28500	200