RS PRO A2/304 Stainless Steel Reduced Head Blind Rivet Nut, M6 x 21.5mm long

Supplier Part Number: RNSSRHPHC0630



FEATURES

- **Material:** A2/304 stainless steel provides excellent corrosion resistance and durability.
- **Thread Size:** M6 thread size ensures compatibility with a wide range of applications.
- **Diameter:** 8.9 mm diameter allows for secure and stable fastening.
- **Length:** 21.5 mm length offers versatility in different installation scenarios.
- **Fixing Hole Diameter:** 9 mm fixing hole diameter for ease of installation.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

RS PRO offers a high-quality M6 rivet nut designed for secure fastening in various industrial applications. Made from durable A2/304 stainless steel, this rivet nut provides excellent corrosion resistance and reliability. It is ideal for use in environments where strength and durability are critical.


General Specifications

Material	A2/304 Stainless Steel
Product Type	Rivet Nut
Sub Type	Nut
Thread Size	M6
Fixing Hole Diameter	9 mm
Head Type	Reduced

Mechanical Specifications

Diameter	8.9 mm
Length	21.5 mm
Maximum Grip	3.5 mm
Minimum Grip	1 mm
Shear Strength	3000 N
Tensile Strength	15000 N
Maximum Tightening Torque	12 Nm

Technical Diagrams

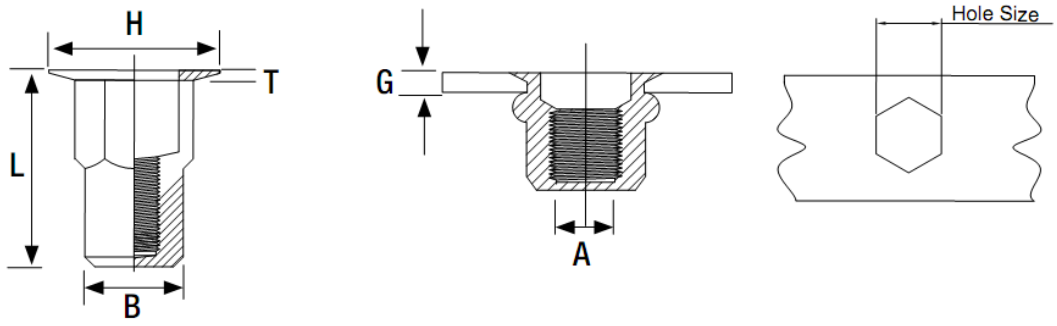

Thread Size mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Body Diameter mm	Flange Diameter mm	Flange Thickness mm	Body Overall Length mm	Max Tightening Torque Nm	Tensile Strength N	Box Quantity
A	G	G		B	H	T	L			
M4	0.5	2.0	6.0	5.9	7.0	0.5	15.5	4.0	6800	1000
	2.0	4.0	6.0	5.9	7.0	0.5	17.5	4.0	6800	1000
M5	0.5	2.5	7.0	6.9	8.0	0.5	18.0	6.5	10000	1000
	2.0	4.0	7.0	6.9	8.0	0.6	20.0	6.5	10000	1000
M6	1.0	3.5	9.0	8.9	10.0	0.6	21.5	12.0	15000	500
	3.0	5.0	9.0	8.9	10.0	0.6	23.0	12.0	15000	500
M8	1.0	3.5	11.0	10.9	12.5	0.6	24.0	31.0	27000	250
	3.0	5.5	11.0	10.9	12.5	0.9	26.0	31.0	27000	250
M10	1.0	4.0	13.0	12.9	14.5	0.9	30.5	42.0	28500	150