# RS PRO A2/304 Stainless Steel Reduced Head Blind Rivet Nut, M6 x 23mm long

Supplier Part Number: RNSSRHPHC0650



## FEATURES

- **Material:** A2/304 stainless steel ensures excellent corrosion resistance and durability.
- **Thread Size:** M6 thread size provides compatibility with a wide range of bolts and screws.
- **Length:** 23 mm length allows for secure installation in diverse material thicknesses.
- **Fixing Hole Diameter:** 9 mm fixing hole diameter facilitates easy installation.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

## Product Description

RS PRO offers a high-quality M6 rivet nut made from A2/304 stainless steel, designed for secure fastening in various industrial applications. This rivet nut is ideal for providing strong, reliable threads in thin materials where a traditional nut and bolt would be impractical.


## General Specifications

| | |
|---|---|
| Material | A2/304 Stainless Steel |
| Product Type | Rivet Nut |
| Sub Type | Nut |
| Thread Size | M6 |
| Fixing Hole Diameter | 9 mm |
| Head Type | Reduced |

## Mechanical Specifications

| | |
|---|---|
| Diameter | 8.9 mm |
| Length | 23 mm |
| Maximum Grip | 5 mm |
| Minimum Grip | 3 mm |
| Shear Strength | 3000 N |
| Tensile Strength | 15000 N |
| Maximum Tightening Torque | 12 Nm |

## Technical Diagrams

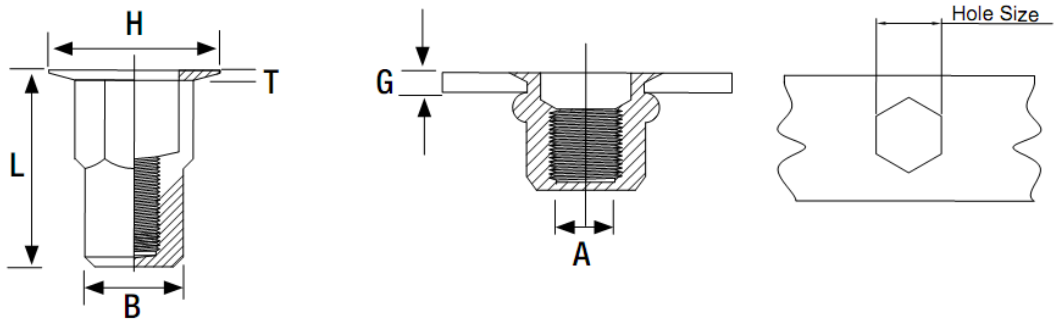


| Thread Size mm | Grip Range Min mm | Grip Range Max mm | Hole Size mm | Body Diameter mm | Flange Diameter mm | Flange Thickness mm | Body Overall Length mm | Max Tightening Torque Nm | Tensile Strength N | Box Quantity |
|---|---|---|---|---|---|---|---|---|---|---|
| A | G | G | | B | H | T | L | | | |
| **M4** | 0.5 | 2.0 | 6.0 | 5.9 | 7.0 | 0.5 | 15.5 | 4.0 | 6800 | 1000 |
| | 2.0 | 4.0 | 6.0 | 5.9 | 7.0 | 0.5 | 17.5 | 4.0 | 6800 | 1000 |
| **M5** | 0.5 | 2.5 | 7.0 | 6.9 | 8.0 | 0.5 | 18.0 | 6.5 | 10000 | 1000 |
| | 2.0 | 4.0 | 7.0 | 6.9 | 8.0 | 0.6 | 20.0 | 6.5 | 10000 | 1000 |
| **M6** | 1.0 | 3.5 | 9.0 | 8.9 | 10.0 | 0.6 | 21.5 | 12.0 | 15000 | 500 |
| | 3.0 | 5.0 | 9.0 | 8.9 | 10.0 | 0.6 | 23.0 | 12.0 | 15000 | 500 |
| **M8** | 1.0 | 3.5 | 11.0 | 10.9 | 12.5 | 0.6 | 24.0 | 31.0 | 27000 | 250 |
| | 3.0 | 5.5 | 11.0 | 10.9 | 12.5 | 0.9 | 26.0 | 31.0 | 27000 | 250 |
| M10 | 1.0 | 4.0 | 13.0 | 12.9 | 14.5 | 0.9 | 30.5 | 42.0 | 28500 | 150 |