

zero_{db}

Product Brochure

Rhythmic Influence for a Magical Experience.





Design:

Technology And Emotion, Hand in Hand

Technology:

Daringly Going Beyond Limits

Quality:

Passion And Care Are The True Drivers

Surrounded by beautiful nature in Germany, we design our speakers at our Head quarter in Germany. The synergy of expertise and craftsmanship leads to high-quality, durable products. Our attention to detail and the components used in speaker, make our products highly desirable

***German Brand, Natural Sound
Quality, Eternal Quality, Enjoy
The Sound Of Nature Shen***



German Brand



High Fidelity Sound Quality

40 Years' Experience

Specifications:

Type	6.5" Ceiling speaker
Frequency Range	64~25KHz(-10dB)
Frequency Response	75~25KHz(± 3 dB)
Recommended Amplified Power	25-180W
Sensitivity(1W/1M)	93dB
Maximum SPL	108dB
Nominal Impedance	4ohms
Crossover	2.KHz
LF Woofer	1x6. 5"Ø30mmVC
HF Driver	1x1"Ø25mmVC
Dispersion/-6dB	140°
Product Size(WxDxH)	Panel size: Ø229x131mm Hole size::Ø210(Depth > 133mm)
Package Size(WxDxH)	303x303x190mm
Net Weight	2. 3Kg/pc
Gross Weight	3. 5Kg/pc
Connectors	Nickel plated crimping terminal
Enclosure	ABS
Grille	Metal
Fittings	Screw type flying hook


zero_{db} ICD-61

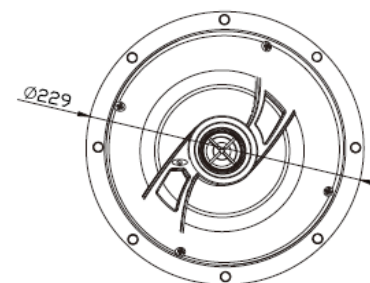

Specifications:

Type	6. 5", 2-Way 2-unit full range speaker
Frequency Range	46~35KHz(-10dB)
Frequency Response	75~25KHz(±3dB)
Recommended Amplified Power	50-350W
Sensitivity(1W/1M)	90dB
Maximum SPL	118dB
Nominal Impedance	4ohms
Crossover	2. 5KHz
LF Woofer	1x6. 5"Ø30mmVC
HF Driver	1x1"Ø25mmVC silk dia. dome tweeter
Product Size(WxDxH)	Panel size: 243x2x385mm Cabinet size: 210x104x346mm Hole size(WxH): 215x351(Depth > 110mm)
Package Size(WxDxH)	460x316x190mm
Net Weight	5. 05Kg/pc
Gross Weight	6. 15Kg/pc
Connectors	Nickel plated crimping terminal
Enclosure	High grade MDF, matt black painting
Grille	Wooden grille with acoustic cloth
Fittings	Screw type hook

zero_{db} IWD-61

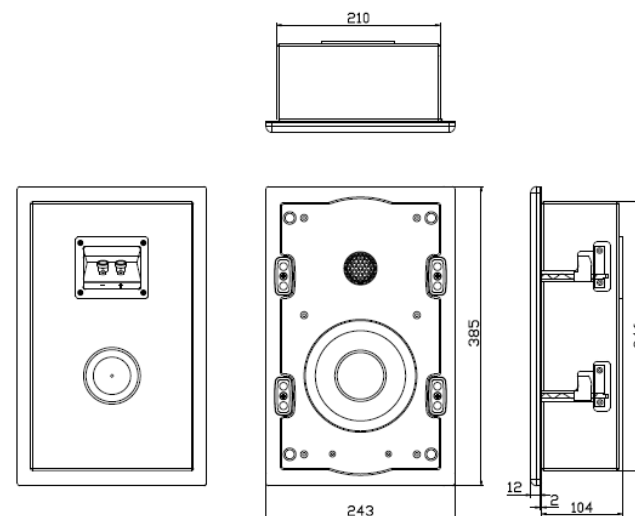

zero_{db}

IWD-62

Specifications:


Type	Dual 6. 5", 2-Way 3-unit full range speaker
Frequency Range	60~30KHz(-10dB)
Frequency Response	70~25KHz(±3dB)
Recommended Amplified Power	50-450W
Sensitivity(1W/1M)	93dB
Maximum SPL	110dB
Nominal Impedance	4ohms
Crossover	2. 4KHz
LF Woofer	2x6. 5"Ø30mmVC
HF Driver	1x1"Ø25mmVC silk dia. dome tweeter
Product Size(WxDxH)	Panel size: 243x2x559mm Cabinet size: 210x104x518mm Hole size(WxH): 215x523(Depth > 110mm)
Package Size(WxDxH)	633x317x190mm
Net Weight	8. 05 Kg/pc
Gross Weight	9. 55Kg/pc
Connectors	Nickel plated crimping terminal
Enclosure	High grade MDF, matt black painting
Grille	Wooden grille with acoustic cloth
Fittings	Screw type hook



Specifications:

Type	6. 5", 2-Way 2-unit full range speaker
Frequency Range	46~35KHz(-10dB)
Frequency Response	54~30KHz(±3dB)
Recommended Amplified Power	50-400W
Sensitivity(1W/1M)	93dB
Maximum SPL	106dB
Nominal Impedance	4ohms
Crossover	2. 4KHz
LF Woofer	1x6. 5"Ø30mmVC
HF Driver	1xAMT pneumatic compression driver
Dispersion/-6dB	142°x111°
Product Size(WxDxH)	Panel size: 243x2x385mm Cabinet size: 210x104x346mm Hole size(WxH): 215x351(Depth > 110mm)
Package Size(WxDxH)	460x316x190mm
Net Weight	5. 4Kg/pc
Gross Weight	6. 65Kg/pc
Connectors	Nickel plated crimping terminal
Enclosure	High grade MDF,matt black painting
Grille	Wooden grille with acoustic cloth

zero_{db} IWR-61

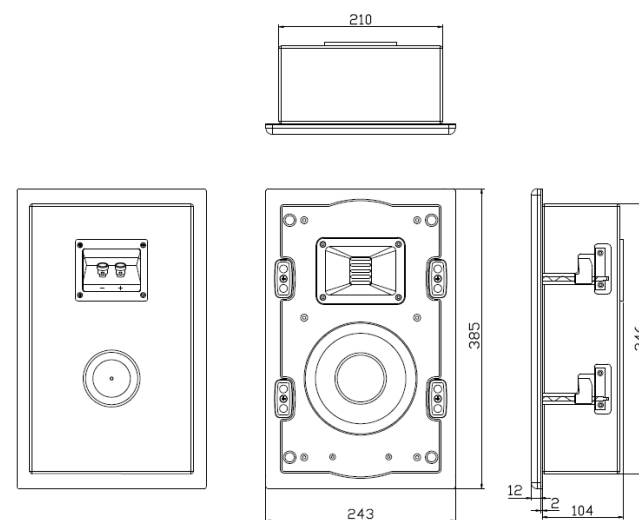


zero_{db}

IWR-62

Specifications:

Type	Dual 6. 5", 2-Way 3-unit full range speaker
Frequency Range	42~35KHz(-10dB)
Frequency Response	50~30KHz(±3dB)
Recommended Amplified Power	50-450W
Sensitivity(1W/1M)	93dB
Maximum SPL	110dB
Nominal Impedance	4ohms
Crossover	2. 4KHz
LF Woofer	2x6. 5"Ø30mmVC
HF Driver	1xAMT pneumatic compression driver
Dispersion/-6dB	142°x111°
Product Size(WxDxH)	Panel size: 243x2x559mm Cabinet size: 210x104x518mm
Package Size(WxDxH)	Hole size(WxH): 215x523(Depth > 110mm) 633x317x190mm
Net Weight	8. 15 Kg/pc
Gross Weight	9. 65Kg/pc
Connectors	Nickel plated crimping terminal
Enclosure	High grade MDF, matt black painting
Grille	Wooden grille with acoustic cloth

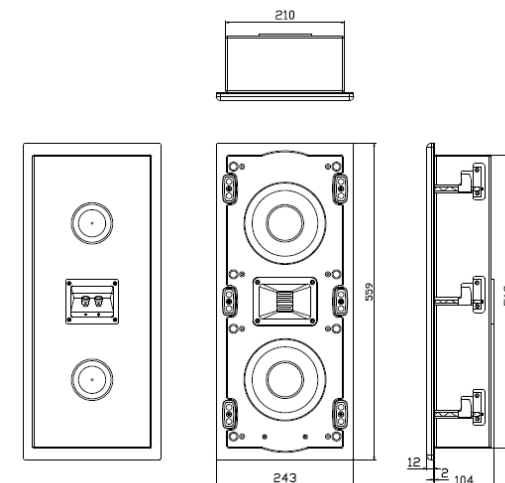


Specifications:

Type	Dual 8", 3-Way 4-unit full range speaker
Frequency Range	36~35KHz(-10dB)
Frequency Response	40~30KHz(±3dB)
Recommended Amplified Power	50-575W
Sensitivity(1W/1M)	92dB
Maximum SPL	118dB
Nominal Impedance	4ohms
Crossover	1. 5KHz, 8KHz
LF Woofer	1x8"Ø35mmVC
Mid-range Driver	2x3"Ø19mmVC
HF Driver	1xAMT pneumatic compression driver
Product Size(WxDxH)	Panel size: 294x4x710mm Cabinet size: 254x145x680mm Hole size(WxH): 260x686(Depth > 153mm)
Package Size(WxDxH)	794x380x236mm
Net Weight	14. 8 Kg/pc
Gross Weight	16. 65Kg/pc
Connectors	Nickel plated crimping terminal
Enclosure	High grade MDF, matt black painting
Grille	Wooden grille with acoustic cloth

zero_{db}

IWR-821

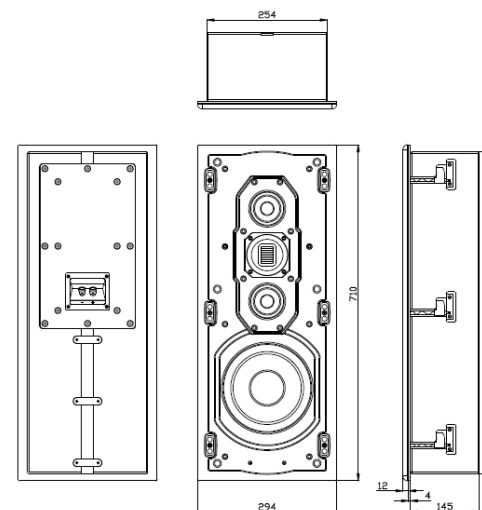

Specifications:

Type	8", 3-Way 7-unit full range speaker
Frequency Range	32~35KHz(-10dB)
Frequency Response	38~30KHz(±3dB)
Recommended Amplified Power	50-600W
Sensitivity(1W/1M)	93dB
Maximum SPL	120dB
Nominal Impedance	4ohms
Crossover	800Hz, 3KHz
LF Woofer	2x8"Ø35mmVC
Mid-range Driver	4x3"Ø19mmVC
HF Driver	3xAMT pneumatic compression driver
Product Size(WxDxH)	Panel size: 360x4x940mm Cabinet size: 320x152x910mm Hole size(WxH): 326x916(Depth > 160mm)
Package Size(WxDxH)	1034x454x243mm
Net Weight	23. 75Kg/pc
Gross Weight	26. 35 Kg/pc
Connectors	Nickel plated crimping terminal
Enclosure	High grade MDF, matt black painting
Grille	Wooden grille with acoustic cloth

zero_{db}

IWR-843



zero_{db}

Product Brochure



www.thezerodb.com

German Brand

High Fidelity Sound Quality

40 Years' Experience