# 4MP Motorized Smart VF Network IR Bullet Camera

Model No: SIP-EB403



## Key Features

### Optics

- Day/night functionality
- Smart IR, up to 30m(98ft) IR distance
- Up to 120dB optical WDR (Wide Dynamic Range)
- 3D DNR (Digital Noise Reduction)

### Compression

- Smart H.265 / H.265+ / H.265 / Smart H.264 / H.264+ / H.264 / MJPEG
- Embedded smart algorithm
- Triple streams
- ROI (Region of Interest)
- 9:16 corridor mode

### Network

- ONVIF Profile –S Conformance

### Structure

- Support PoE power supply
- Wide temperature range: -30°C to 60°C(-31°Fto140°F)
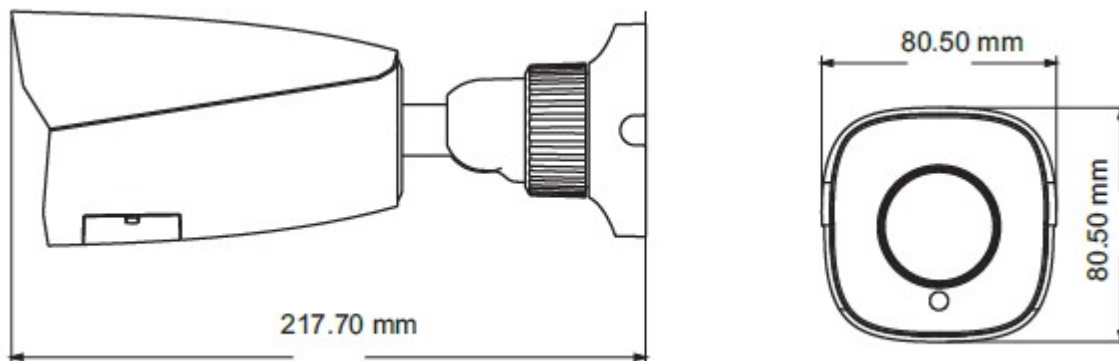- Wide voltage range of ±25%
- IP67

## Specifications

| Model No | SIP-EB403 |
|---|---|
| **Camera** | |
| Sensor | 1/2.8",4 megapixel, progressive scan CMOS |
| Shutter | Auto/Manual,1/10~1/100000s |
| Lens | 2.8~12mm,   AF automatic focusing and motorized zoom lens |
| Zoom/Focus | Motor drive |
| Angle of View(H) | 94.0° ~28° |
| Min. Illumination | 0.005 lux @ F1.6, AGC ON;<br>0 lux with IR |
| Day/Night | IR-cut filter with auto switch (ICR) |
| IR Range | Up to 30m (98ft) IR Range |
| S/N | >52dB |
| WDR | Optical WDR (up to 120 dB) |
| AGC,BLC,HLC | Support |
| White Balance | Support |
| **Video** | |
| Resolution | 4MP ( 2592 × 1520 ), 2K ( 2560 × 1440 ), 3MP ( 2304 × 1296 ),<br>1080P ( 1920 × 1080 ), 720P ( 1280 × 720 ), D1, CIF, 480 × 240,320xx240 |
| Video | Smart H.265 / H.265+ / H.265 / Smart H.264 / H.264+ / H.264 / MJPEG |
| Frame Rate | 4MP/2K/3MP/1080P / 720P( 1 ~ 30fps; 50Hz: 1~25fps )<br>HFR mode: 1080P / 720P( 60Hz : 1 ~ 60fps; 50Hz: 1~50fps |
| 9:16 Corridor | Supported |
| ROI | Supported |
| Video Streaming | Triple (CBR/VBR) |
| OSD | Date, Time and year, Text overlay, Text position |
| **Smart** | |
| Behavior | Intrusion, crossing line, motion detection, Camera Tampering |
| General Function | Watermark, IP Address Filtering, Tampering Alarm, Alarm input, Alarm output, Access Policy, ARP Protection, RTSP Authentication, User Authentication |
| **Audio** | |
| Audio | G.711A/U |
| **Storage** | |
| Edge Storage | Micro SD, Up to 128 GB |
| **Network** | |
| Protocols | TCP/IP,UDP, IPv4, IPv6, DHCP, NTP, RTSP, PPPoE, DNS,DDNS, SMTP, FTP, SNMP,HTTP, 802.1x, UPnP, HTTPs, QoS ,ICMP,IGMP |
| Compatible Integration | ONVIF(Profile S) |
| **Interface** | |
| Audio | 1CH audio input |

| Network | 1 RJ45 10M/100M Base-TX Ethernet |
|---|---|
| General | |
| Power | 12 V DC. Or PoE (IEEE802.3af)<br>Power consumption : Max 9.5 W |
| Dimensions in mm | 217.7 × 80.5 × 80.5 |
| Weight | Approx. 0.69KG |
| Working Environment | -30 °C  ~+60°C (-22°F~140°F),Humidity ≤ 95%RH(non- condensing) |
| Vandal Resistant | IK10 |
| Ingress Protection | IP67 |
| Certifications | CE,FCC,UL,ROHS |
| Accessories | Mounting kit with L/C brackets suitable for pole and surface mounts & patch cables |

**Note: The model numbers/Dimensions/Appearance are subject to change due to up gradation /version variations.**

## Dimensions



**Lookman Electroplast Industries Ltd,**

Old No-9, New No-15, 2nd Street Extn, 3rd Main Road, CIT Nagar, Nandanam, Chennai,

Tamilnadu-600035, India Ph:-04466222222.