





4MP 33X STARLIGHT IR NETWORK PTZ CAMERA

SIP-VPS4033AI

FEATURES :

- 33X Optical Zoom
- Smart IR, up to 150 m IR distance
- Optical glass window with higher light transmittance
- IR anti-reflection window to increase the infrared transmittance
- Smart H.265/H.265/H.264/MJPEG video compression
- Embedded smart algorithm
- Triple streams
- Customized OSD
- ONVIF Conformance
- More effective heat dissipation system
- Intelligent temperature control technology

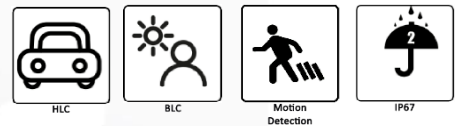

SPECIFICATION

CAMERA

Image Sensor	1/2.8", progressive scan, 4.0 megapixel, CMOS
Angle of view(H)	52.01°(Wide)~1.78° (tele)
Shutter	Auto/manual; shutter time 50Hz: 1 / 1 s ~ 1 / 25, 000 s 60Hz: 1 / 1 s ~ 1 / 30, 000 s
Iris Type	Auto/Manual; F1.6 ~ F4.4
Min. Illumination	Color: 0.005 lux (F1.5, AGC ON) 0 lux with IR
Lens	4.3 ~ 144 mm (33x optical zoom), AF automatic focusing and motorized zoom lens
IR Range	Up to 150m
Focus	Fixed
Day&Night	IR-cut filter with auto switch (ICR)
Wide Dynamic Range	120dB
BLC	Yes
HLC	Yes
Defog	Yes
Digital zoom	16x
Angle Adjustment	Pan: 0°~360°; Tilt:0°~75°; Rotation: 0°~360°

VIDEO

Video Compression	Smart H.265/H.265/H.264/MJPEG
H.264 code profile	Baseline profile, Main Profile, High Profile
Frame Rate	Main Stream: 4MP (2560x1440):Max. 30 fps; Sub Stream: 1.3MP (1280x720):Max. 30 fps; Third Stream: D1 (480x240): Max. 30 fps
Video Bit Rate	128Kbps – 6Mbps
S/N	>52dB
OSD	Up to 8 OSDs
Privacy Mask	Up to 4 areas
ROI	Up to 8 areas
Audio Compression	G711A / U
Image Settings	ROI, Saturation, Brightness, Hue, Contrast, Wide Dynamic, image mirror, image flip, Sharpness, NR, etc. adjustable through client software or web browser
Motion Detection	Up to 4 areas

SMART

Image Settings	Rotate Mode, Saturation, Brightness, Contrast, Sharpness adjustable by client software or web browser
Basic Event	Motion Detection, Video Tampering Detection, Exception
Smart Event	Object Removal Detection, Intrusion Detection, Line Crossing Detection, Vehicle Cross, Human Crossing Detection, People Intrusion and People Counting Support alarm triggering by human or vehicle, filtering flag or animal
General Function	Watermark, IP Address Filtering, Access Policy, ARP Protection, RTSP Authentication, User Authentication

STORAGE & NETWORK

Edge Storage	Micro SD, Up to 256 GB
Protocols	IPv4, IPv6 IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, 802.1x, SNMP, Bonjour
Compatible integration	ONVIF (Profile S, Profile G), API

PAN & TILT

Pan Range	360° (endless)
Pan Speed	0.1°/s ~ 80°/s Preset speed: 80°/s
Tilt Range	-5° ~ +90° (auto reverse)
Tilt Speed	0.1° ~ 80°/s Preset speed: 80°/s
Number of Presets	360
Patrol	Up to 8 patrols, up to 16 presets per patrol Note: The total number of patrols and patterns is 16.
Pattern	Up to 4 record patterns, Record time over 3 minutes for each patterns
Scheduled Task	Preset/Patrol/Track/Random Scan/Boundary Scanning /Dome Reboot

OTHERS

Power Supply	DC12V±25%, Power consumption: max.18W
Power Consumption	< 7.5W
Installation	Ceiling mounting; Wall mounting
Ingress Protection	IP67
Working Environment	-30°C ~ +60°C (-22°F ~ 140°F), Humidity: ≤ 90%RH(noncondensing)
Dimensions (mm)	Ø173x247 mm (Ø6.8" x 9.7")
Weight (net)	2.1 kg (4.63lb)
Certificate	CE, FCC
Environmental Protection	Complies with Directive EU RoHS, WEEE(2012/19/EU) , directive 94/62/EC and REACH(EC1907/2006)