




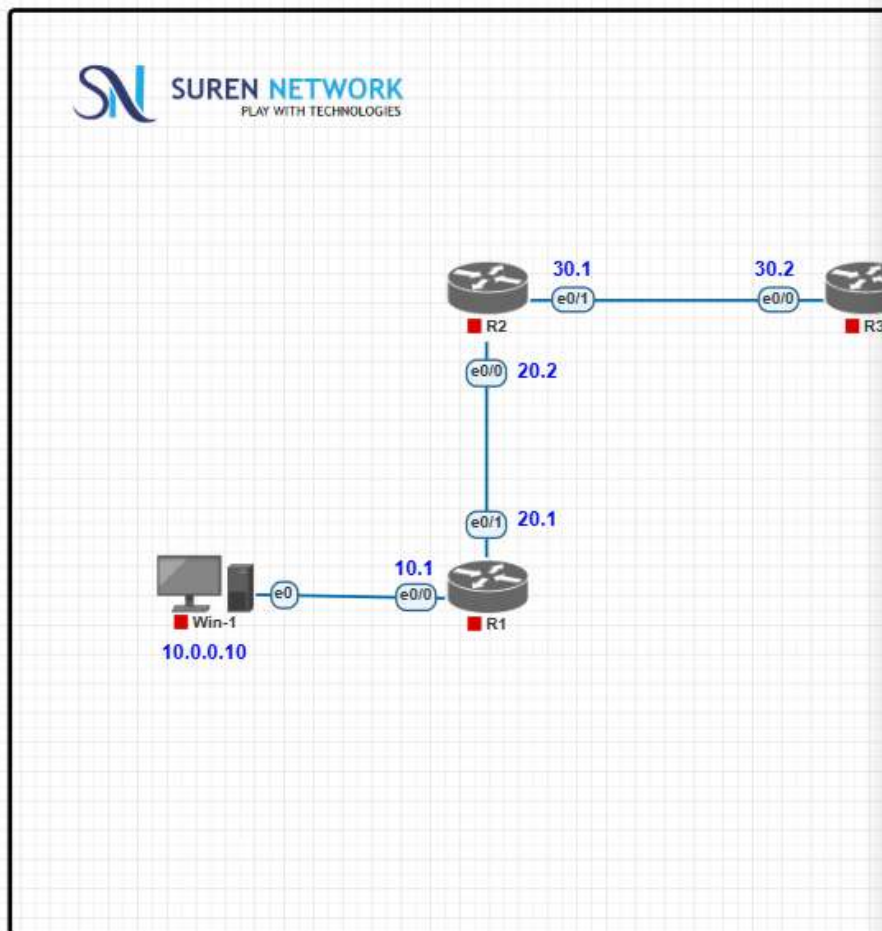

Router7

Physical Config **CLI** Attributes


IOS Command Line Interface

```
!
!
!
!
interface GigabitEthernet0/0
 ip address 10.0.0.1 255.0.0.0
 duplex auto
 speed auto
!
interface GigabitEthernet0/1
 ip address 20.0.0.1 255.0.0.0
 duplex auto
 speed auto
!
interface GigabitEthernet0/2
 no ip address
 duplex auto
 speed auto
 shutdown
!
interface Vlan1
 no ip address
 shutdown
!
ip classless
ip route 30.0.0.0 255.0.0.0 20.0.0.2
ip route 172.19.0.0 255.255.0.0 20.0.0.2
ip route 21.0.0.0 255.0.0.0 20.0.0.2
ip route 15.0.0.0 255.0.0.0 20.0.0.2
ip route 192.168.168.0 255.255.255.0 20.0.0.2
ip route 162.14.0.0 255.255.0.0 20.0.0.2
!
ip flow-export version 9
!
--More--
```

Ctrl+F6 to exit CLI focus

Copy Pa

☐ Top

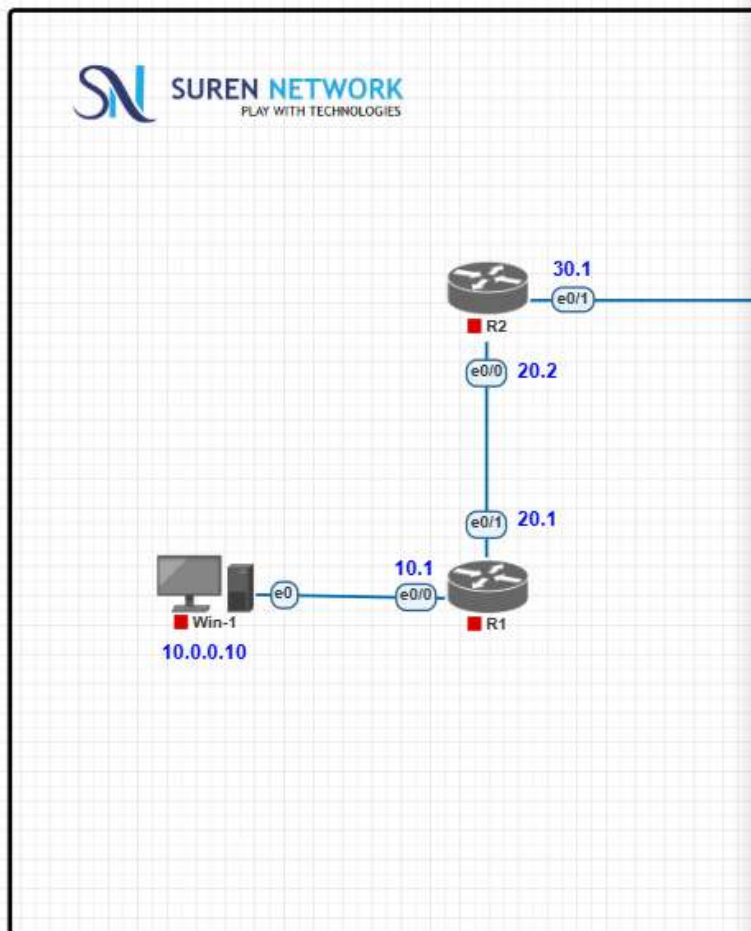

Router8

Physical Config **CLI** Attributes


IOS Command Line Interface

```
!
!
interface GigabitEthernet0/0
 ip address 20.0.0.2 255.0.0.0
 duplex auto
 speed auto
!
interface GigabitEthernet0/1
 ip address 30.0.0.1 255.0.0.0
 duplex auto
 speed auto
!
interface GigabitEthernet0/2
 no ip address
 duplex auto
 speed auto
 shutdown
!
interface Vlan1
 no ip address
 shutdown
!
ip classless
ip route 10.0.0.0 255.0.0.0 20.0.0.1
ip route 30.0.0.0 255.0.0.0 30.0.0.2
ip route 172.19.0.0 255.255.0.0 30.0.0.2
ip route 15.0.0.0 255.0.0.0 30.0.0.2
ip route 21.0.0.0 255.0.0.0 30.0.0.2
ip route 192.168.168.0 255.255.255.0 30.0.0.2
ip route 162.14.0.0 255.255.0.0 30.0.0.2
!
ip flow-export version 9
!
!
--More--
```

Ctrl+F6 to exit CLI focus

Copy Paste

☐ Top

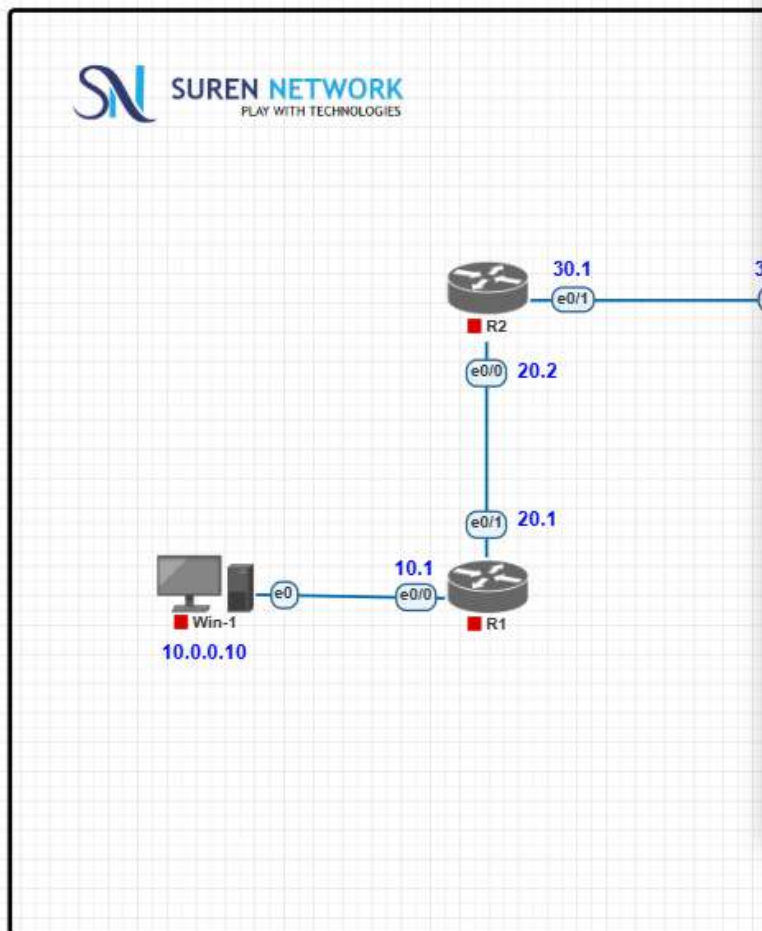

Router9

Physical Config **CLI** Attributes

IOS Command Line Interface

```
!
!
interface GigabitEthernet0/0
ip address 30.0.0.2 255.0.0.0
duplex auto
speed auto
!
interface GigabitEthernet0/1
ip address 172.19.0.1 255.255.0.0
duplex auto
speed auto
!
interface GigabitEthernet0/2
ip address 21.0.0.1 255.0.0.0
duplex auto
speed auto
!
interface Vlan1
no ip address
shutdown
!
ip classless
ip route 20.0.0.0 255.0.0.0 30.0.0.1
ip route 10.0.0.0 255.0.0.0 30.0.0.1
ip route 15.0.0.0 255.0.0.0 172.19.0.2
ip route 192.168.168.0 255.255.255.0 21.0.0.2
ip route 192.168.169.0 255.255.255.0 21.0.0.2
ip route 162.14.0.0 255.255.0.0 21.0.0.2
!
ip flow-export version 9
!
!
```


Ctrl+F6 to exit CLI focus

Copy Paste

☐ Top

Physical 162.14.0.10

01 : 00 : 00 START

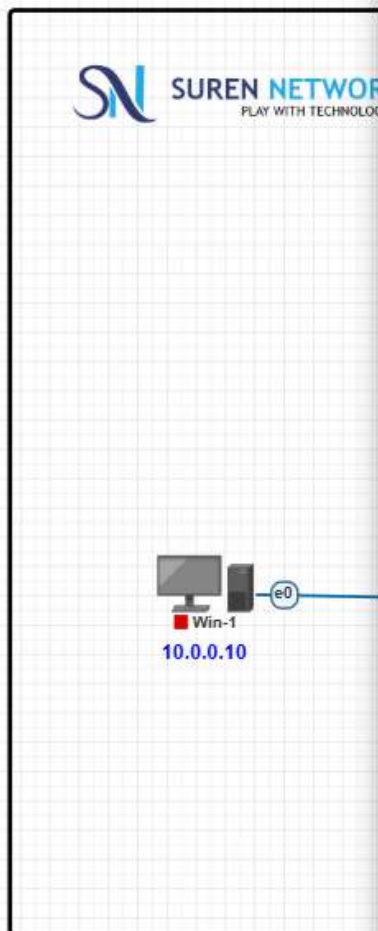

Router10


Physical Config CLI Attributes


IOS Command Line Interface

```
!
!
!
interface GigabitEthernet0/0
ip address 21.0.0.2 255.0.0.0
duplex auto
speed auto
!
interface GigabitEthernet0/1
ip address 192.168.168.1 255.255.255.0
duplex auto
speed auto
!
interface GigabitEthernet0/2
no ip address
duplex auto
speed auto
shutdown
!
interface Vlan1
no ip address
shutdown
!
ip classless
ip route 162.14.0.0 255.255.0.0 192.168.168.2
ip route 172.19.0.0 255.255.0.0 21.0.0.1
ip route 30.0.0.0 255.0.0.0 21.0.0.1
ip route 15.0.0.0 255.0.0.0 21.0.0.1
ip route 20.0.0.0 255.0.0.0 21.0.0.1
ip route 10.0.0.0 255.0.0.0 21.0.0.1
!
ip flow-export version 9
!
!
--More--
```

Ctrl+F6 to exit CLI focus

Copy Paste

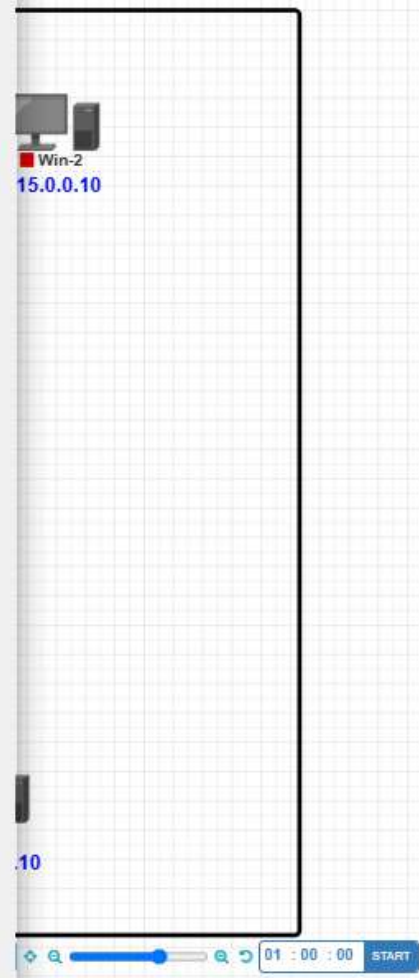

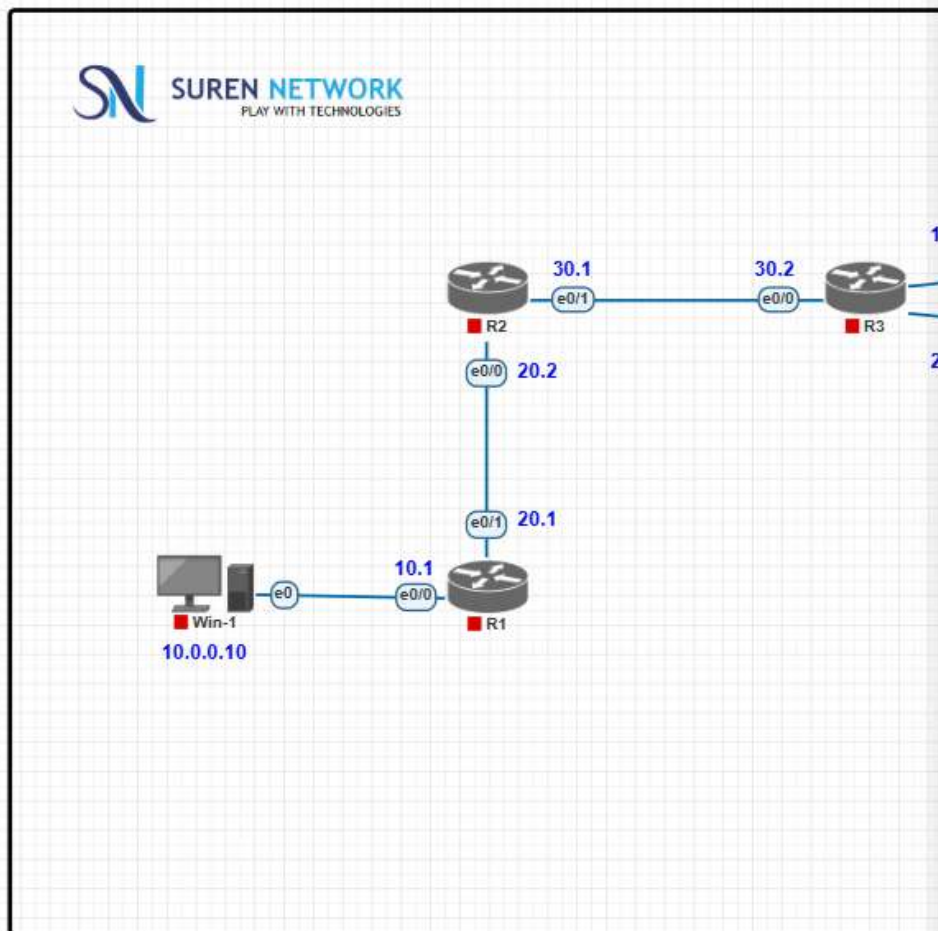

Router1


Physical Config **CLI** Attributes

IOS Command Line Interface

```
!
!
!
interface GigabitEthernet0/0
ip address 15.0.0.1 255.0.0.0
duplex auto
speed auto
!
interface GigabitEthernet0/1
ip address 172.19.0.2 255.255.0.0
duplex auto
speed auto
!
interface GigabitEthernet0/2
no ip address
duplex auto
speed auto
shutdown
!
interface Vlan1
no ip address
shutdown
!
ip classless
ip route 30.0.0.0 255.0.0.0 172.19.0.1
ip route 21.0.0.0 255.0.0.0 172.19.0.1
ip route 10.0.0.0 255.0.0.0 172.19.0.1
ip route 20.0.0.0 255.0.0.0 172.19.0.1
ip route 192.168.168.0 255.255.255.0 172.19.0.1
ip route 162.14.0.0 255.255.0.0 172.19.0.1
!
ip flow-export version 9
!
!
--More--
```

Ctrl+F6 to exit CLI focus

Copy

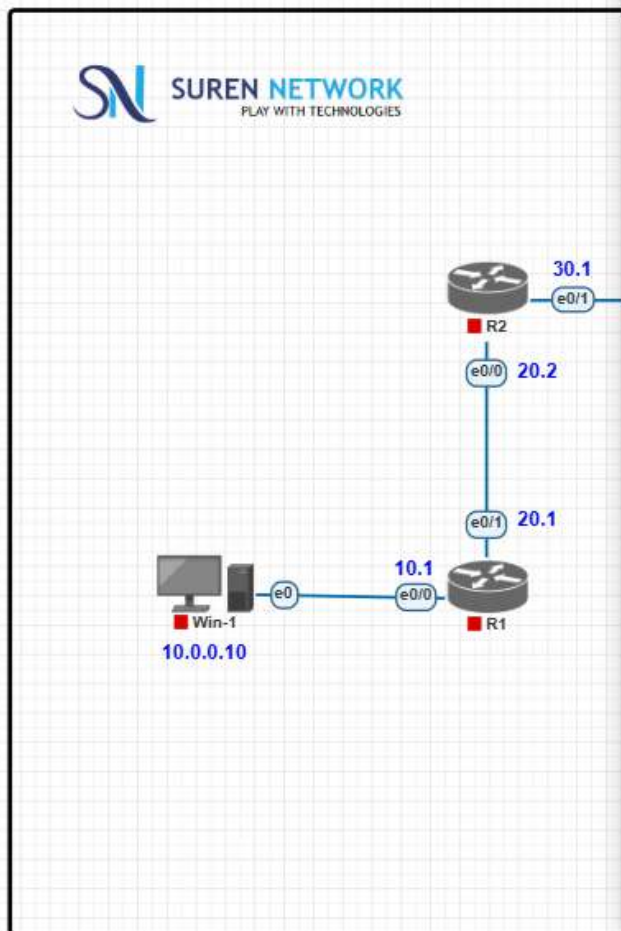

Router12

Physical Config CLI Attributes

IOS Command Line Interface

```
!
!
interface GigabitEthernet0/0
 ip address 162.14.0.1 255.255.0.0
 duplex auto
 speed auto
!
interface GigabitEthernet0/1
 ip address 192.168.168.2 255.255.255.0
 duplex auto
 speed auto
!
interface GigabitEthernet0/2
 no ip address
 duplex auto
 speed auto
 shutdown
!
interface Vlan1
 no ip address
 shutdown
!
ip classless
 ip route 21.0.0.0 255.0.0.0 192.168.168.1
 ip route 30.0.0.0 255.0.0.0 192.168.168.1
 ip route 15.0.0.0 255.0.0.0 192.168.168.1
 ip route 20.0.0.0 255.0.0.0 192.168.168.1
 ip route 10.0.0.0 255.0.0.0 192.168.168.1
 ip route 172.19.0.0 255.255.0.0 192.168.168.1
!
ip flow-export version 9
!
!
!
--More--
```


Ctrl+F6 to exit CLI focus

☐ Top

Copy Paste



Logical Physical :: 904, y: 91

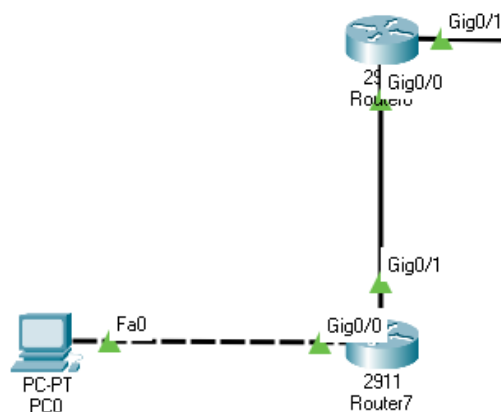

Time: 02:51:15



Copper Straight-Through

PC1
Physical Config Desktop Programming Attributes

Command Prompt

```

Minimum = 0ms, Maximum = 16ms, Average = 8ms

Control-C
^C
C:\>ping 21.0.0.1

Pinging 21.0.0.1 with 32 bytes of data:

Reply from 21.0.0.1: bytes=32 time<1ms TTL=254
Reply from 21.0.0.1: bytes=32 time<1ms TTL=254
Reply from 21.0.0.1: bytes=32 time<1ms TTL=254
Reply from 21.0.0.1: bytes=32 time<1ms TTL=254

Ping statistics for 21.0.0.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>
C:\>
C:\>
C:\>
C:\>ping 10.0.0.10

Pinging 10.0.0.10 with 32 bytes of data:

Reply from 10.0.0.10: bytes=32 time<1ms TTL=124
Reply from 10.0.0.10: bytes=32 time=11ms TTL=124
Reply from 10.0.0.10: bytes=32 time=10ms TTL=124
Reply from 10.0.0.10: bytes=32 time=12ms TTL=124

Ping statistics for 10.0.0.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 12ms, Average = 8ms

C:\>
  
```

☐ Top

New

Delete


Toggle PDU List Window

Simulation

Periodic Num Edit Delet



Logical Physical x: 1064, y: 285

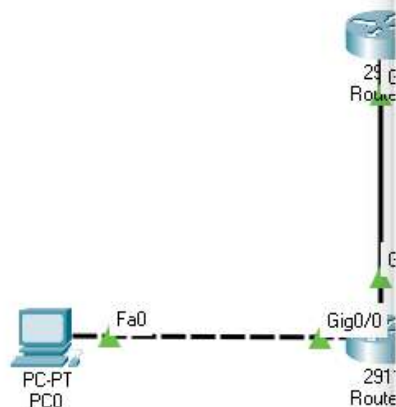

PC2

Physical Config Desktop Programming Attributes

Command Prompt

```
Packet Tracer PC Command Line 1.0
C:\>
C:\>
C:\>ping 10.0.0.10

Pinging 10.0.0.10 with 32 bytes of data:

Reply from 10.0.0.10: bytes=32 time<1ms TTL=123
Reply from 10.0.0.10: bytes=32 time=12ms TTL=123
Reply from 10.0.0.10: bytes=32 time=11ms TTL=123
Reply from 10.0.0.10: bytes=32 time=11ms TTL=123

Ping statistics for 10.0.0.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 12ms, Average = 8ms

C:\>ping 30.0.0.2


Pinging 30.0.0.2 with 32 bytes of data:

Reply from 30.0.0.2: bytes=32 time<1ms TTL=253
Reply from 30.0.0.2: bytes=32 time<1ms TTL=253
Reply from 30.0.0.2: bytes=32 time<1ms TTL=253
Reply from 30.0.0.2: bytes=32 time<1ms TTL=253

Ping statistics for 30.0.0.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>|
```

[Root] 20:34:00



Realtime Simulation

ination Type Color Time(sec) Periodic Num Edit Delete

New Delete

Toggle PDU List Window

Copper Straight-Through