

Architecture of OpenFlow-based failure avoidance for SAGE

Tomoya Furuichi*, Susumu Date*, Hirotake Abe*, Kohei Ichikawa*,
Hiroaki Yamanaka†, Eiji Kawai† and Haruo Takemura*

*Osaka University, Japan

†National Institute of Information and Communications Technology, Japan

Scientific data has been increasingly growing in size and complexity and therefore visualization technology has started to take a role of more importance. Tiled Display Wall (TDW, Fig.1), which is a single large display device composed of multiple sets of computers and displays, is such visualization technology. In particular, SAGE (Scalable Adaptive Graphics Environment) -based TDW allows scientists to display multiple series of scientific data, each of which might be located on a different site.



Fig.1 Tiled Display Wall

Problem

SAGE has a vulnerability to network failures. Specifically, if a network failure occurs on a network link between visualization application and display nodes, visualization on TDW partly stops (Fig.2).

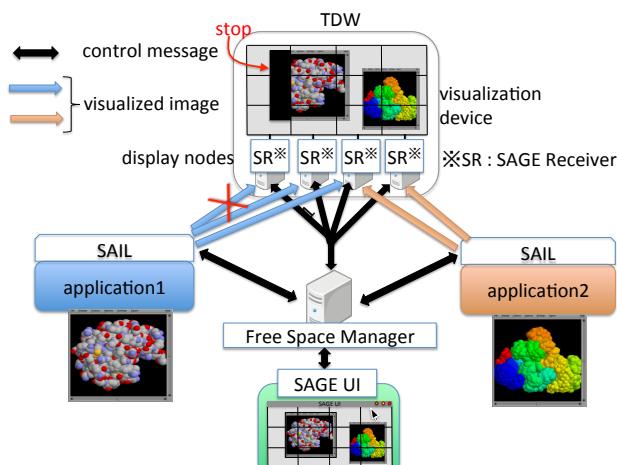


Fig.2 Network vulnerability in SAGE

Proposal

We propose a SAGE functionality that dynamically detects and avoids a network failure on a network link using OpenFlow, which allows to control network dynamically. The OpenFlow-based network failure avoidance functionality is composed of three functions.

- **Network failure detection function** detects the network failure between a visualization application and a display node.
- **Topology understanding function** grasps the network topology which OpenFlow Switches form.
- **Packet forwarding configuration function** discovers an alternate route and configures rules to OpenFlow Switches so that packets pass along the route.

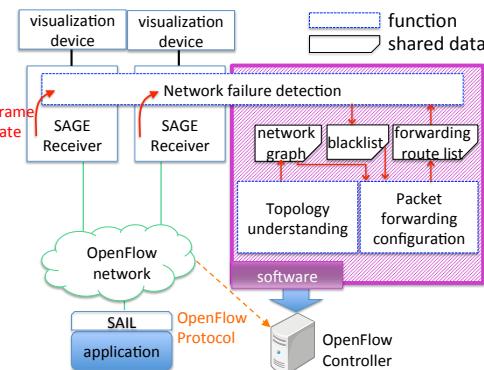


Fig.3 Proposed functionality

Experiment

Environment: The experimental environment was set up so that visualized data generated on visualization application for display node 1 pass link A, and visualized data for display node 2 pass link B.

Method:

1. disconnect link A.
2. monitor the frame rate (fps) of the display node 1.

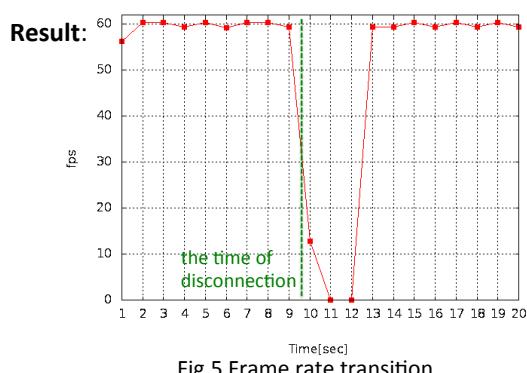


Fig.5 Frame rate transition

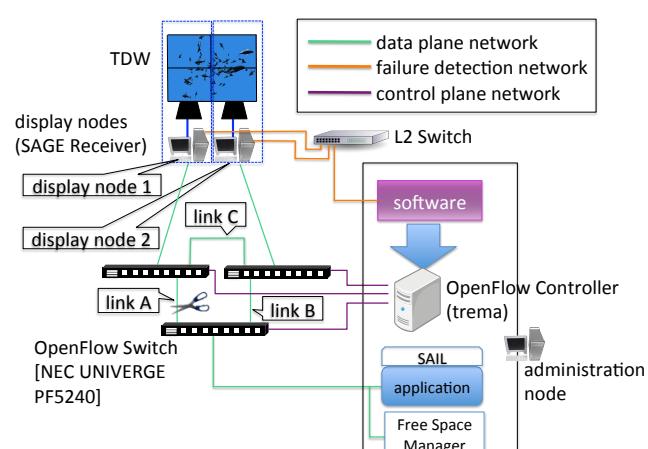


Fig.4 Experimental environment

Contact : Tomoya FURUICHI

E-mail : furuichi.tomoya@lab.ime.cmc.osaka-u.ac.jp