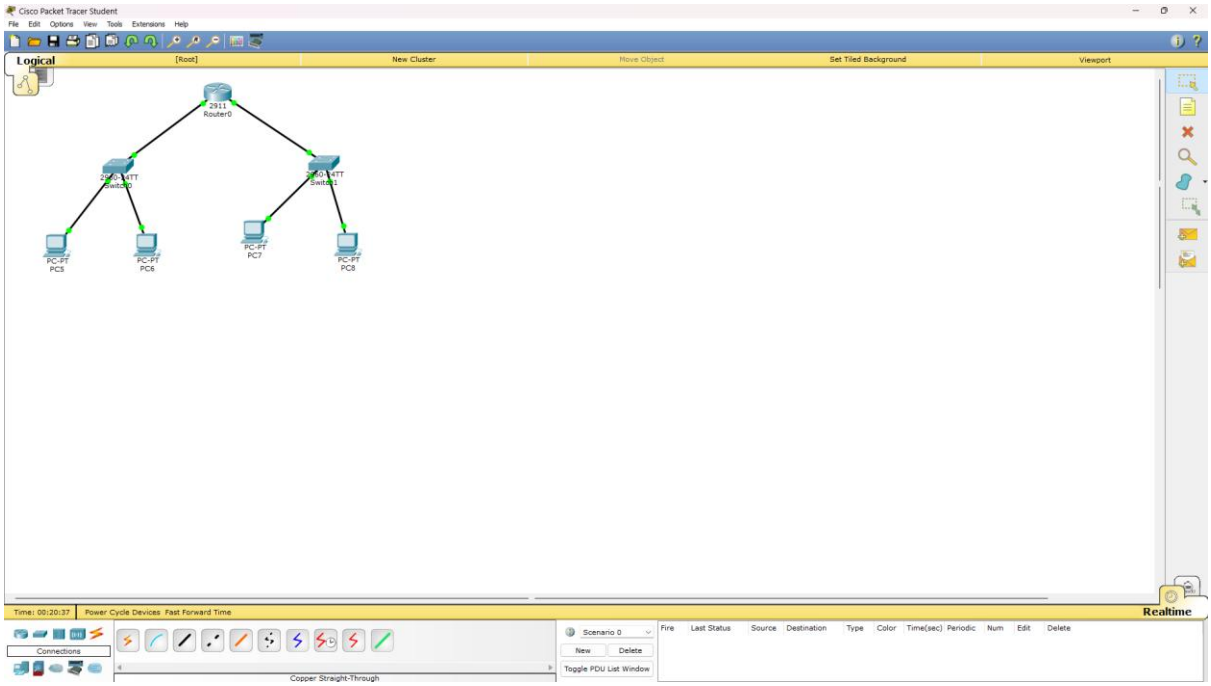
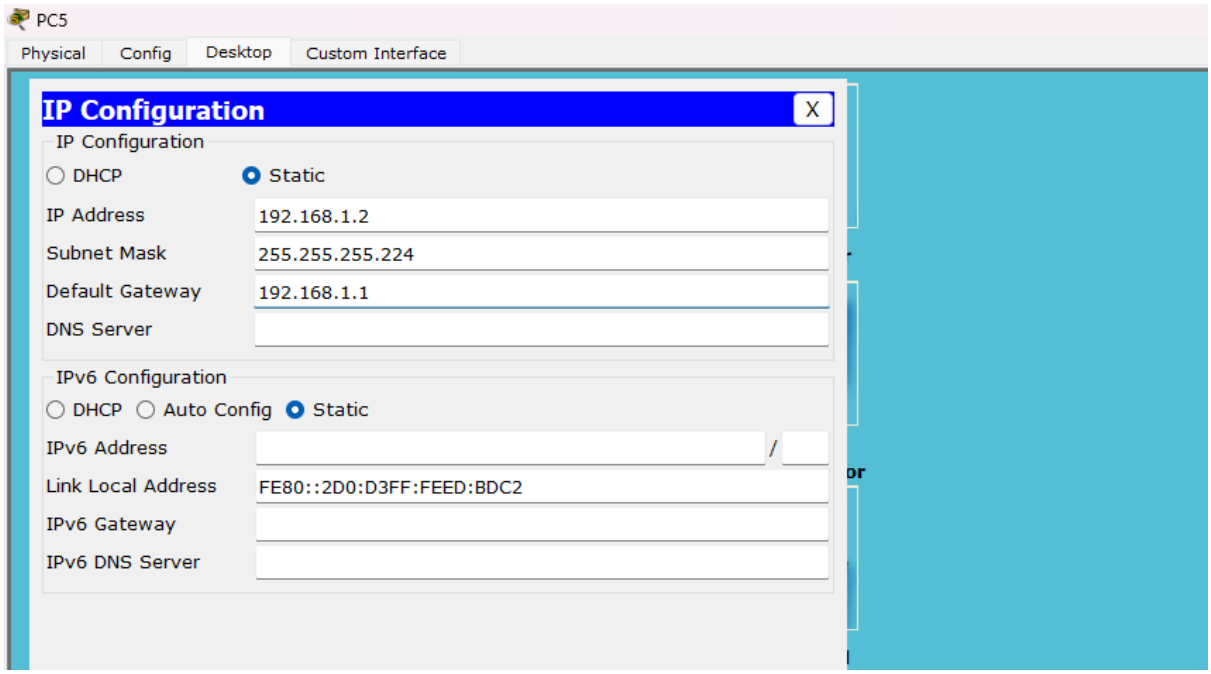
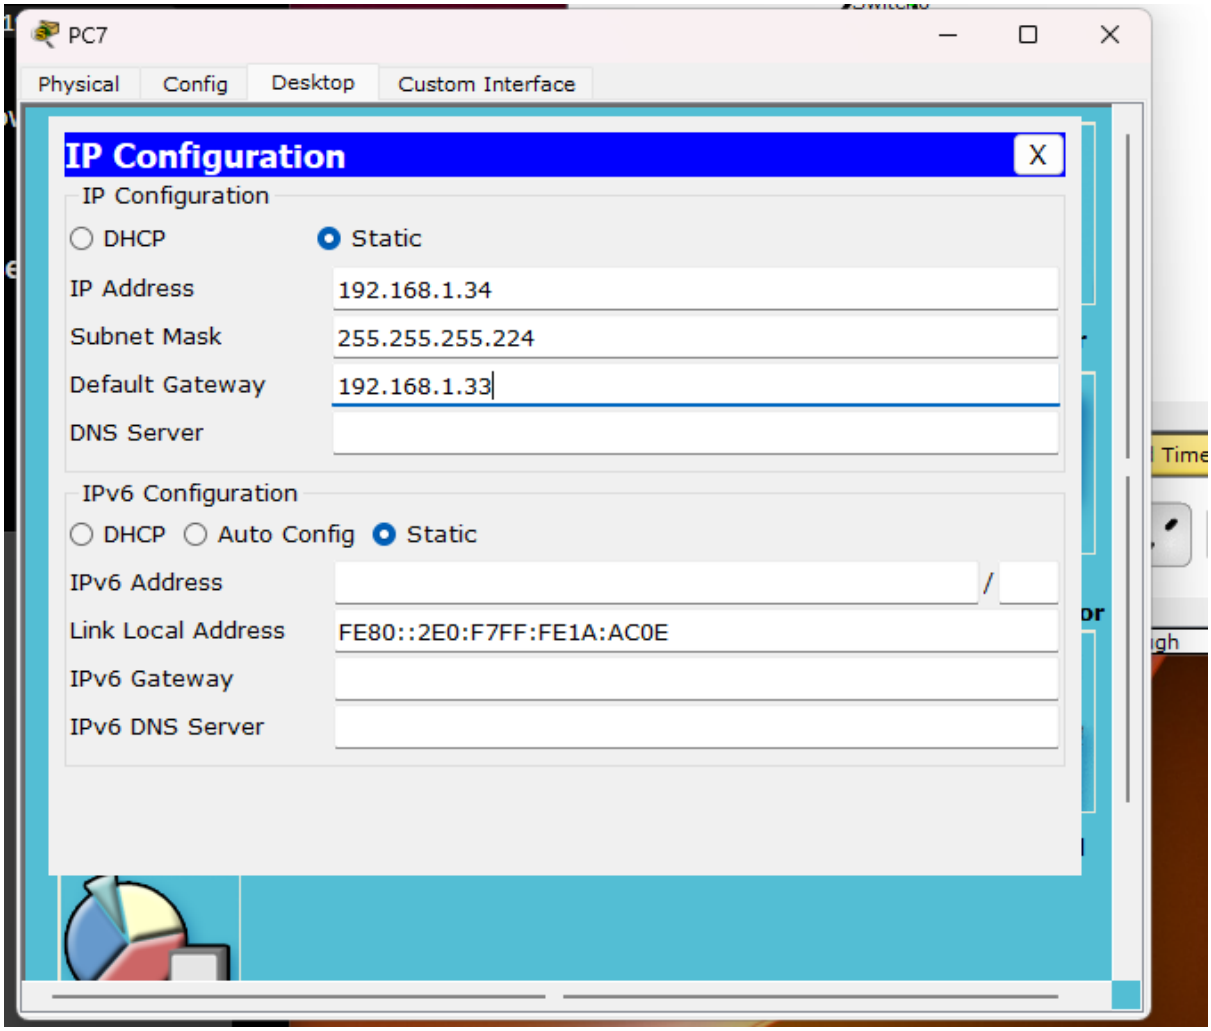

Cisco Packet Tracer Student
Logical
[Root]
New Cluster
Move Object
Set Tiled Background
Viewport
2911
Router0
PC-PT
PC5
PC-PT
PC6
PC-PT
PC7
PC-PT
PC8
Time: 00:20:37
Power Cycle Devices
Fast Forward Time
Realtime
Connections
Copper Straight-Through
Scenario 0
New
Delete
Toggle PDU List Window
Fire
Last Status
Source
Destination
Type
Color
Time(sec)
Periodic
Num
Edit
Delete


PC5
Physical
Config
Desktop
Custom Interface
IP Configuration
X
IP Configuration
DHCP
Static
IP Address
192.168.1.2
Subnet Mask
255.255.255.224
Default Gateway
192.168.1.1
DNS Server
IPv6 Configuration
DHCP
Auto Config
Static
IPv6 Address
/
Link Local Address
FE80::2D0:D3FF:FEED:BDC2
IPv6 Gateway
IPv6 DNS Server


PC7
Physical
Config
Desktop
Custom Interface
IP Configuration
X
IP Configuration
DHCP
Static
IP Address
192.168.1.34
Subnet Mask
255.255.255.224
Default Gateway
192.168.1.33
DNS Server
IPv6 Configuration
DHCP
Auto Config
Static
IPv6 Address
Link Local Address
FE80::2E0:F7FF:FE1A:AC0E
IPv6 Gateway
IPv6 DNS Server

```
Router>enable
Router#configure terminal
Enter configuration commands, one per line.  End with CNTL/Z.
Router(config)#interface GigabitEthernet 0/0
Router(config-if)#ip address 192.168.1.1 255.255.255.224
Router(config-if)#no shutdown
Router(config-if)#exit
Router(config)#interface GigabitEthernet 0/1
Router(config-if)#ip address 192.168.1.33 255.255.255.224
Router(config-if)#no shutdown
Router(config-if)#end
Router#
%SYS-5-CONFIG_I: Configured from console by console
show ip interface bried
                          ^
% Invalid input detected at '^' marker.


Router#show ip interface brief
Interface              IP-Address      OK? Method Status                Protocol


GigabitEthernet0/0     192.168.1.1     YES manual up                    up


GigabitEthernet0/1     192.168.1.33    YES manual up                    up


GigabitEthernet0/2     unassigned      YES unset  administratively down down

Vlan1                  unassigned      YES unset  administratively down down
Router#
```

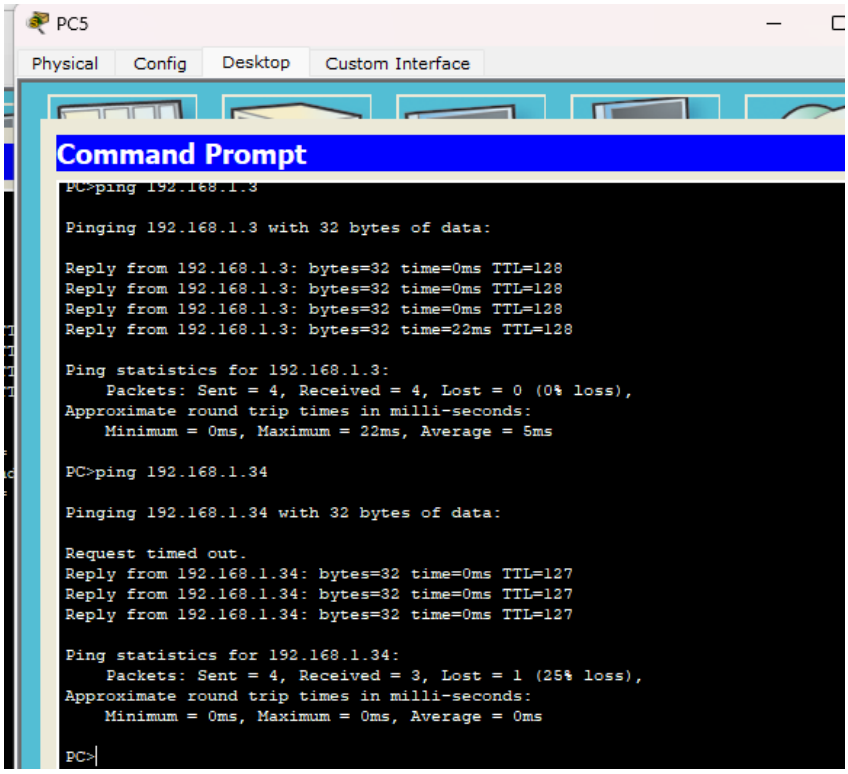

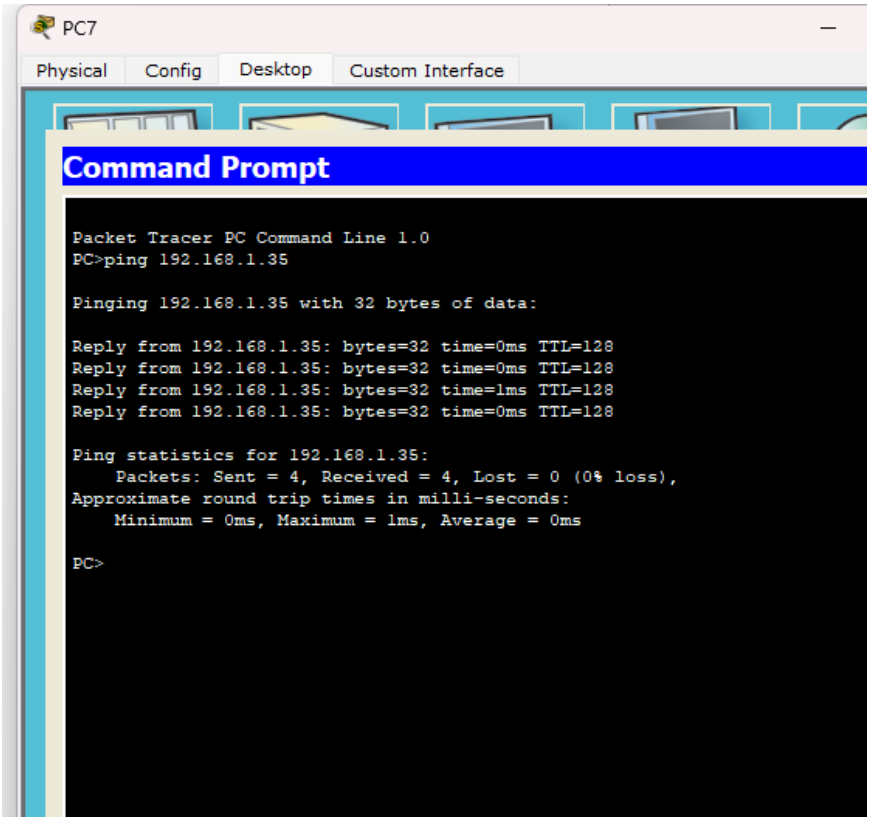
PC7
Physical
Config
Desktop
Custom Interface
Command Prompt
Packet Tracer PC Command Line 1.0
PC>ping 192.168.1.35
Pinging 192.168.1.35 with 32 bytes of data:
Reply from 192.168.1.35: bytes=32 time=0ms TTL=128
Reply from 192.168.1.35: bytes=32 time=0ms TTL=128
Reply from 192.168.1.35: bytes=32 time=1ms TTL=128
Reply from 192.168.1.35: bytes=32 time=0ms TTL=128
Ping statistics for 192.168.1.35:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 1ms, Average = 0ms
PC>

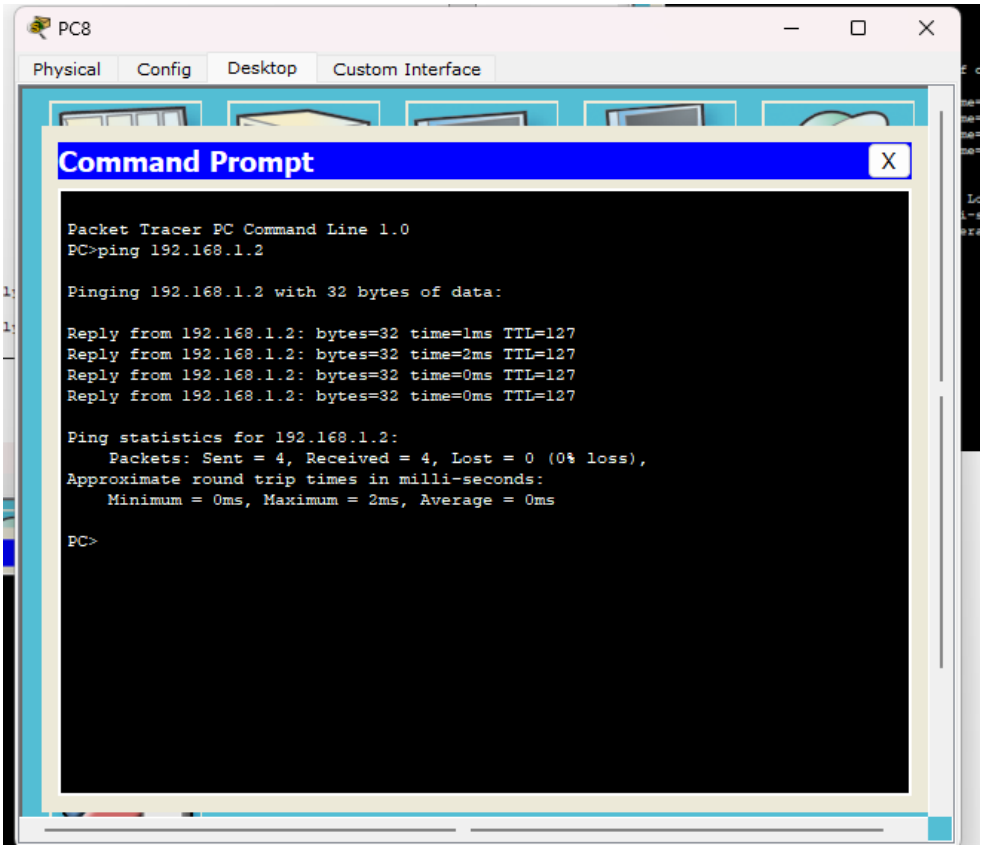
PC8
Physical
Config
Desktop
Custom Interface
Command Prompt
X
Packet Tracer PC Command Line 1.0
PC>ping 192.168.1.2
Pinging 192.168.1.2 with 32 bytes of data:
Reply from 192.168.1.2: bytes=32 time=1ms TTL=127
Reply from 192.168.1.2: bytes=32 time=2ms TTL=127
Reply from 192.168.1.2: bytes=32 time=0ms TTL=127
Reply from 192.168.1.2: bytes=32 time=0ms TTL=127
Ping statistics for 192.168.1.2:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 2ms, Average = 0ms
PC>

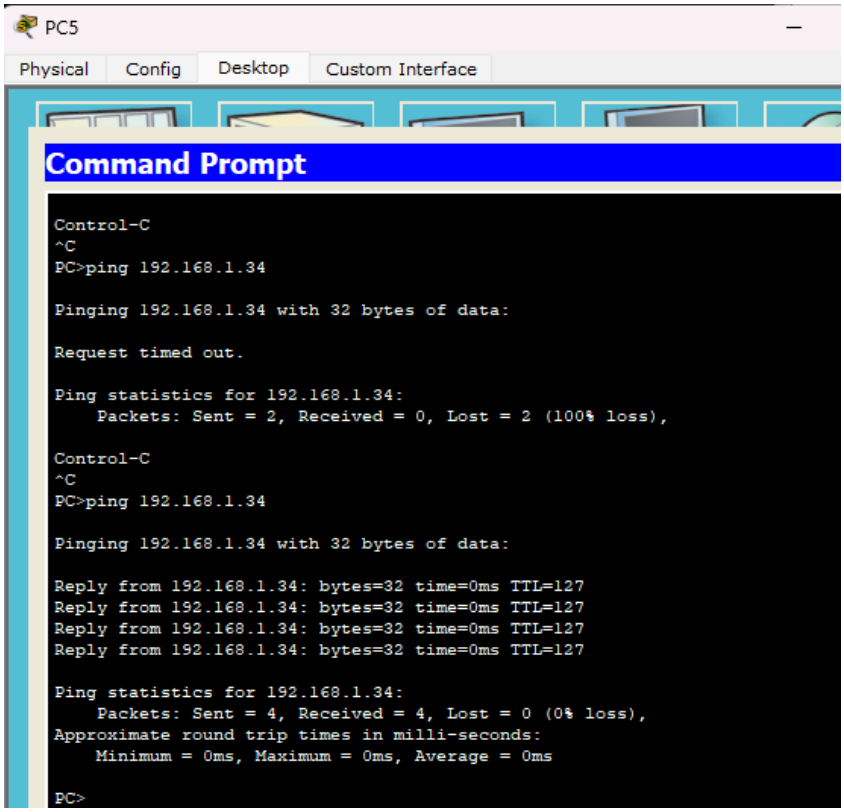
PC5
Physical
Config
Desktop
Custom Interface
Command Prompt
Control-C
^C
PC>ping 192.168.1.34
Pinging 192.168.1.34 with 32 bytes of data:
Request timed out.
Ping statistics for 192.168.1.34:
Packets: Sent = 2, Received = 0, Lost = 2 (100% loss),
Control-C
^C
PC>ping 192.168.1.34
Pinging 192.168.1.34 with 32 bytes of data:
Reply from 192.168.1.34: bytes=32 time=0ms TTL=127
Reply from 192.168.1.34: bytes=32 time=0ms TTL=127
Reply from 192.168.1.34: bytes=32 time=0ms TTL=127
Reply from 192.168.1.34: bytes=32 time=0ms TTL=127
Ping statistics for 192.168.1.34:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 0ms, Average = 0ms
PC>