


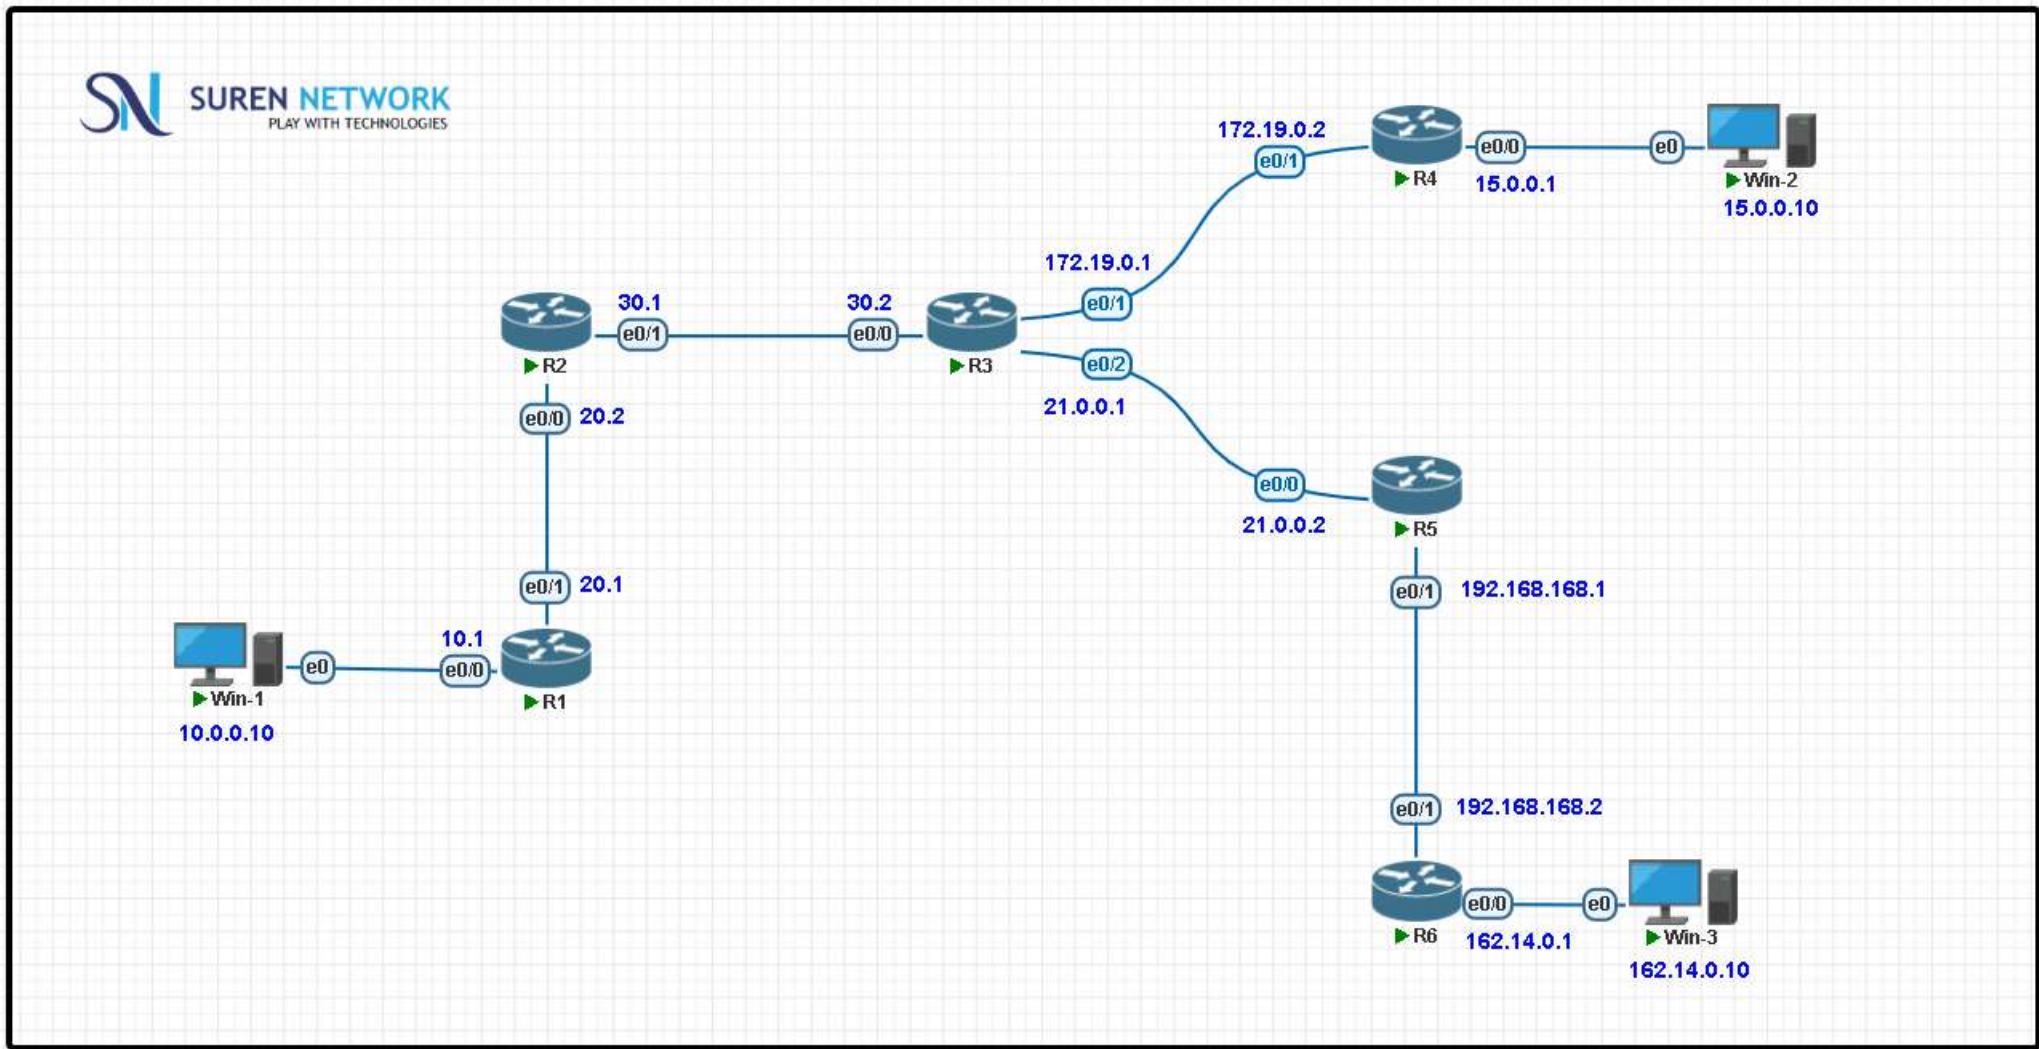

PNETLab | Topology

labs.surennetwork.com/legacy/topology

Apps

PNETLab | Lab is Si...

Suren Network | Lea...

Ask Gemini

SN Static Login

Notifications

All Bookmarks

R1

D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2
i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
ia - IS-IS inter area, * - candidate default, U - per-user static route
o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
a - application route
+ - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

S 10.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C 10.0.0.0/8 is directly connected, Ethernet0/0
L 10.0.0.1/32 is directly connected, Ethernet0/0
S 15.0.0.0/8 [1/0] via 20.0.0.2
C 20.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C 20.0.0.0/8 is directly connected, Ethernet0/1
L 20.0.0.1/32 is directly connected, Ethernet0/1
S 21.0.0.0/8 [1/0] via 20.0.0.2
S 30.0.0.0/8 [1/0] via 20.0.0.2
S 162.14.0.0/16 [1/0] via 20.0.0.2
S 172.19.0.0/16 [1/0] via 20.0.0.2
S 192.168.168.0/24 [1/0] via 20.0.0.2

R1#

R2

D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2
i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
ia - IS-IS inter area, * - candidate default, U - per-user static route
o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
a - application route
+ - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

S 10.0.0.0/8 [1/0] via 20.0.0.1
S 15.0.0.0/8 [1/0] via 30.0.0.2
C 20.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C 20.0.0.0/8 is directly connected, Ethernet0/0
L 20.0.0.2/32 is directly connected, Ethernet0/0
S 21.0.0.0/8 [1/0] via 30.0.0.2
C 30.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C 30.0.0.0/8 is directly connected, Ethernet0/1
L 30.0.0.1/32 is directly connected, Ethernet0/1
S 162.14.0.0/16 [1/0] via 30.0.0.2
S 172.19.0.0/16 [1/0] via 30.0.0.2
S 192.168.168.0/24 [1/0] via 30.0.0.2

R2#

R3

ia - IS-IS inter area, * - candidate default, U - per-user static route
o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
a - application route
+ - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

S 10.0.0.0/8 [1/0] via 30.0.0.1
S 15.0.0.0/8 [1/0] via 172.19.0.2
S 20.0.0.0/8 [1/0] via 30.0.0.1
C 21.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C 21.0.0.0/8 is directly connected, Ethernet0/2
L 21.0.0.1/32 is directly connected, Ethernet0/2
C 30.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C 30.0.0.0/8 is directly connected, Ethernet0/0
L 30.0.0.2/32 is directly connected, Ethernet0/0
C 162.14.0.0/16 is variably subnetted, 2 subnets, 2 masks
S 162.14.0.0/16 [1/0] via 21.0.0.2
S 162.14.0.0/24 [1/0] via 21.0.0.2
C 172.19.0.0/16 is variably subnetted, 2 subnets, 2 masks
L 172.19.0.1/32 is directly connected, Ethernet0/1
S 192.168.168.0/24 [1/0] via 21.0.0.2

R3#

Physical

01 : 00 : 00

START

R5#

R4#

R6#

```
C:\WINDOWS\system32\cmd.exe
Microsoft Windows XP [Version 5.1.2600]
(C) Copyright 1985-2001 Microsoft Corp.

C:\Documents and Settings\user>ipconfig

Windows IP Configuration

Ethernet adapter Local Area Connection:

    Connection-specific DNS Suffix  . : 
    IP Address . . . . . : 10.0.0.10
    Subnet Mask . . . . . : 255.0.0.0
    Default Gateway . . . . . : 10.0.0.1

C:\Documents and Settings\user>ping 15.0.0.10

Pinging 15.0.0.10 with 32 bytes of data:

Reply from 15.0.0.10: bytes=32 time=4ms TTL=124
Reply from 15.0.0.10: bytes=32 time=2ms TTL=124
Reply from 15.0.0.10: bytes=32 time=2ms TTL=124
Reply from 15.0.0.10: bytes=32 time=2ms TTL=124

Ping statistics for 15.0.0.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 2ms, Maximum = 4ms, Average = 2ms


C:\Documents and Settings\user>ping 162.14.0.10


Pinging 162.14.0.10 with 32 bytes of data:

Reply from 162.14.0.10: bytes=32 time=3ms TTL=123
Reply from 162.14.0.10: bytes=32 time=2ms TTL=123
Reply from 162.14.0.10: bytes=32 time=2ms TTL=123
Reply from 162.14.0.10: bytes=32 time=2ms TTL=123

Ping statistics for 162.14.0.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 2ms, Maximum = 3ms, Average = 2ms

C:\Documents and Settings\user>
```

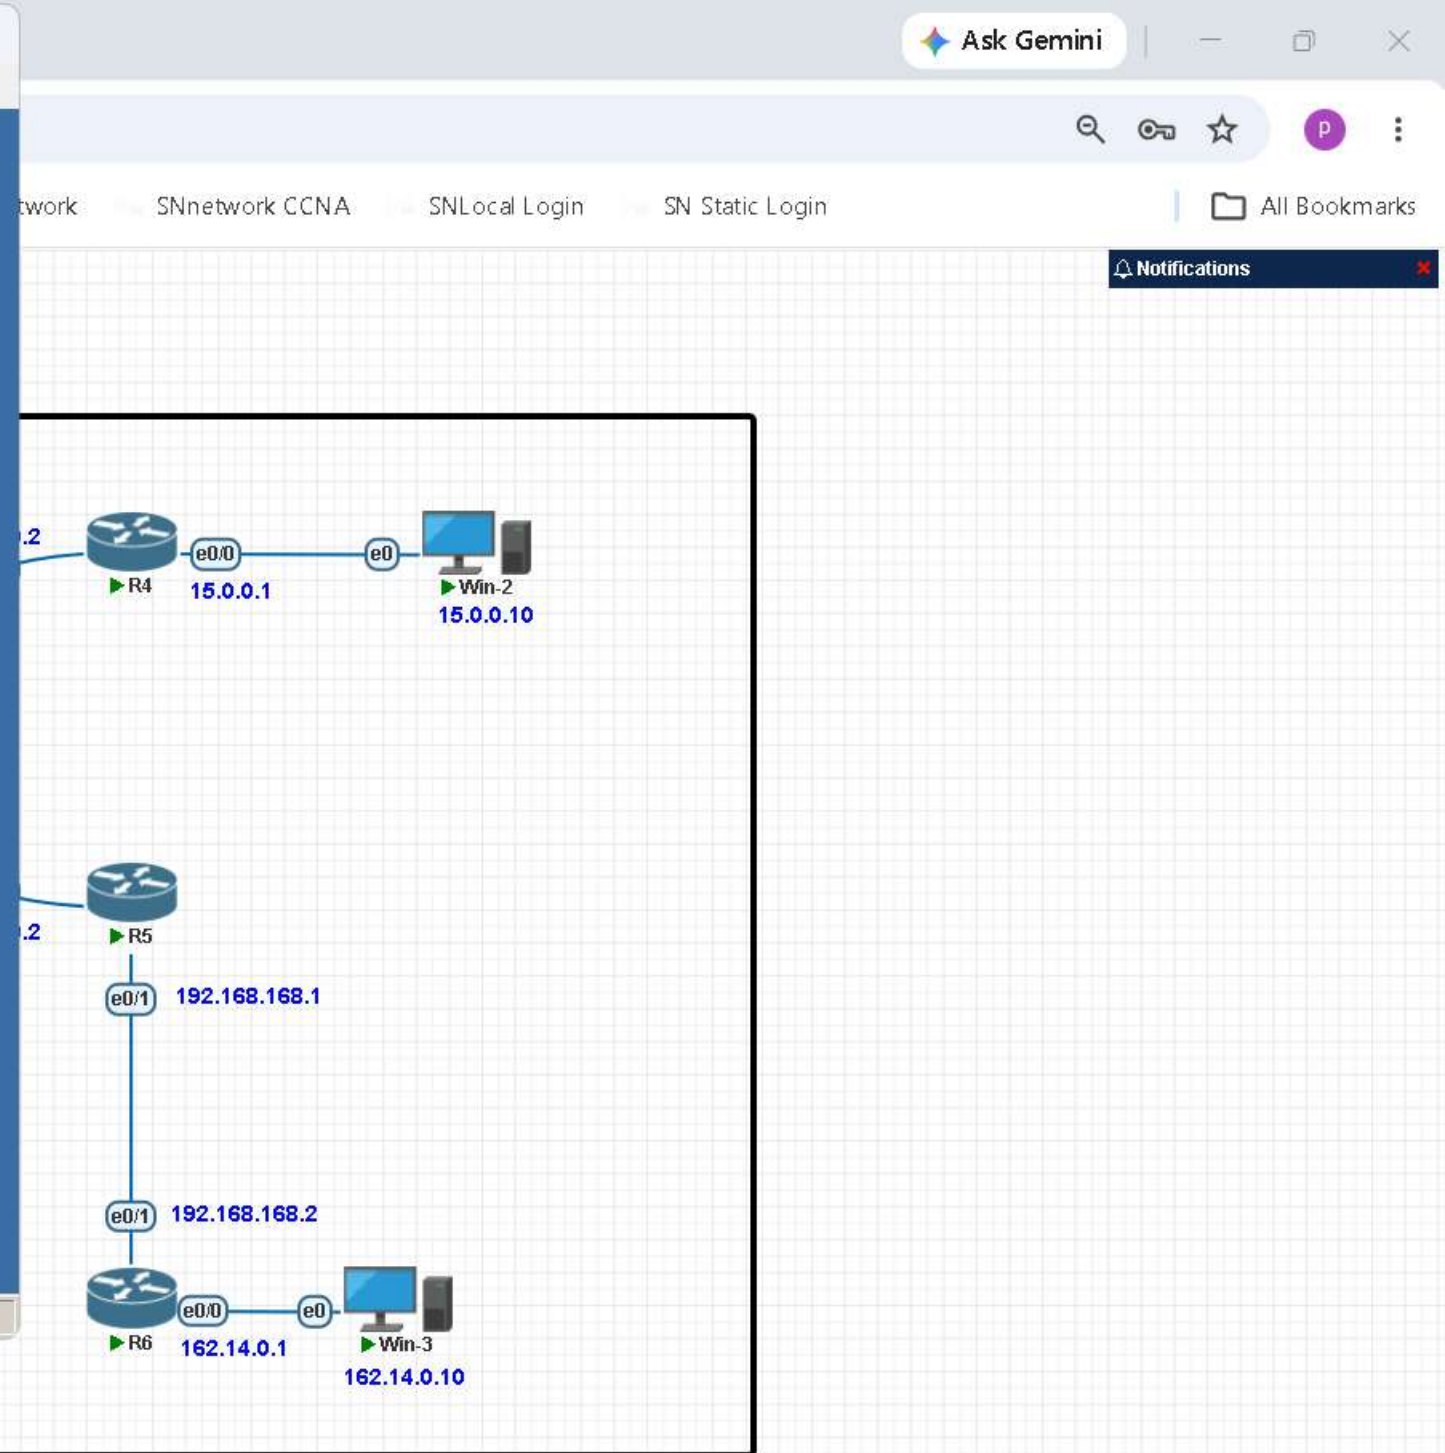

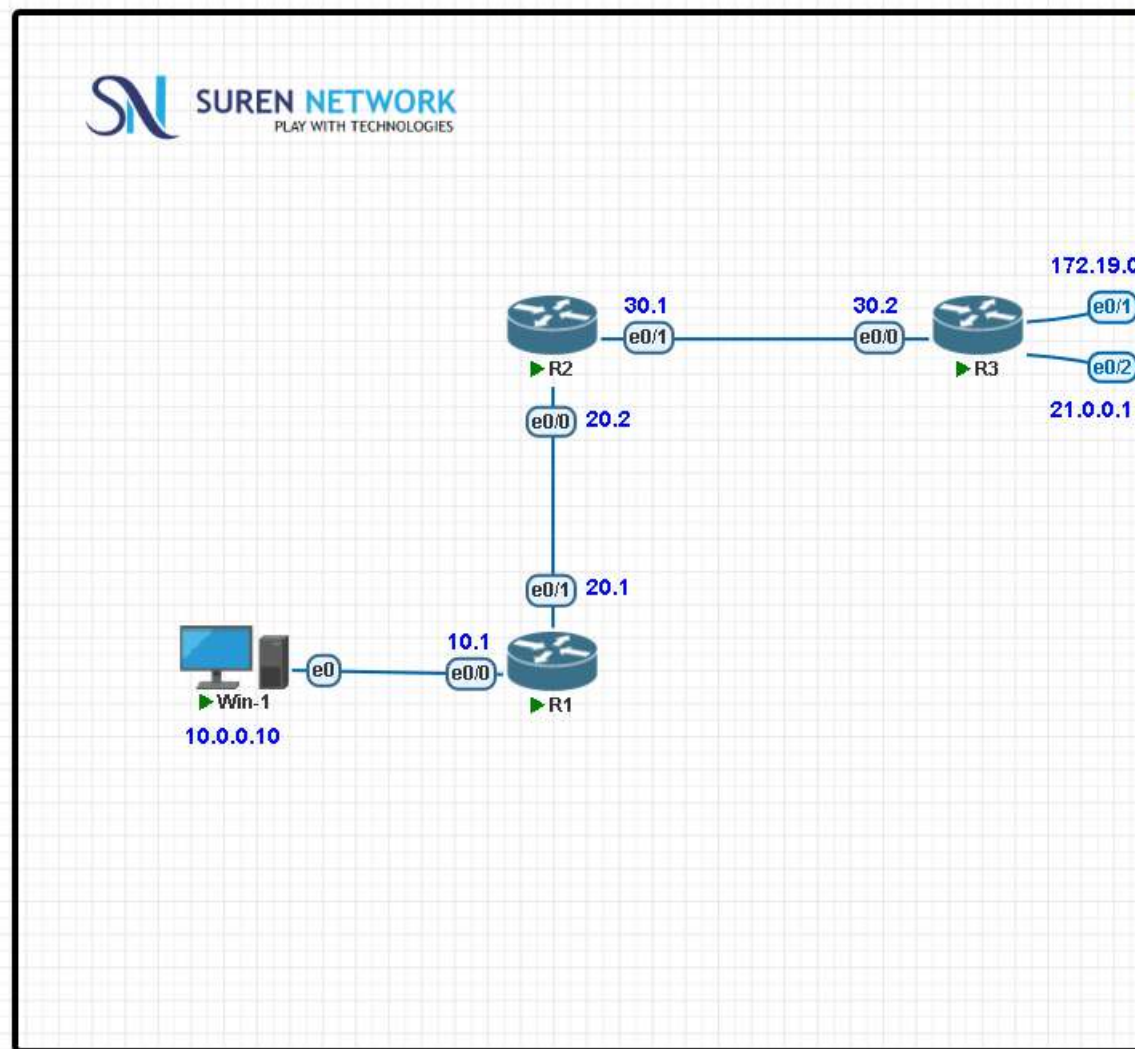

QEMU (Win-3)

```
C:\WINDOWS\system32\cmd.exe
Microsoft Windows XP [Version 5.1.2600]
(C) Copyright 1985-2001 Microsoft Corp.

C:\Documents and Settings\user>ncpa.cpl
C:\Documents and Settings\user>ip config
'ip' is not recognized as an internal or external command,
operable program or batch file.
C:\Documents and Settings\user>ipconfig
Windows IP Configuration

Ethernet adapter Local Area Connection:

    Connection-specific DNS Suffix  . : 
    IP Address. . . . . : 162.14.0.10
    Subnet Mask . . . . . : 255.255.0.0
    Default Gateway . . . . . : 162.14.0.1

C:\Documents and Settings\user>ping 10.0.0.10
Pinging 10.0.0.10 with 32 bytes of data:

Reply from 10.0.0.10: bytes=32 time=3ms TTL=123
Reply from 10.0.0.10: bytes=32 time=2ms TTL=123
Reply from 10.0.0.10: bytes=32 time=2ms TTL=123
Reply from 10.0.0.10: bytes=32 time=2ms TTL=123

Ping statistics for 10.0.0.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 2ms, Maximum = 3ms, Average = 2ms

C:\Documents and Settings\user>ping 15.0.0.10
Pinging 15.0.0.10 with 32 bytes of data:

Reply from 15.0.0.10: bytes=32 time=5ms TTL=124
Reply from 15.0.0.10: bytes=32 time=2ms TTL=124
Reply from 15.0.0.10: bytes=32 time=1ms TTL=124
Reply from 15.0.0.10: bytes=32 time=2ms TTL=124

Ping statistics for 15.0.0.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 1ms, Maximum = 5ms, Average = 2ms

C:\Documents and Settings\user>
```