



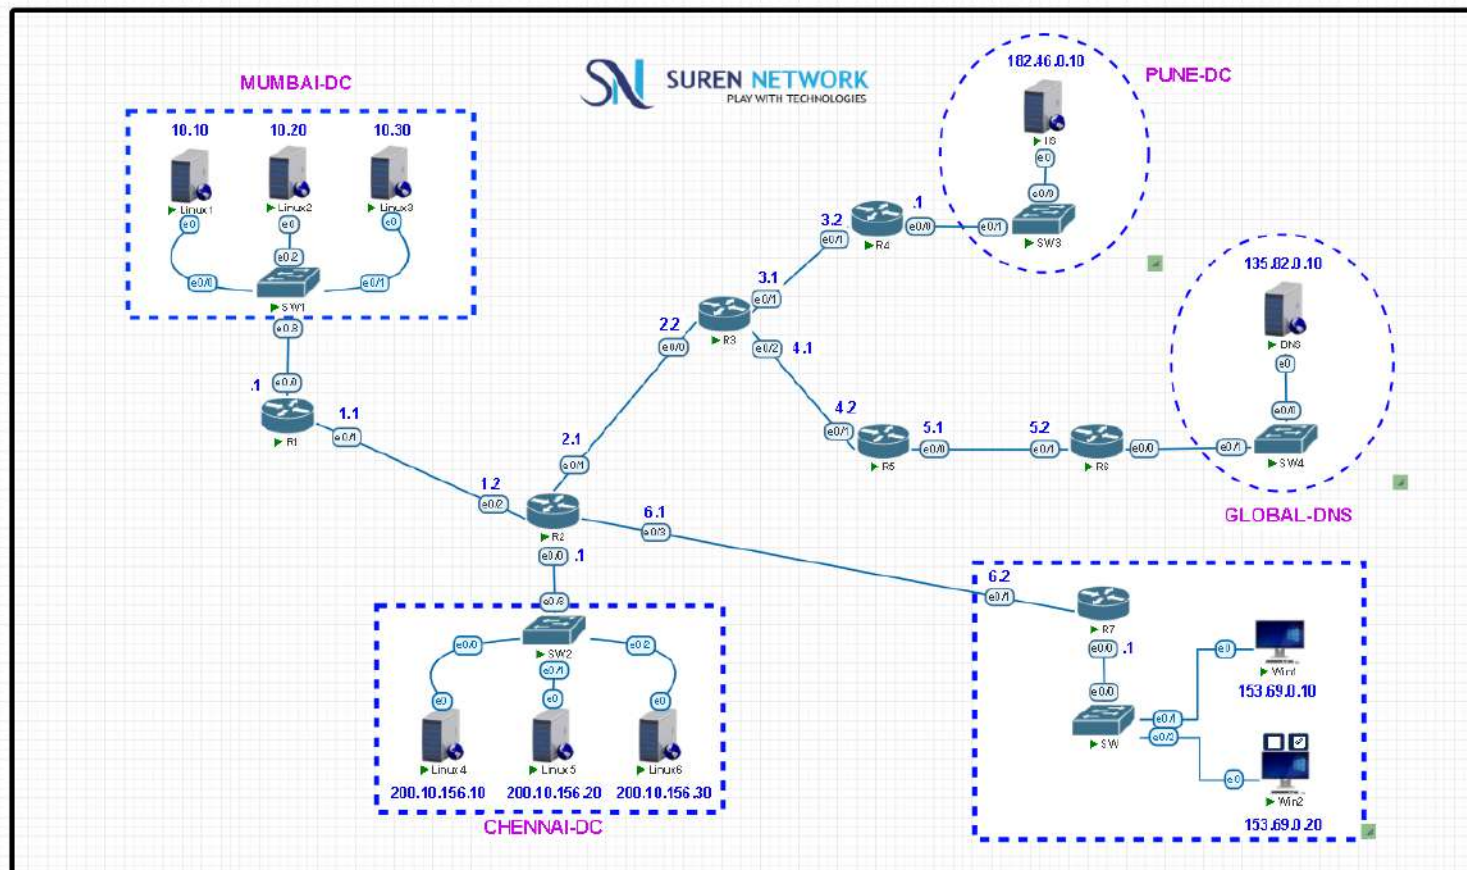

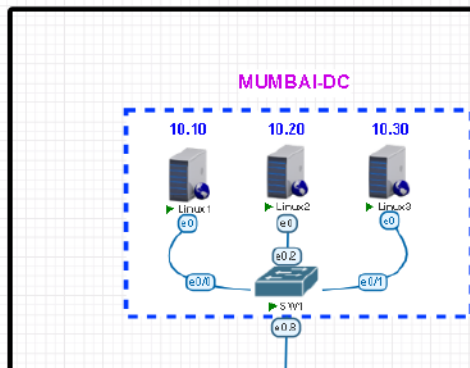

```

R5#
i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
ia - IS-IS inter area, * - candidate default, U - per-user static route
o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
a - application route
+ - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

S   1.0.0.0/8 [1/0] via 4.0.0.1
S   2.0.0.0/8 [1/0] via 4.0.0.1
S   3.0.0.0/8 [1/0] via 4.0.0.1
C   4.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
L   4.0.0.0/8 is directly connected, Ethernet0/1
L   4.0.0.2/32 is directly connected, Ethernet0/1
C   5.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
L   5.0.0.0/8 is directly connected, Ethernet0/0
L   5.0.0.1/32 is directly connected, Ethernet0/0
S   6.0.0.0/8 [1/0] via 4.0.0.1
S   10.0.0.0/8 [1/0] via 4.0.0.1
S   135.82.0.0/16 [1/0] via 5.0.0.2
S   153.69.0.0/16 [1/0] via 4.0.0.1
S   182.46.0.0/16 [1/0] via 4.0.0.1
S   200.10.156.0/24 [1/0] via 4.0.0.1
R5#

```

```

R6#
i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
ia - IS-IS inter area, * - candidate default, U - per-user static route
o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
a - application route
+ - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

S   1.0.0.0/8 [1/0] via 5.0.0.1
S   2.0.0.0/8 [1/0] via 5.0.0.1
S   3.0.0.0/8 [1/0] via 5.0.0.1
S   4.0.0.0/8 [1/0] via 5.0.0.1
C   5.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
L   5.0.0.0/8 is directly connected, Ethernet0/1
L   5.0.0.2/32 is directly connected, Ethernet0/1
S   6.0.0.0/8 [1/0] via 5.0.0.1
S   10.0.0.0/8 [1/0] via 5.0.0.1
C   135.82.0.0/16 is variably subnetted, 2 subnets, 2 masks
L   135.82.0.0/16 is directly connected, Ethernet0/0
L   135.82.0.1/32 is directly connected, Ethernet0/0
S   153.69.0.0/16 [1/0] via 5.0.0.1
S   182.46.0.0/16 [1/0] via 5.0.0.1
S   200.10.156.0/24 [1/0] via 5.0.0.1
R6#

```

```

R7#
S   3.0.0.0/8 [1/0] via 6.0.0.1
S   4.0.0.0/8 [1/0] via 6.0.0.1
S   5.0.0.0/8 [1/0] via 6.0.0.1
C   6.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
L   6.0.0.0/8 is directly connected, Ethernet0/1
L   6.0.0.2/32 is directly connected, Ethernet0/1
S   10.0.0.0/8 [1/0] via 6.0.0.1
S   135.82.0.0/16 [1/0] via 6.0.0.1
C   153.69.0.0/16 is variably subnetted, 2 subnets, 2 masks
L   153.69.0.0/16 is directly connected, Ethernet0/0
L   153.69.0.1/32 is directly connected, Ethernet0/0
S   182.46.0.0/16 [1/0] via 6.0.0.1
S   200.10.156.0/24 [1/0] via 6.0.0.1
R7#ping 10.0.0.0
Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 10.0.0.0, timeout is 2 seconds:
!!!!
Success rate is 100 percent (5/5), round-trip min/avg/max = 1/1/1 ms
R7#ping 135.82.0.1
Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 135.82.0.1, timeout is 2 seconds:
!!!!
Success rate is 100 percent (5/5), round-trip min/avg/max = 1/1/3 ms
R7#

```

QEMU (Linux1)

```
ENABLE=yes
NAME=Ethernet
IPADDRESS=10.0.0.10
CIDRLEN=8
NETWORK=10.0.0.0
NETMASK=255.0.0.0
GATEWAY=10.0.0.1
BROADCAST=10.255.255.255
DHCP=no
```

```
/etc/sysconfig/network-scripts/ifcfg-eth0 1/9 11%
```

QEMU (Linux2)

```
ENABLE=yes
NAME=Ethernet
IPADDRESS=10.0.0.20
CIDRLEN=8
NETWORK=10.0.0.0
NETMASK=255.0.0.0
GATEWAY=10.0.0.1
BROADCAST=10.255.255.255
DHCP=no
```

```
/etc/sysconfig/network-scripts/ifcfg-eth0 1/9 11%
```

QEMU (Linux3)

```
ENABLE=yes
NAME=Ethernet
IPADDRESS=10.0.0.30
CIDRLEN=8
NETWORK=10.0.0.0
NETMASK=255.0.0.0
GATEWAY=10.0.0.1
BROADCAST=10.255.255.255
DHCP=no
```

```
/etc/sysconfig/network-scripts/ifcfg-eth0 1/9 11%
```

QEMU (Linux4)

```
ENABLE=yes
NAME=Ethernet
IPADDRESS=200.10.156.10
CIDRLEN=24
NETWORK=200.10.156.0
NETMASK=255.255.255.0
GATEWAY=200.10.156.1
BROADCAST=200.255.255.255
DHCP=no
```

```
/etc/sysconfig/network-scripts/ifcfg-eth0 1/9 11%
```

QEMU (Linux5)

```
ENABLE=yes
NAME=Ethernet
IPADDRESS=200.10.156.20
CIDRLEN=24
NETWORK=200.10.156.0
NETMASK=255.255.255.0
GATEWAY=200.10.156.1
BROADCAST=200.10.156.255
DHCP=no
```

```
/etc/sysconfig/network-scripts/ifcfg-eth0 1/9 11%
```

QEMU (Linux6)

```
ENABLE=yes
NAME=Ethernet
IPADDRESS=200.10.156.30
CIDRLEN=24
NETWORK=200.10.156.0
NETMASK=255.255.255.0
GATEWAY=200.10.156.1
BROADCAST=200.10.156.255
DHCP=no
```

```
/etc/sysconfig/network-scripts/ifcfg-eth0 1/9 11%
```

Physical



00 : 00 : 00

START

 QEMU (Linux3)



```
Hello World!  
Welcome to Instagram
```

```
- /hone/tthttpd/index.html 1/2 50%
```

 QEMU (Linux6)

```
Hello World!  
Welcome to Gmail
```

```
└─ /home/thttpd/index.html 1/2 50%
```

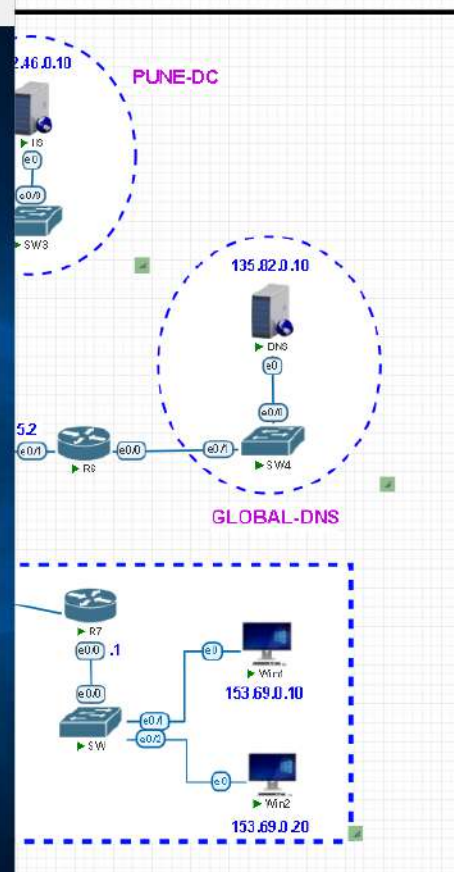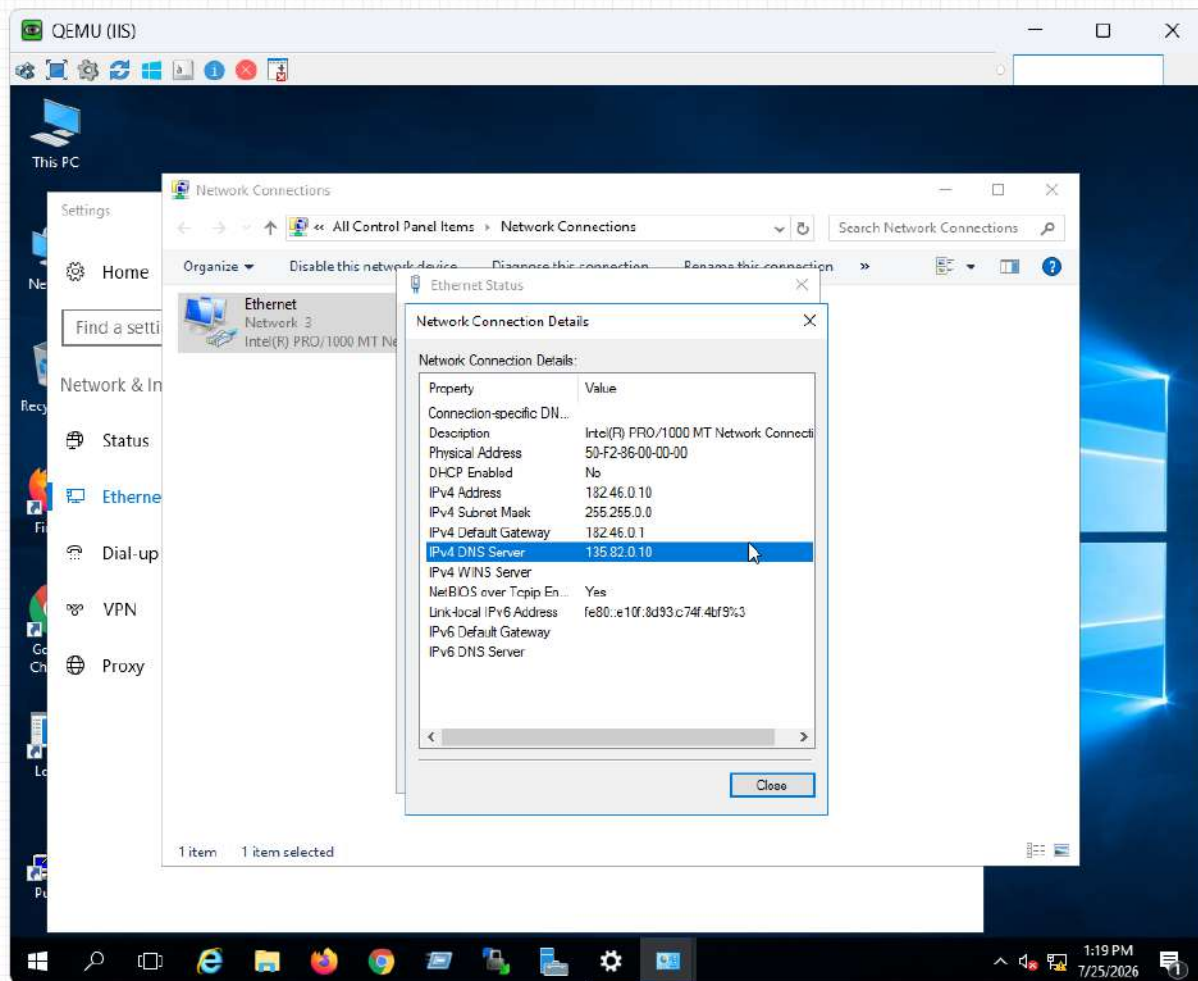QEMU (DNS)

DNS Manager

File Action View Help

Hotstar
instagram
netflix
surennetwork
youtube
Reverse Lookup Zone
Trust Points
Conditional Forwarder

Name	Type	Data	Timestamp
www	Host (A)	182.46.0.10	static

DNS Manager

File Action View Help

Name	Type	Data	Timestamp
www	Host (A)	200.10.156.10	static

DNS Manager

File Action View Help

Name	Type	Data	Timestamp
www	Host (A)	10.0.0.10	static

com
facebook
gmail
Hotstar
instagram

Google Chrome

DNS Manager

File Action View Help

DNS

SERVER2016

Forward Lookup Zone

com

facebook
gmail

DNS

SERVER2016

Forward Lookup Zone

com

facebook

Name	Type	Data	Timestamp
www	Host (A)	200.10.156.30	static

10.10

Linux 1

10.10

QEMU (Win2)

IIS Windows Server - Windows Internet Explorer

http://182.46.0.10/

File Edit View Favorites Tools Help

Windows Server

Internet Information Services

Welcome Bienvenue Tervetuloa

ようこそ Benvenuto 歓迎

Bienvenido Hoş geldiniz ברוכים הבאים Welkom

Bem-vindo

Καλώς ορίσαστε Välkommen 환영합니다 Добро пожаловать Üdvözlünk

Microsoft Willkommen Velkommen Witamy

http://go.microsoft.com/fwlink?linkid=66138&cid=0x409

Start IIS Windows Server - ...

Internet 100% 2:28 PM