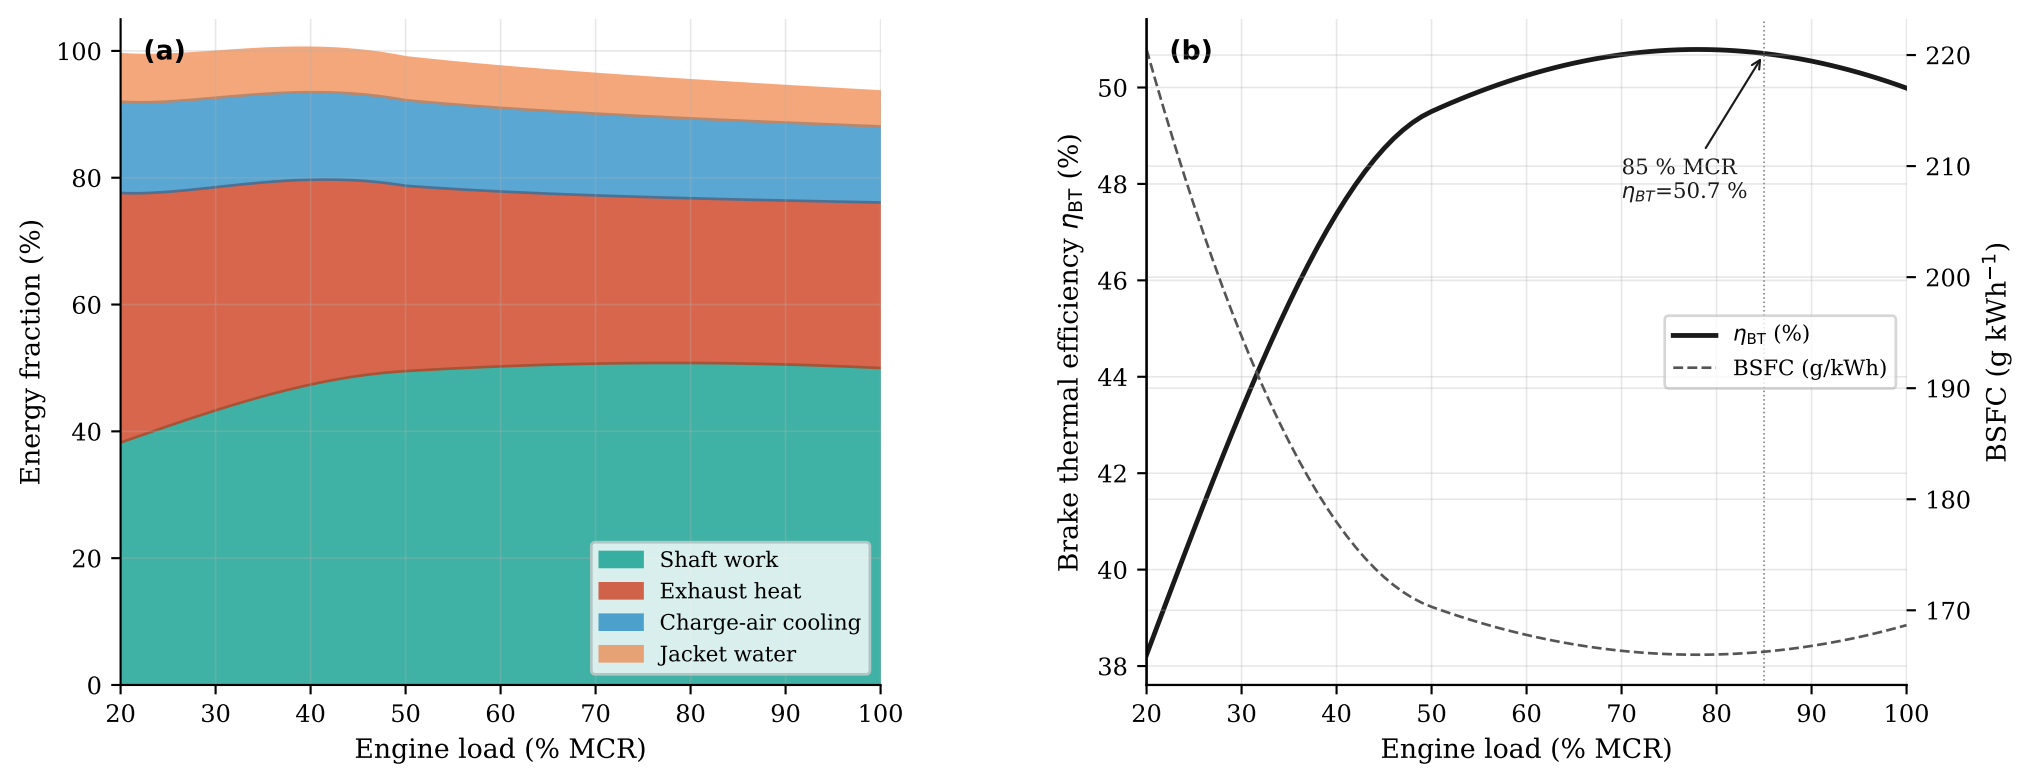
(a)
Energy fraction (%)
Engine load (% MCR)
Shaft work
Exhaust heat
Charge-air cooling
Jacket water
(b)
Brake thermal efficiency η_{BT} (%)
BSFC (g kWh^{-1})
Engine load (% MCR)
85 % MCR
η_{BT}=50.7 %
η_{BT} (%)
BSFC (g/kWh)