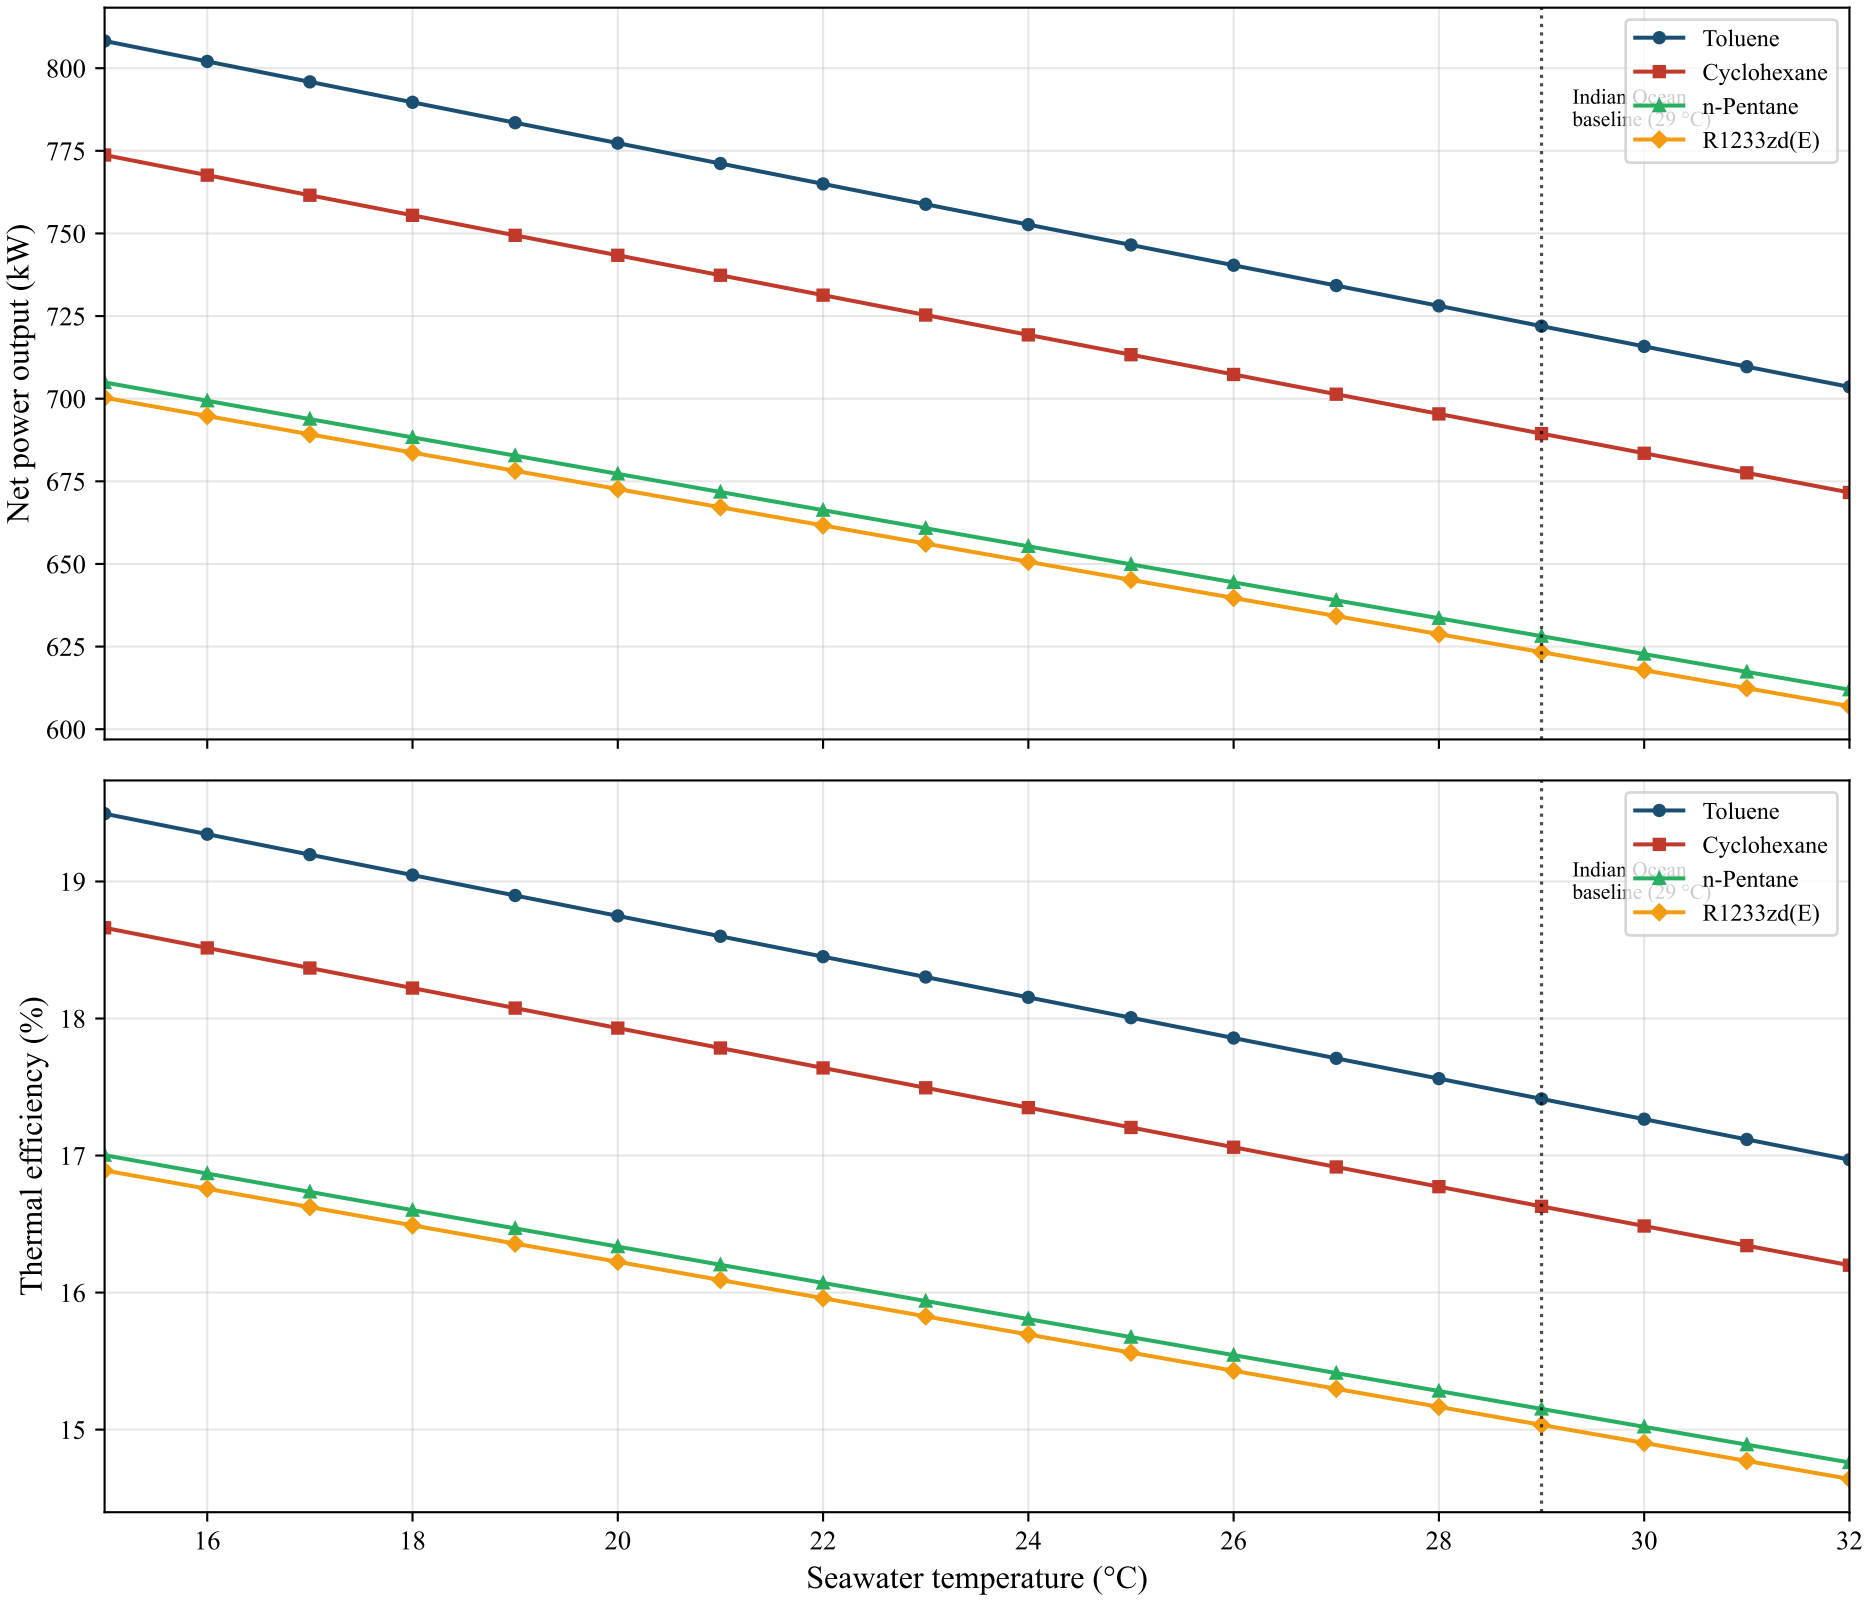
Seawater temperature sensitivity — top four working fluids
(85% MCR; slope ≈ 0.76%/K; fluid ranking invariant over 15–32 °C)
Net power output (kW)
Thermal efficiency (%)
Seawater temperature (°C)
Toluene
Cyclohexane
n-Pentane
R1233zd(E)
Indian Ocean baseline (29 °C)